



POWER ACOUSTIK®

INNOVATOR IN MOBILE ENTERTAINMENT

2013

POWERACOUSTIK.COM

RAZOR

AMPLIFIERS

We're in a time where small is "in". Smaller, more economical vehicles are more and more desirable. But that doesn't mean you have to sacrifice big power for your system. The new Razor amplifiers pack huge amount of power into small chassis thanks to efficient Full-Range Class D topology and SMT technology. Complimented with every possible preamp adjustment, the Razor amplifiers leave nothing to be desired...



- Small Compact 4.75" Wide Chassis
- 4-ohm Bridged/2-ohm Stereo Class D Full Range
- 2-Ohm Stable Class D Monoblocks
- MOSFET PWM Power Supply
- 80Hz 12dB HP or LP Crossover (2/4 ch.)
- 50-250Hz Variable 12dB LP Crossover (mono)
- 10-50Hz Variable 12dB Subsonic Crossover (mono)
- 12dB 45Hz Bass Boost (mono)
- 200mv-6V Low Level Input Sensitivity
- High Level Input
- Dash Mount Remote Gain Control Included

RAZOR CLASS D	Max Power (watts)	RMS Power 4Ω Bridged, 14.4V	RMS Power 2Ω, 14.4V	RMS Power 4Ω, 14.4V	Dimensions (4.75"w x 1.625"h)	Remote Gain Included
RZ2-1300D	1,300	1 x 540	2 x 270	2 x 185	5.5"	Included
RZ4-1200D	1,200	2 x 300	4 x 150	4 x 100	9"	-
RZ4-2000D	2,000	2 x 500	4 x 250	4 x 190	11"	-
RZ5-2100D	2,100	2 x 220 + 1 x 450	4 x 120 + 1 x 450	4 x 80 + 1 x 300	11"	Included
RZ1-1500D	1,500	-	1 x 900	1 x 600	10"	Included
RZ1-2300D	2,300	-	1 x 1,400	1 x 900	11"	Included

GOTHIC

AMPLIFIERS

When something works so well, outperforms the competition, and has done this for 10 years, you don't mess with it! All ya got ta do is just make it look awesome again for current times. What else can we say? Gothic amps are stickin' and kickin'!



- Regulated PWM MOSFET Power Supply
- Black Brushed Aluminum Finish
- 2-Ohm Stereo/4-ohm Bridged Stable Class A/B
- 2-Ohm Stable Class A/B Monoblocks
- 1-Ohm Stable Class D Monoblocks
- Regulated MOSFET PWM Power Supply
- Three-Way Protection Circuitry
- High Level Input w/ Signal Sense
- 200mV-6V Low Level Inputs
- Pre-Amp Low-Level Outputs
- 4g Power/Ground & 8ga Speaker Terminals
- Variable High, Low, & Subsonic Crossovers
- Variable 0-12dB 40Hz Bass Boost
- Remote Mount Gain Control Included
- Class D Monoblocks Strapable w/ 2-Ohm

Class A/B Full Range	Max Power (watts)	RMS Power 4Ω Bridged, 14.4V	RMS Power 2Ω, 14.4V	RMS Power 4Ω, 14.4V	Dimensions (9.75"w x 2.5"h)	Remote Gain Included
GT2-400	400	1 x 160	2 x 80	2 x 60	7"	-
GT2-600	600	1 x 240	2 x 120	2 x 90	7.75"	-
GT2-900	900	1 x 360	2 x 180	2 x 135	9"	-
GT2-1300	1,300	1 x 520	2 x 260	2 x 200	11.75"	Included
GT2-1800	1,800	1 x 720	2 x 360	2 x 280	13.7"	Included
GT4-400	400	2 x 90	4 x 40	4 x 30	4.75"	-
GT4-900	900	2 x 190	4 x 95	4 x 75	9"	-
GT4-1200	1,200	2 x 250	4 x 125	4 x 100	11.5"	-
GT4-1800	1,800	2 x 380	4 x 190	4 x 150	13.75"	-
GT4-2600	2,600	2 x 550	2 x 275	4 x 215	15.75"	-
GT5-2500	2,500	2 x 250, 1 x 600	4 x 125, 1 x 600	4 x 100, 1 x 480	15.75"	Included

Class D Monoblock	Max Power (watts)	RMS Power 1Ω, 14.4	RMS Power 2Ω, 14.4V	RMS Power 4Ω, 14.4V	Dimensions (9.75"w x 2.5"h)	Remote Gain Included
GT1-1000 (A/B)	1,000	-	470	375	9"	Included
GT1-1600 (A/B)	1,600	-	750	600	11.5"	Included
GT1-2400D	2,400	1,500	1,150	900	10.75"	Included
GT1-3500D	3,500	2,100	1,650	1,300	11.75"	Included
GT1-4500D	4,500	2,700	2,200	1,700	14.75"	Included
GT1-6000D	6,000	3,700	3,000	2,300	17.5"	Included

AMPLIFIERS

BAMF

Sometimes you have to call them like you see them: these full MOSFET amplifiers will tear-up your ride and bring out your inner beast. You won't have one seal left in your car to keep water out! This is a (B)ad (A) __ (M) other (F)letcher.



- All MOSFET Transistor Amplifier
- Regulated PWM Power Supply
- Die-Cast Aluminum Chassis
- Jet Black Texture Coat Finish
- Side Pre-Amp and Connections
- Top Panel Status Indicators
- Chassis Integrated Mounting Feet
- 200mV-6V Low Level Inputs
- Direct Input 4 ga. Power & 8 ga. Speaker Terminals
- 2-Ohm Stable Class A/B Full Range
- 1-Ohm Stable Class D Monoblocks
- Monoblocks Strapable w/ 2 ohm
- Variable 12dB Hi/Low/Subsonic Crossovers
- Variable 12dB/18dB Bass Boost
- 180° Phase Switch
- Dash Mount Remote Gain Module
- Tri-Mode Capable
- Three-Way Protection Circuitry
- Pre-Amp Outputs (ex. 1200/4)

Class A/B Full Range	Max Power (watts)	RMS Power 4Ω Bridged, 14.4V	RMS Power 2Ω, 14.4V	RMS Power 4Ω, 14.4V	Dimensions (2.125"h x 8.25"w)	Bass Knob Included
BAMF800/2	800	1 x 360	2 x 180	2 x 150	10.125"	Included
BAMF1250/2	1,250	1 x 560	2 x 280	2 x 220	11.375"	Included
BAMF1800/2	1,800	1 x 760	2 x 380	2 x 300	13.75"	Included
BAMF2200/2	2,200	1 x 900	2 x 450	2 x 370	15"	Included
BAMF2600/2	2,600	1 x 1,080	2 x 540	2 x 450	16.875"	Included
BAMF1200/4	1,200	2 x 250	4 x 125	4 x 100	11.875"	-
BAMF1600/4	1,600	2 x 360	4 x 180	4 x 150	13.75"	-
BAMF2500/5	2,500	2 x 250 + 1 x 600	4 x 125 + 1 x 600	4 x 100 + 1 x 400	16.875"	Included

Class D Monoblock	Max Power (watts)	RMS Power 1Ω, 14.4V	RMS Power 2Ω, 14.4V	RMS Power 4Ω, 14.4V	Dimensions (2.125"h x 8.25"w)	Bass Knob Included
BAMF2000/1D	2,000	1,200	900	600	11.375"	Included
BAMF4000/1D	4,000	2,200	1,700	1,200	13.75"	Included
BAMF5500/1D	5,500	3,200	2,500	1,700	16.875"	Included

AMPLIFIERS



Music so powerful it makes the dead come to life! Try the Demon amplifiers loaded with the features you expect on models priced much higher than this exquisite series of amplifiers. We provide all the necessary features, including variable 12dB Crossovers, and 2-Ohm stable on all class A/B amps. Full variable crossovers, with 18db. Bass boost and dash mounted sub woofer control. Sporting a new hairline anodized Candy Apple or Midnight Black finish with Skull logo and piercing eyes that light-up when the amp is on.



- Regulated PWM MOSFET Power Supply
- Extruded Aluminum Chassis
- Brushed Aluminum Finish w/ Red Anodizing
- 200mV-6V Low Level Inputs
- High Level Inputs
- 4 ga. Power & 8 ga. Speaker Terminals
- 2-Ohm Stable Class A/B Full Range
- 1-Ohm Stable Class D Monoblocks
- Monoblocks Strapable w/ 2 ohm
- Variable 12dB Hi/Low/Subsonic Crossovers
- Variable 18dB Bass Boost
- 180° Phase Switch
- Dash Mount Remote Gain Module
- Tri-Mode Capable
- Three-Way Protection Circuitry

Class A/B Full Range	Max Power (watts)	RMS Power 4Ω Bridged, 14.4V	RMS Power 2Ω, 14.4V	RMS Power 4Ω, 14.4V	Dimensions (11.25"h x 2.5"w)	Remote Gain Included
Red D2-600	600	260 x 1	130 x 2	100 x 2	8"	-
Black D2-600B	600	260 x 1	130 x 2	100 x 2	8"	-
Red D2-1300	1,300	600 x 1	300 x 2	220 x 2	12.5"	Included
Black D2-1300B	1,300	600 x 1	300 x 2	220 x 2	12.5"	Included
Red D4-1000	1,000	220 x 2	110 x 4	80 x 4	11.25"	Included
Black D4-1000B	1,000	220 x 2	110 x 4	80 x 4	11.25"	Included
Red D4-1400	1,400	300 x 2	150 x 4	120 x 4	13.75"	Included
Black D4-1400B	1,400	300 x 2	150 x 4	120 x 4	13.75"	Included
Red D4-1800	1,800	380 x 2	190 x 4	150 x 4	15.25"	Included
Black D4-1800B	1,800	380 x 2	190 x 4	150 x 4	15.25"	Included
Red D4-2400	2,400	500 x 2	250 x 4	200 x 4	22"	Included
Black D4-2400B	2,400	500 x 2	250 x 4	200 x 4	22"	Included

Class D Monoblock	Max Power (watts)	RMS Power 1Ω, 14.4V	RMS Power 2Ω, 14.4V	RMS Power 4Ω, 14.4V	Dimensions (11.25"h x 2.5"w)	Remote Gain Included
Red D1-2000D	2,000	1,200	900	600	10"	Included
Black D1-2000DB	2,000	1,200	900	600	10"	Included
Red D1-3000D	3,000	1,700	1,300	900	12.5"	Included
Black D1-3000DB	3,000	1,700	1,300	900	12.5"	Included
Red D1-4000D	4,000	2,200	1,700	1,200	16.5"	Included
Black D1-4000DB	4,000	2,200	1,700	1,200	16.5"	Included
Red D1-6000D	6,000	3,500	2,700	1,900	21.25"	Included
Black D1-6000DB	6,000	3,500	2,700	1,900	21.25"	Included

You asked for the "Best bang for the buck" and we delivered it in the Crypt line of amplifiers. This chassis design incorporates new assembly techniques and sheer volume production without sacrificing power and sound quality. We learned some new circuit tricks that will deliver bone shattering power at even lower prices from our previous versions. The kids will love the new "Dead Look" with skulls to match! Who doesn't have tattoo's these days that are skull and crossbones. We have included all the most popular features in this exciting new line-up including complimentary Class "D" amplifiers to match. This new series will drive them crazy.

Everyone loves a little skull now and then!

Crypt

AMPLIFIERS



- Regulated PWM MOSFET Power Supply
- Extruded Aluminum Chassis
- Black Texture Finish w/ Silver Trim & Cast Metal Badge
- 200mV-6V Low Level Inputs
- Pre-Amp Outputs (2 ch. only)
- 4 ga. Power & 8 ga. Speaker Terminals
- 2-Ohm Stable Class A/B Full Range
- 2-Ohm Stable Full Range Monoblocks

- 1-Ohm Stable Class D Monoblocks
- Monoblocks Strapable w/ 2 ohm
- Variable 12dB Hi/Low/Subsonic Crossovers
- Variable 18dB Bass Boost
- 180° Phase Switch
- Dash Mount Remote Gain Module
- Tri-Mode Capable
- Three-Way Protection Circuitry

Class A/B Full Range	Max Power (watts)	RMS Power 4Ω Bridged, 14.4V	RMS Power 2Ω, 14.4V	RMS Power 4Ω, 14.4V	Dimensions (2.3"h x 9.8"w)	Remote Gain Included
CPT2-400	400	1 x 200	2 x 100	2 x 80	9"	-
CPT2-600	600	1 x 250	2 x 125	2 x 100	11"	-
CPT2-900	900	1 x 400	2 x 200	2 x 150	13"	-
CPT2-1500	1,500	1 x 650	2 x 325	2 x 250	15"	-
CPT4-800	800	2 x 200	4 x 100	4 x 80	13"	-
CPT4-1200	1,200	2 x 250	4 x 125	4 x 100	14"	-
CPT4-1400	1,400	2 x 300	4 x 150	4 x 120	15"	-
CPT4-1700	1,700	2 x 380	4 x 190	4 x 150	17"	-

Class D Monoblock	Max Power (watts)	RMS Power 1Ω, 14.4V	RMS Power 2Ω, 14.4V	RMS Power 4Ω, 14.4V	Dimensions (2.3"h x 9.8"w)	Remote Gain Included
CPT1-1500 (A/B) (A/B)	1,500	-	650	500	13"	Included
CPT1-2000 (A/B)	2,000	-	870	670	15"	Included
CPT1-2200D	2,200	1,300	950	700	12"	Included
CPT1-3200D	3,200	1,800	1,400	1,000	13"	Included
CPT1-4000D	4,000	2,200	1,700	1,200	16"	Included
CPT1-5500D	5,500	3,200	2,500	1,700	19"	Included

"Not just the Reaper, it's the Grimm Reaper"

You may have a need to have music move you in ways no one else can understand. The Reaper is capable of delivering music so low and so loud that it could possibly disembowel you. You don't need to wear a black cloak but I would suggest you buy a space pressure suit to keep your internal organs in place. The beauty is we can take high level six-volt inputs or low level RCA's and turn that music into a signal strong enough to shatter glass. Many models include dash mounted sub controls and our Class "D" amplifiers are Strapable in two ohm loads. Don't settle for second best, let the reaper deliver you!



- Class A/B & D MOSFET Power Amplifier
- 2-Ohm Stable Class A/B Full Range
- 2-Ohm Stable Class A/B Monoblock
- 1-Ohm Stable Class D Monoblocks
- Class D Monoblocks Strapable w/ 2 ohm
- Variable 12dB Hi/Low/Subsonic Crossovers
- Variable 12dB 45Hz Bass Boost (select models)
- 180° Phase Switch (select monoblocks)
- High Level Speaker Signal Inputs
- 200mV-6V Low Level RCA Signal Inputs
- Pre-Amp Low Level RCA Output (select models)
- 4ga Power/Ground & 8ga Speaker Terminals
- Dash Mount Remote Gain Control (class D models)
- Tri-Mode Capable (class A/B models)
- Three-Way Protection Circuitry

Class A/B Full Range	Max Power (watts)	RMS Power 4Ω Bridged, 14.4V	RMS Power 2Ω, 14.4V	RMS Power 4Ω, 14.4V	Dimensions (2.5"h x 9"w)	Remote Gain Included
REP2-450	450	1 x 220	2 x 110	2 x 85	7"	-
REP2-1300	1,300	1 x 520	2 x 260	2 x 200	12.50"	-
REP4-900	900	2 x 220	4 x 110	4 x 85	10.00"	-
REP4-1400	1,400	2 x 320	4 x 160	4 x 120	12.50"	-
REP4-1700	1,700	2 x 420	4 x 210	4 x 160	14.00"	-
REP4-2300	2,300	2 x 520	4 x 260	4 x 200	15.50"	-

Class D Monoblock	Max Power (watts)	RMS Power 1Ω, 14.4V	RMS Power 2Ω, 14.4V	RMS Power 4Ω, 14.4V	Dimensions (2.5"h x 9"w)	Remote Gain Included
REP1-2000 (A/B)	2,000	-	900	650	11.75"	Included
REP1-2100D	2,100	1,200	950	700	9.75"	Included
REP1-2700D	2,700	1,500	1,200	950	11"	Included
REP1-3500D	3,500	2,000	1,500	1,200	12.75"	Included
REP1-6000D	6,000	3,300	2,500	1,900	17.25"	Included

AMPLIFIERS

Reaper

MOFO X motors are refined and increase efficiency dramatically! MOFO-X subs use a composite sandwich cone with a polypropylene surface for durability and Spruce pulp backing for smooth low bass. Like the original MOFOs, the new models still use an aluminum dustcap that couples to the voice coil former and extends over the cone. Why? The fins brace the cone and eliminate cone flex during high excursion. And since they are aluminum and couple to the dust cap and coil former, they act as a heatsink or heat extractor. Using the latest materials, the new MOFO subs yield superior performance. Cast aluminum baskets? Of course! Increased bottom octave output? You Bet! Louder than the original design? Duh!!

SUBWOOFER

MOFO

GOTHIC

SUBWOOFER

MOFO Features

- Royal Blue Finish w/ Diamond Cut Accents
- Die Cast Aluminum Voice Coil Heatsink
- Die-Cast Aluminum Frame
- Vented Pole Piece
- 2.5" 4-Layer Voice Coil
- 373oz. Motor Assembly
- Non-Pressed Pulp Cone
- Polyether Foam Surround
- Dual Poly-Cotton Spiders
- Nickel Plated 8ga Compression Wire Terminals



Complete Re-cone Kit Available

Twisted & Woven Flax Fiber Cone

All Gothic woofers use torsion twisted Flax fibers woven together for ultimate strength and less elasticity. A heavy soaking in epoxy combined with the sonic qualities of pulp paper, Flax proves itself worthy of any system.

Extended Excursion NBR Surround

A strong and flexible heat resistant compound, nitrile butadiene rubber is used widely in automotive applications. Gothic woofers utilize an extended excursion NBR surround for its strength and flexible properties during extreme movement.

Back Plate & T-Yoke Venting

Heat build-up is a leading cause of catastrophic woofer failure. Venting built into the T-Yoke, back plate, and voice coil extract and dissipate heat, ensuring Gothic woofers keep their cool.

Overcast Stitched Cone Assembly

Surrounds of Gothic woofers are double overcast stitched directly to the Flax cone surface. In addition to superior adhesives, overcast stitching improves the conventional bond between cone and surround.

100% OFC 4-Layer Voice Coil

Gothic woofers use generous 1.50" long, 2.5" diameter 100% OFC Copper voice coils. A vented Aluminum former extract and dissipate any heat build-up, resulting in improved power handling.


Model #	MAX Power	RMS Power	Efficiency (1w/1m dB)	Voice Coil Configuration	Mounting Depth	Optimum Sealed ft ³	Optimum Ported
MOFO-122X	2,700	1,500	85.37	2.5" Dual 2Ω	6.875"	1.00	2.00
MOFO-124X	2,700	1,500	85.40	2.5" Dual 4Ω	6.875"	1.00	2.00
MOFO-152X	3,000	1,700	86.90	2.5" Dual 2Ω	8.125"	2.00	4.00
MOFO-154X	3,000	1,700	86.97	2.5" Dual 4Ω	8.125"	2.00	4.00

Gothic Subwoofers	Max Power Handling	RMS Power Handling	Efficiency (1w/1m)	Voice Coil Configuration	Motor Volume	Mounting Depth	Optimum Sealed Enclosure ft ³	Optimum Ported Enclosure ft ³
GW3-10	2,200	1,000	81.30	2.50" Dual 2Ω	204oz.	6.00"	1.00	1.50
GW3-12	2,500	1,200	83.60	2.50" Dual 2Ω	254oz.	6.50"	1.50	2.25
GW3-15	3,000	1,400	84.00	2.50" Dual 2Ω	254oz.	7.50"	2.75	3.25

Crypt SUBWOOFER

SUBWOOFER

Reaper

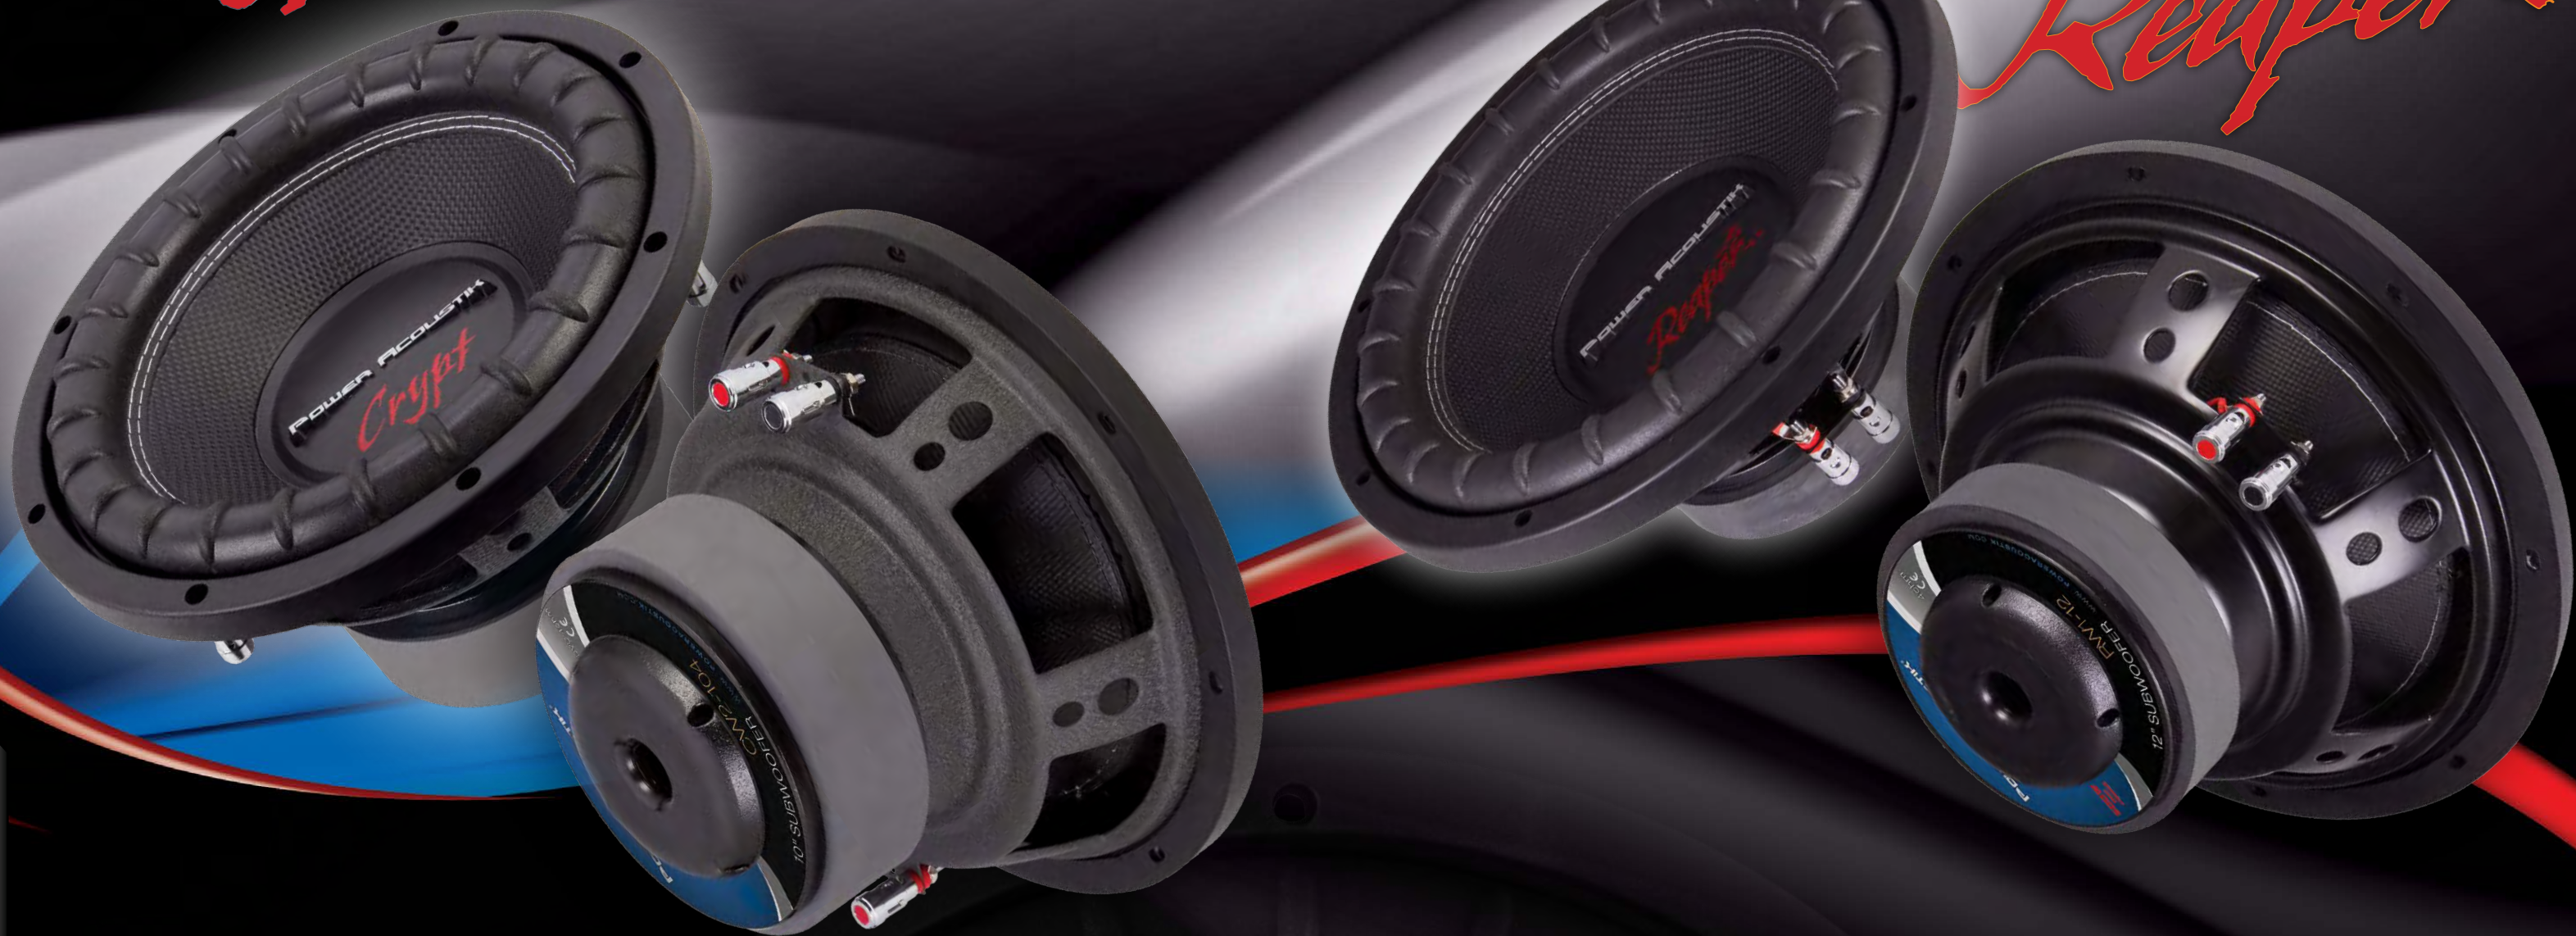

Closed Cell Polyurethane Surround

Polyurethane is a foam compound used in the manufacture of countless gasket and insulation products, known for its adhesive bonding properties. Crypt PU surrounds also have built-in expansion pockets to flex and relieve stresses during extreme use.

Back Plate & T-Yoke Venting

Heat build-up is a leading cause of catastrophic woofer failure. Venting built into the T-Yoke, back plate, and voice coil extract and dissipate heat, ensuring Crypt woofers keep their cool.

Overcast Stitched Cone Assembly

Surrounds of Crypt woofers are double overcast stitched directly to the cone surface. In addition to superior adhesives, overcast stitching improves the conventional bond between cone and surround.

100% OFC 4-Layer Voice Coil

Crypt woofers use generous 1.25" long, 2.00" diameter 100% OFC Copper voice coils. A vented Aluminum former extract and dissipate any heat build-up, resulting in improved power handling.

Closed Cell Polyurethane Surround

Polyurethane is a foam compound used in the manufacture of countless gasket and insulation products, known for its adhesive bonding properties. Reaper PU surrounds also have built-in expansion pockets to flex and relieve stresses during extreme use.

Back Plate & T-Yoke Venting

Heat build-up is a leading cause of catastrophic woofer failure. Venting built into the T-Yoke, back plate, and voice coil extract and dissipate heat, ensuring Reaper woofers keep their cool.

Overcast Stitched Cone Assembly

Surrounds of Reaper woofers are double overcast stitched directly to the cone surface. In addition to superior adhesives, overcast stitching improves the conventional bond between cone and surround.

100% OFC 4-Layer Voice Coil

Reaper woofers use 1" long, 2" diameter 100% OFC Copper voice coils. A vented Aluminum former extract and dissipate any heat build-up, resulting in improved power handling.

Crypt Subwoofers	Max Power Handling	RMS Power Handling	Efficiency (1w/1m)	Voice Coil Configuration	Motor Volume	Mounting Depth	Optimum Sealed Enclosure ft³	Optimum Ported Enclosure ft³
CW2-102	1,800	720	88.40	2.00" Dual 2Ω	162oz.	5.875"	1.00	1.50
CW2-104	1,800	720	88.40	2.00" Dual 4Ω	162oz.	5.875"	1.00	1.50
CW2-122	2,000	850	89.90	2.00" Dual 2Ω	190oz	6.375"	1.25	1.75
CW2-124	2,000	880	89.90	2.00" Dual 4Ω	190oz	6.375"	1.25	1.75
CW2-152	2,200	1,000	88.90	2.00" Dual 2Ω	190oz	7.25"	2.50	3.00
CW2-154	2,200	1,000	88.90	2.00" Dual 4Ω	190oz	7.25"	2.50	3.00

Reaper Subwoofers	Max Power Handling	RMS Power Handling	Efficiency (1w/1m)	Voice Coil Configuration	Motor Volume	Mounting Depth	Optimum Sealed Enclosure ft³	Optimum Ported Enclosure ft³
RW1-8	600	240	89.50	2.00" Single 4Ω	86oz.	4.25"	0.50	1.00
RW1-10	900	360	87.30	2.00" Single 4Ω	104oz.	4.875"	1.00	1.50
RW1-12	1,200	500	89.20	2.00" Single 4Ω	127oz.	5.75"	1.25	1.75

SUBWOOFER

Reaper



- Injection Molded Polypropylene Cone
- NBR Rubber Surround
- Vented Back Plate Pole Piece
- Quick Disconnect Terminals
- Pressed Steel Frame

Many vehicles do not have tons of space available for a big, bulky enclosure. Some vehicle, like some crew-cab trucks, have no space for a subwoofer. Until now... The THIN-13 is now the shallowest woofer on the market! Coming in at a mere 2" of depth, they will fit behind rear crew-cab truck seats, under many front seats, or even in a friggin' door with some custom fabrication! While other "shallow mount" subwoofers are available, they typically require traditional airspace. The THIN-13 is 13.25" in diameter and not only does it play in enclosures as small as .5 cubic foot well (typical for most 8"-10" woofers), but it reproduces lower frequency response than most 12" woofers in much larger enclosures. No more whining about not having a subwoofer available that will fit in virtually every vehicle! THIN-13 has you covered...

SUBWOOFER

THIN



Thin-13 Woofer Preloaded in THIN-13BX



THIN-13BX Preloaded Enclosure

- 13" THIN Shallow Mount Subwoofer Enclosure
- 700w MAX Power Handling
- 4-Ohm Impedance
- .6 cubic foot Preloaded Enclosure
- Carpeted Grey w/ Embroidered Accents
- 30" l x 14.5" h x 5.25" / 2.25" d



THIN-10BX Preloaded Enclosure

- Pre-loaded Enclosure w/ 10" Subwoofer
- 4 Ohm Impedance
- 550W Power Handling
- Carpeted Black w/ Embroidered Accents
- 25.5" l x 13.5" h x 4.5" / 2.125" d



THIN-12BX Preloaded Enclosure

- Pre-loaded Enclosure w/ 12" Subwoofer
- 4 Ohm Impedance
- 650W Power Handling
- Carpeted Black w/ Embroidered Accents
- 29.75" l x 14.5" h x 5.75" / 2.25" d

Reaper Subwoofers	Max Power Handling	RMS Power Handling	Efficiency (1w/1m)	Voice Coil Configuration	Motor Volume	Mounting Depth	Optimum Sealed Enclosure ft ³	Optimum Ported Enclosure ft ³
REP-12	600	200	85.60	1.50" Single 4Ω	76oz.	5.00"	1.00	2.00

COMPONENT

XP-60C 6.5" Component System

- 300W Max Power Handling
- 4-ohm System Impedance
- Presed Paper/Polypropylene Cone
- NBR Rubber Surround
- 1" Voice Coil on Aluminum Former
- Quick Disconnect Terminals
- Conex Spider Suspension
- 1" Soft Dome Tweeter
- Flush, Surface, and Angle Mount
- Passive Crossover Included
- Speaker Grill Included
- Frequency Response: 50-20kHz
- Sensitivity: 96dB
- Mounting Depth: 2.5"



CPT-60C 6.5" Component System

- 160W Max Power Handling
- 4-Ohm System Impedance
- Polypropylene Injection Come
- NBR Rubber Surround
- 1" Voice Coil on Aluminum Former
- Quick Disconnect Terminals
- Conex Spider Suspension
- 1" Flush Mount Dome Tweeter
- Passive Crossover Included
- Speaker Grill Included
- Freq-Response: 70-20kHz
- Sensitivity: 92dB
- Mounting Depth: 2.5"



SPEAKERS XP



XP-653K 6.5"

- Black Texture Coat Stamped Steel Frame
- Chrome Back Plate
- Poly Propylene Injection Cone
- Butyl Rubber Surround
- 3-Ohm Impedance
- 1" Silk Midrange (694K)
- .75" Silk Tweeter
- .5" Silk Super Tweeter (694K, 653K & 573K)



XP-694K 6" x 9"



XP-502K 5.25"



XP-462K 4" x 6"



XP-573K 5" x 7"/6" x 8"



XP-402K 4"



XP-4103K 4" x 10"

Model #	Size & Type	RMS Power	Magnet Volume (oz)	Frequency Response	Efficiency (1w/1m dB)	Mounting Depth
XP-694K	6x9 4-way	420	20 oz.	45-20kHz	90 dB	3.125"
XP-653K	6.5" 3-way	250	10 oz.	65-20kHz	89 dB	2.125"
XP-573K	5" x 7" 3-way	270	10 oz.	65-20kHz	88 dB	2.25"
XP-502K	5.25" 2-way	200	10 oz.	80-20kHz	88 dB	2.125"
XP-462K	4" x 6" 2-way	200	5.3 oz.	100-20kHz	86 dB	1.75"
XP-4103K	4" x 10" 3-way	270	10 oz.	65-20kHz	88 dB	2.5"
XP-402K	4" 2-way	180	5.3 oz.	100-20kHz	86 dB	1.875"

Crypt

Reaper

- IMPP Polypropylene Cone
- NBR Rubber Surround
- 1" Voice Coil on Aluminum Former
- 4-ohm System Impedance
- Quick Disconnect Terminals
- 1.125" Mylar Midrange (CF-694)
- 1" Mylar Tweeter
- .5" Super Tweeters

Crypt	Size & Type	MAX Power	Magnet Volume (oz)	Frequency Response	Efficiency (1w/1m dB)	Mounting Depth
CF-694	6"x9" 4-way	380w	30 oz.	45-20kHz	90dB	3.25"
CF-573	5" x 7" 3-way	240w	10 oz.	65-20kHz	89dB	2.125"
CF-653	6.5" 3-way	220w	10 oz.	65-20kHz	89dB	2.125"
CF-502	5.25" 2-way	180w	10 oz.	80-20kHz	87dB	2"
CF-402	4" 2-way	160w	5.3 oz.	100-20kHz	87dB	1.875"

- Vacuum Form Polypropylene Cone
- NBR Rubber Surround
- 1" Voice Coil on Aluminum Former
- 4-ohm System Impedance
- Quick Disconnect Terminals
- 2" Mylar Midrange (RF-693)
- 1" Mylar Tweeter

Reaper	Size & Type	MAX Power	Magnet Volume (oz)	Frequency Response	Efficiency (1w/1m dB)	Mounting Depth
RF-693	6"x9" 3-way	330w	24.3 oz	45-20kHz	88dB	3.25"
RF-573	5" x 7" 3-way	200w	6.50 oz	65-20kHz	87dB	1.75"
RF-652	6.5" 2-way	190w	6.50 oz	65-20kHz	88dB	1.75"
RF-502	5.25" 2-way	160w	4.25 oz	80-20kHz	86dB	2.125"
RF-402	4" 2-way	140w	4.00 oz	100-20kHz	86dB	1.75"

NB-1 2-Way Mount Tweeter 200 Watts

- Niobium Rare Earth Ferroelectric Transducer Magnet
- Polypropylene Diaphragm
- 100 Watts R.M.S.
- Freq. Resp. 5kHz to 25KHz
- Imp. 4 Ohm
- Surface/Angle Mount
- SPL 97 dB
- Built in Crossover



NB-2 3-Way Mount Tweeter 200 Watts

- Niobium Rare Earth Ferroelectric Transducer Magnet
- Polypropylene Diaphragm
- 100 Watts R.M.S.
- Freq. Resp. 5kHz to 25KHz
- Imp. 4 Ohm
- Surface/Angle Mount/Flush Mount
- SPL 97 dB
- Built in Crossover



NX-5 Bullet Tweeter 200 Watts MAX

- 1" Horn Loaded Bullet tweeter
- Machined Aluminum Chassis
- Titanium Dome Diaphragm
- 1" High Temperature Voice Coil
- Acrylic Phase Plug
- High Strength Neodymium Magnet
- Freq. Resp 3kHz-20kHz
- Impedance: 3 ohm
- Efficiency: 109dB
- Sold in pairs



NX-2 Horn Tweeter 160 Watts MAX
NX-3 Horn Tweeter 200 Watts MAX

- Horn Loaded Compression Tweeter
- 1" Aluminum Dome Diaphragm (NX-2)
- 1.75" Aluminum Dome Diaphragm (NX-3)
- Phase Inversion Plug
- 6dB Crossover Capacitor Included
- Freq. Resp 3kHz - 20KHz
- 4-Ohm Impedance
- Efficiency: 106dB (NX-2)
- Efficiency: 109dB (NX-3)
- Sold Individually



NX-6 Horn Tweeter 200 Watts MAX

- Horn Loaded Compression Tweeter
- 1" Aluminum Dome Diaphragm
- 6dB Capacitor Crossover
- Freq. Resp 2.2kHz-20kHz
- Impedance 3 ohm
- Efficiency: 108dB
- Sold Individually



MID-65 6.5" Midrange 300 Watts MAX

- .25" High Temperature Voice Coil
- Heavy Gauge Stamped Steel Basket
- High Strength Magnet
- req. Resp 150Hz - 15KHz
- Impedance: 4 ohm
- Efficiency: 96dB
- RMS Power Handling: 150w
- Sold Individually



NB-4 4-Way Mount Tweeter 250 Watts

- Niobium Rare Earth Ferroelectric Transducer Magnet
- Polypropylene Diaphragm
- Freq. Resp. 5kHz to 25KHz
- Imp. 4 Ohm
- Swivel/Surface/Angle Mount/Flush Mount
- SPL 97 dB
- Built in Crossover



PRO Audio Neodymium Midrange Speakers



PRO Audio Midrange Speakers



XPS-104 4" Midrange

- 300 watts max
- .75" Voice Coil
- Freq. Resp. 450 Hz. to 10kHz.
- 15 oz. Magnet
- Imp. 4 Ohm
- SPL 92 dB
- Mounting Depth: 1.75"
- Sold Individually



PRO AUDIO	PR-654N	PR-804N
Size	6.5"	8"
Max Power Handling	250	350
Impedance	4Ω	4Ω
Frequency Response	180-10kHz	135-8kHz
Efficiency (1w/1m)	97dB	98dB
Mounting Depth	3.00"	3.25"

PRO AUDIO	PRO.654	PRO.658	PRO.804	PRO.808	PRO.104
Size	6.5"	6.5"	8"	8"	10"
Max Power Handling	170	170	200	200	350
Impedance	4Ω	8Ω	4Ω	8Ω	4Ω
Frequency Response	150-10kHz	150-10kHz	120-8kHz	120-8kHz	100-5kHz
Efficiency (1w/1m)	96dB	96dB	97dB	97dB	98dB
Mounting Depth	2.75"	2.75"	3.25"	3.25"	4.25"

CAPACITORS

PC1.5F 1.5 Farad Power Capacitor



Terminal Post for Ring Terminal
Digital Voltage Meter
Translucent Mounting Brackets
Brushed Aluminum Finish

PC2.0F 2 Farad Power Capacitor



12-16 DC Volts Operation
Terminal Post for Ring Terminal
Digital Voltage Meter
Translucent Mounting Brackets
Chrome Plated Finish


PCX-3F 3 Farad Power Capacitor PCX-5F 5 Farad Power Capacitor

12-16 DC Volts Operation
Terminal Post for Ring Terminal
Digital Voltage Meter
Polarity & Voltage Protection
Protection Alert Indicator
LED Accent Lighting
Satin Finish w/ Chrome Accents



PCX-10F 10 Farad Hybrid Power Capacitor PCX-20F 20 Farad Hybrid Power Capacitor PCX-30F 30 Farad Hybrid Power Capacitor

12-16 DC Volts Operation
Internally Stacked Carbon-Foil Capacitors
Direct Connect 0 ga. Terminals & 4 ga. Reducers
Digital Voltage Meter
Polarity & Voltage Protection
Protection Alert Indicator
LED Accent Lighting
Satin Finish w/ Chrome Accents

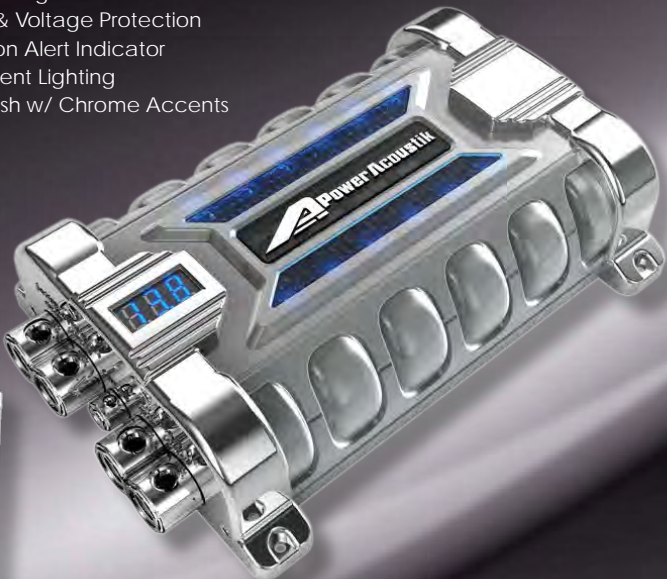

AMP WIRE KITS

AKIT-2 17ft. 2ga. Kit

- Matte/Clear Power & Ground Wire
- 30ft 12ga Matte Blue/Clear Twisted Pair Speaker Wire
- 17ft. Blue/Clear Twisted Pair RCA & Remote Wire
- 80A ANL Fuse & Holder
- Complete Installation Accessories

AKIT-4 17ft. 4ga. Kit

- Matte/Clear Power & Ground Wire
- 25ft 12ga Matte Blue/Clear Twisted Pair Speaker Wire
- 17ft. Blue/Clear Twisted Pair RCA & Remote Wire
- 60A Maxi Fuse & Holder
- Complete Installation Accessories

AKIT-8 17ft. 8ga. Kit

- Matte/Clear Power & Ground Wire
- 25ft 16ga Matte Blue/Clear Twisted Pair Speaker Wire
- 17ft. Blue/Clear Twisted Pair RCA & Remote Wire
- 40A Maxi Fuse & Holder
- Complete Installation Accessories

AKIT-44 17ft. 4ga. 4 ch. Kit

- Matte/Clear Power & Ground Wire
- 40ft 16ga Matte Blue/Clear Twisted Pair Speaker Wire
- 2 pcs. 17ft. Blue/Clear Twisted Pair RCA & Remote Wire
- 60A Maxi Fuse & Holder
- Complete Installation Accessories



WINDOW FILM TINT

Automotive and Commercial Application Window Tint

Our window film uses impregnated color chips and twin UV inhibitors in the initial manufacturing process. This insures maximum benefit for your interior. Traditional manufacturing process uses clear chips and adds dyes, pigments, or spray-on colors, and a UV inhibitor in the adhesive.

Additional Benefits

- Color-stable film that never bubbles, peels, or turns purple over time
- Malleable for seamless attachment to curved surfaces
- American made adhesives for impervious seal and undistorted views
- Reduces heat, glare and overall energy costs when used in home or auto
- Eliminate harmful UV by 99% to protect interior materials in home or auto
- Lifetime Warranty with Everlast Series, Made in U.S.A.
- 4-Year Prorated Warranty with Elite Series
- Available in 20", 24", 36", 40" Width, all in 100ft. length
- Everlast Series Available in 60" Width

Everlast Series

EV-05	6% VLT
EV-15	16% VLT
EV-20	21% VLT
EV-35	35% VLT
EV-50	51% VLT

Elite Series

LT-05	6% VLT
LT-20	22% VLT
LT-35	33% VLT
LT-50	51% VLT



AUDIO PROCESSORS

BASS-10C Bass Maximizer



- PWM High Head Room Power Supply
- 27-63Hz Parametric Bass Boost
- Variable Bandwidth Adjustment
- Max Output Level: 13.5 volt
- Dash Mount Remote Control
- LED MAX Bass Indicators
- Selectable Subsonic Filter
- Balanced RCA Inputs
- Selectable Input Ground Sources
- Selectable Grounding Isolation
- Frequency Response: 10-100kHz
- THD: 0.003%
- S/N Ratio: 130dB
- Input Noise Rejection: 60 dB

BASS-12C Bass Maximizer



- Chrome Finish w/ Illuminated Badge
- PWM High Head Room Power Supply
- 27-63Hz Parametric Bass Boost
- Variable Bandwidth Adjustment
- Max Output Level: 13.5 volt
- Dash Mount Remote Control
- LED MAX Bass Indicators
- 35-80Hz Variable Subsonic Filter
- Balanced RCA Inputs
- Selectable Input Ground Sources
- Selectable Grounding Isolation
- Frequency Response: 10-100kHz
- THD: 0.003%
- S/N Ratio: 130dB

C-30XR 3-Way 12dB Electronic Crossover



- 6-Channel Low-Level Input
- 6-Channel Low-Level Output w/ 5V Gain
- 2/4 Channel Input Selection
- Independent Front/Rear High Pass
- Independent Subwoofer Low Pass
- Stereo or Mono Subwoofer Output Selection
- 180° Phase Switch
- Variable Frequency & Gain Bass Boost
- Dash Mount Remote Subwoofer Gain Module
- S/N Ratio: 95dB
- Channel Separation: 60dB

PWM-70 7-Band 1/2 DIN Equalizer



- 2 Selectable Balanced Inputs
- Selectable Input Sensitivity
- 7 bands +/- 18dB Parametric Equalizer
- Independent Volume & Fader Control
- Independent Subwoofer Output and Level Control
- Selectable Subwoofer Low-Pass Crossover
- 8V MAX Front, Rear, & Subwoofer Outputs
- Low Noise BI-FET Op-Amp for Minimum Distortion
- 20dB Headroom, 30V Bipolar Power Supply
- Blue LED Backlighting
- S/N Ratio 110dB @1V
- THD:0.05%

PWM-20 4-Band 1/2 DIN Equalizer



- 2 Selectable Balanced Inputs
- Variable Stereo Input Sensitivity
- 4 Variable Frequency Bands +/- 18dB Parametric Equalizer
- Independent Volume & Fader Control
- Independent Subwoofer Output and Level Control
- Variable Subwoofer Low-Pass Crossover
- 8V MAX Front, Rear, & Subwoofer Outputs
- Low Noise BI-FET Op-Amp for Minimum Distortion
- 20dB Headroom, 30V Bipolar Power Supply
- Blue LED Backlighting
- Quick Disconnect Wire Harness
- S/N Ratio 115dB @1V
- THD:0.05%

PWM-19 4-Band 1/2 DIN Equalizer



- 2 Selectable Balanced Inputs
- Variable Stereo Input Sensitivity
- 4 bands +/- 18dB Parametric Equalizer
- Independent Volume & Fader Control
- Independent Subwoofer Output and Level Control
- Variable Subwoofer Low-Pass Crossover
- 7V MAX Front, Rear, & Subwoofer Outputs
- Low Noise BI-FET Op-Amp for Minimum Distortion
- 20dB Headroom, 30V Bipolar Power Supply
- Selectable Green/Amber Illumination
- Quick Disconnect Wire Harness
- Under Dash Mounting Hardware Included
- S/N Ratio 110dB @5V
- THD:0.05%

PWM-16 4-Band 1/2 DIN Equalizer




- 2 Selectable Balanced Inputs & Front Panel AUX Input
- 4 bands +/- 18dB Parametric Equalizer
- Independent Volume & Fader Control
- Independent Subwoofer Output and Level Control
- Variable Subwoofer Low-Pass Crossover
- 7V MAX Front, Rear, & Subwoofer Outputs
- Blue LED Backlighting
- Quick Disconnect Wire Harness
- S/N Ratio 80dB @5V
- THD:0.05%

Power Acoustik **INGENIX** powered source units use a proprietary engine featuring 700 MHz CPU processor & WIN CE 5.0 operating system. Commonly found in compact netbooks, such lightning fast function processing has not been possible in an aftermarket automotive multimedia system, until now. **INGENIX** programming brings unique feature applications to your fingertips.



Go ahead, take a second look...

The primary menu of the **INGENIX** source units has an appeal that you might expect only from a computer. The LED back light Full HD quality 800x480 screen resolution yields a crisp image. Drag any mode application icon from the slide menu at the bottom of the screen and drop it onto the desktop as a shortcut. Utilize the drop down widget menu for quick settings access. The main menu background and brightness settings can be set to change automatically at night. There's even a scrolling marquee banner displaying your short message.

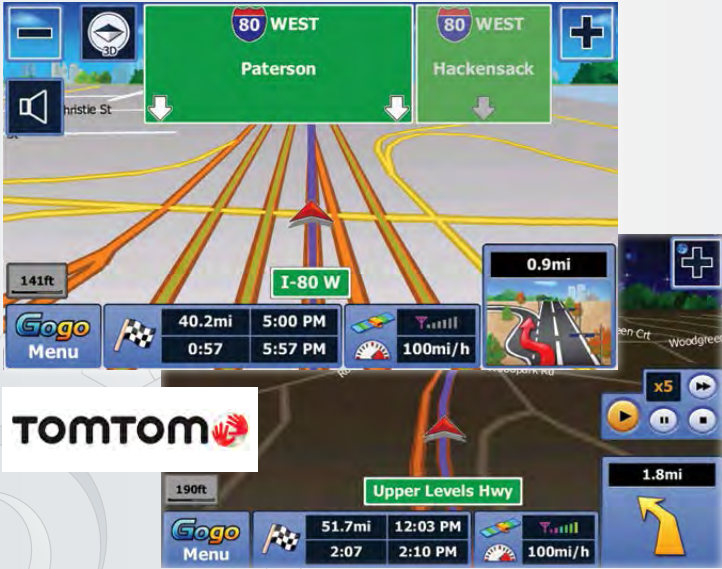


Built-in GPS Navigation

All Ingenix powered source units come standard with GPS turn-by-turn navigation for USA & Canada (other countries available). Set your destination and enjoy text-to-speech directions with lane guidance. Additional features include favorites list, programmable home destination, destination fuel estimates, multi-lingual, multi-gender voices, speed limit warnings, and more. Maps and POI data by TomTom.




Digital Signal Processing

DSP features include a digital 7-band equalizer w/ 9 factory presets & 3 custom presets, real time analyzer, individual source level adjustment, variable subwoofer level control w/ low pass crossover, and sound staging controls.

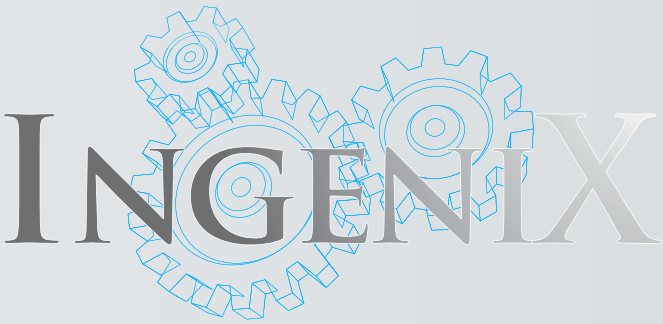


32GB SDHC & USB 2.0 Reader

Playback MP3, WAV, FLAC, & AC3 audio files, or MP4, WMV, DivX, & XviD video files from up to a 32GB SDHC card or USB 2.0 mass storage device. Artwork transfers from enabled device, if available. INGENIX units will read files from a USB powered portable hard drive, up to 250GB capacity.

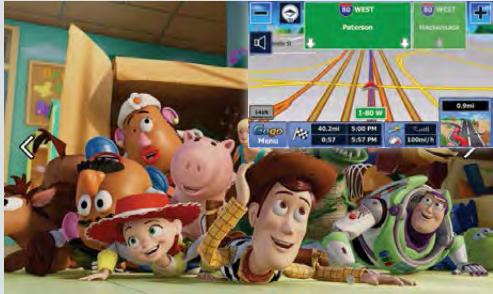

Picture-in-Picture

INGENIX is the first to bring the Picture-in-Picture function into the car. PIP allows uninterrupted video playback while simultaneously viewing the GPS navigation map in real time, as it happens. The picture can be re-sized and positioned to 3 different ratios.

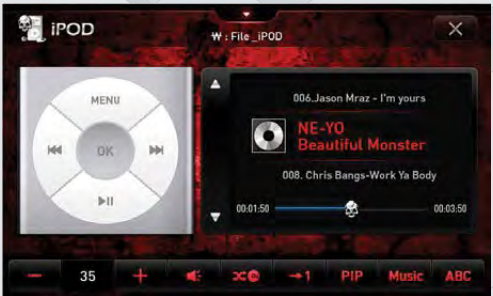


Full iPod Control Integration
(requires IP-5C cable)

Scroll through your iPhone, iPod Touch, Classic, or Nano to find your favorite tracks. Search options include by Album, Artist, Genre, Playlist, or entire track list. Jump through lists by first alpha character scrolling.



Bluetooth V2.1 + EDR Connectivity

Bluetooth V2.1 with Enhanced Data Rate increases data transfer rates to 2.1 Mbit/s. This lightning quick information transfer increases clarity & virtually eliminates unwanted distortion during calls and wireless MP3 audio playback. Most Bluetooth enabled Smartphones will transfer phone book contacts, view recent call logs, and stream MP3 audio tracks.

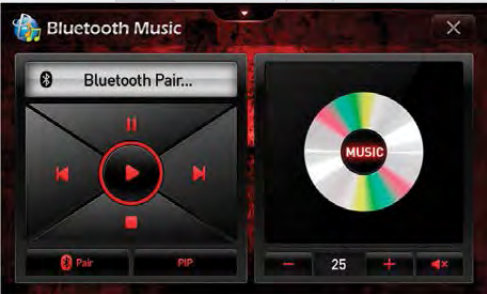

Streaming Bluetooth Music (A2DP)

Pair your Bluetooth enabled cell phone, Smartphone, iPhone, or iPod Touch for wireless MP3 playback. Use the touch screen controls for basic operations.



Multimedia File Manager

Sort, view, play, move, or delete your multimedia & data files. No longer will you need a computer on the go to manage your USB/SD/HDD Mass Storage devices.



Speedometer & Compass

Are larger wheels and tires throwing off your speedometer? Can't figure which direction you're driving? Utilize the GPS based real-time speedometer and directional compass to help out. Even set them as the screen saver for constant viewing.



ADDITIONAL FEATURES

- Dual Zone for Rear Seat or Overhead Entertainment
- Adjustable Video Output Screen Ratio & Image Positioning
- Utility Application w/ Memo Pad, Calculator, Calendar, Car Maintenance, Texas Hold 'em Poker, & World Clock
- 4V Front, Rear & Subwoofer Pre-amp Output
- Front Panel 3.5mm AUX A/V Input
- A/V Input from Auxiliary Source
- Rear View Camera RCA Input w/ Trigger

- Accepts Axxess Steering Wheel Interface
- JPG, BMP, & GIF Photo Browser
- Upload Custom Screen Savers
- Remote Control Sold Separately
- Digital & Analog TV Tuners Available
- NTSC/PAL Video Playback
- 50W x 4 MOSFET Speaker Outputs
- 400NIT Panel Brightness

PNX-761

Double Din INGENIX AVN Source Unit w/ Digital 7" TFT-LCD Touch Screen

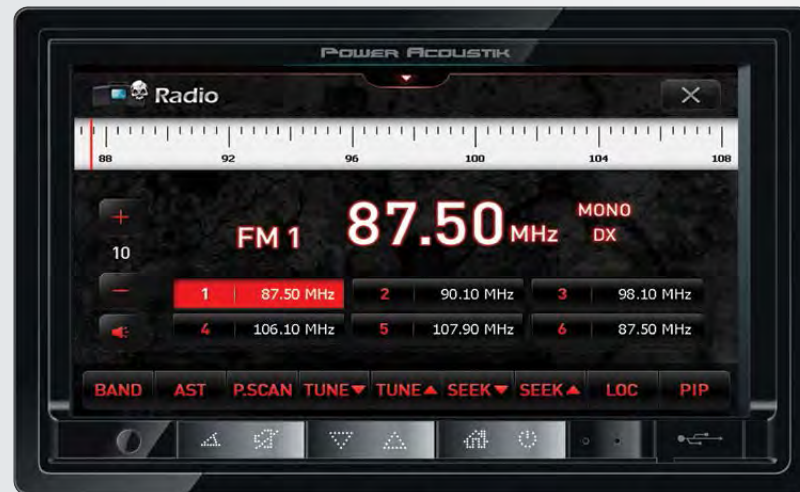
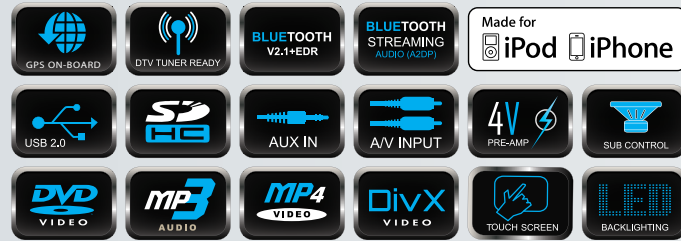


TOMTOM

- Motorized 7" LCD w/ Preset Angle Adjustment
- Complete Ingenix Operating System
- Playback from DVDR/RW or CDR/RW of MP3, MP4, & DivX
- Playback From 32GB SD Card or USB of MP3, MP4, & DivX
- Bluetooth V2.1 EDR Hands Free Calling from Enabled Phone
- A2DP MP3 Audio Playback from Enabled Device
- AUX A/V Input for Personal Media Devices
- ID3 Tag Reading for Track & Artist Information
- Accepts Axxess Steering Wheel Module
- Complete iPod Integration with IP-5C
- Rear View Camera Input w/ Trigger
- Multi-Region FM Frequency Stepping
- 52wx4 MOSFET Speaker Outputs
- 800x480 Widescreen Resolution
- 400NIT LED Backlight Brightness


PNX-721

Single Din INGENIX AVN Source Unit w/ Detachable Digital 7" TFT-LCD Touch Screen

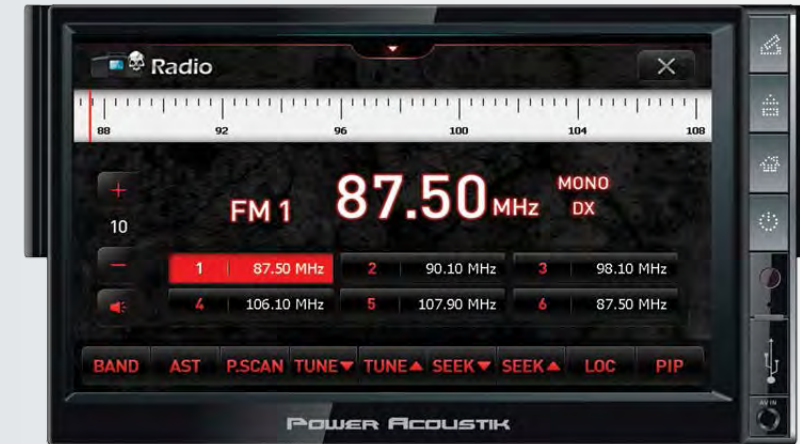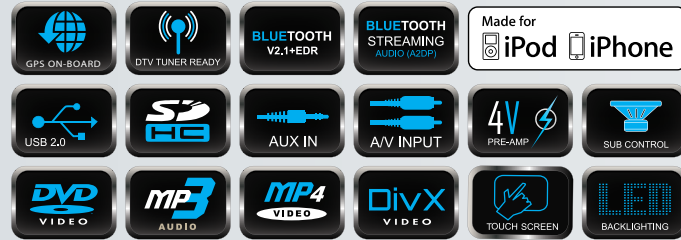

TOMTOM

- Motorized 7" LCD w/ Preset Angle Adjustment
- Detachable Theft Deterrent Faceplate
- Complete Ingenix Operating System
- Playback from DVDR/RW or CDR/RW of MP3, MP4, & DivX
- Playback From 32GB SD Card or USB of MP3, MP4, & DivX
- Bluetooth V2.1 EDR Hands Free Calling from Enabled Phone
- A2DP MP3 Audio Playback from Enabled Device
- AUX A/V Input for Personal Media Devices
- ID3 Tag Reading for Track & Artist Information
- Accepts Axxess Steering Wheel Module
- Complete iPod Integration with IP-5C
- Rear View Camera Input w/ Trigger
- Multi-Region FM Frequency Stepping
- 52wx4 MOSFET Speaker Outputs
- 800x480 Widescreen Resolution
- 400NIT LED Backlight Brightness

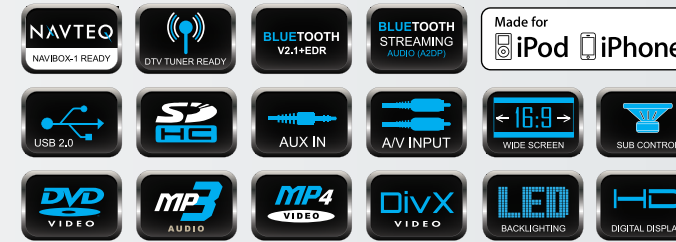

P-81ACRD

2008~2012 Honda Accord EX/LX



Before

After

P-84SNTA11 2011 Hyundai Sonata

P-84SNTA12 2012 Hyundai Sonata



After

Before



TV-AN (analog multi system)

TV-DVB-T

TV-DVB-H

TV-ISDB-T

TV-T-DMB

TV-CMMB

TV Tuner for INGENIX Source Units



REM-5

Remote Control for INGENIX Source Units



OEM Upgrade Systems Include:

- Complete Ingenix Operating System
- Applicable Dash Trim Kit
- 8" LCD Touch Screen 800x480 Resolution
- Navteq Turn-by-Turn GPS Navigation
- Bluetooth V2.1+EDR & A2DP for Streaming MP3
- Full iPod Integration w/ Touch Screen Control
- 32GB USB 2.0 & SDHC Reader Module
- Touch Screen Control of PADVD-490/PADVD-390 DVD Player (not included)
- Retains all OEM information, CD playback, RDS, & Climate Control Functions

P-86OPTM

2011~2012 Kia Optima



After



Before

P-85ELTR

2011~2012 Hyundai Elantra



After



Before

IP-5C

Full Control iPod Cable for INGENIX Source Units

- Full Control & Charging of iPod Classic, iPhone, Nano, & iTouch
- Scroll by Artists, Albums, Genres, or Playlists
- Video Playback from Classic & iTouch
- Compatible with all Ingenix Powered Source Units Only





Media Player

Play audio, video, and picture files through Inteq from a 32GB SD card or USB flash drive. Supports MP3, WAV & FLAC audio files, MP4, DivX, MKV, FLV, & MOV video files, and JPG pictures.




Drag-N-Drop Widget Menu

Place mode application icons on the desktop from the widget menu for quick short-cuts. Any mode or settings menus can drag-n-drop from the widget menu.



Programmable FM/AM Tuner

Inteq's FM/AM receiver allows 18FM station memory and 12AM stations. Recall any favorite station with one simple touch.

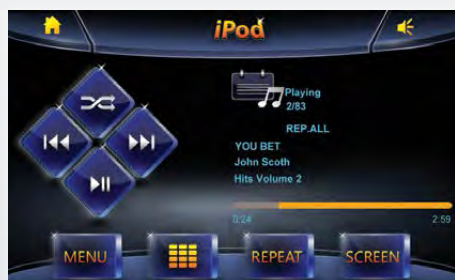

Interface for iPod

Control and charge your iPod or iPhone via Inteq's touch screen for hours of audio & video entertainment. Scroll through and select individual tracks and Playlists, or search by Artist, Album or Genre. Requires IC-3, sold separately.



Ready for GPS Navigation

All Inteq source units are ready for GPS turn-by-turn navigation via NAVIBOX-2, powered by Navteq (sold separately). Set your destination to one of 12 million USA & Canada Points of Interest. Additional features include programmable destinations & selectable languages.



Digital Media Drive

Enjoy your favorite DVD rental, or playback your own MP3/WAV audio tracks and MP4/DivX videos from any DVDR/RW or CDR/RW disc with Inteq's Digital Media Drive.



Hands-Free Calling & Media Playback with Bluetooth V2.1+EDR

Bluetooth V2.1 with Enhanced Data Rate increases data transfer rates to 2.1 Mbit/s. This lightning quick information transfer increases clarity & virtually eliminates unwanted distortion during calls and wireless MP3 audio playback. Most Bluetooth enabled Smartphones will transfer phone book contacts, view recent call logs, and stream MP3 audio tracks.



NAVIBOX-2 Plug-N-Play Turn-By-Turn GPS Navigation Module



- Works with all Inteq Powered Source Units
- Commanded by Source Unit Touch Screen Controls
- Navteq USA & Canada Mapping w/ 12 Million POI Database
- Windows CE 5.0 Operating System
- 500MHz Atlas Processor for Immediate Calculation
- Navigate to Destinations by Address, POI Search, or Favorites List
- Programmable Home and Office Destinations
- Choice of Quickest or Shortest Route
- Remaining Time & Distance to Location Calculation
- Metric or USA Units of Measure
- Text-To-Speech for Most Major Highways
- Multi-Language & Male, Female, Southern & Urban Accents
- 2D & 3D Visual Configurations
- Automatic Day & Night Illumination
- Dimensions: 4.1" x 4.2" x 1"

DTV-3 Direct Control DTV Tuner




- Touch Screen Control from All Inteq Powered Source Units
- Windshield Mount Antenna Included
- Full DTV-MH 57-803MHz Receiving Frequencies
- Electronic Programming Guide
- Favorite Channels Programming
- CCD Closed Captions Optional
- OSD Language Options: English, Spanish, & French
- 4:3 or 16:9 Aspect Ratio
- SDTV 720P Video Signal

KS-1 Desktop Media Player for Select Inteq Models



KS-1 is a desktop media player dock for select Inteq source units. Your Inteq source unit faceplate docks with KS-1, activating the SD & USB playback functions. Sound is produced by built-in rear panel speakers or via earphone output, while videos are displayed on-screen. A built-in kickstand with adjustable positioning allows for easy angled viewing. AC power adapter included.


IC-3 Full Function iPod Integration Cable

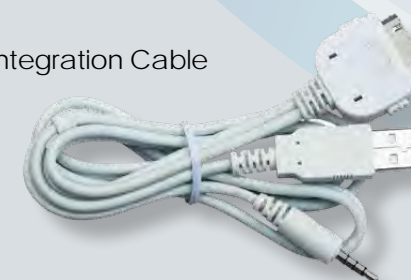

- Full Control & Charging of all Generation
- iPod Classic, Nano, & iTouch
- Scroll by Artists, Albums, Genres, or Playlists
- Video Playback from Classic & iTouch
- Compatible with All Inteq Powered Source Units Only

PD-769NB

Double DIN Inteq Multimedia Source Unit w/ Detachable 7" LCD Touch Screen

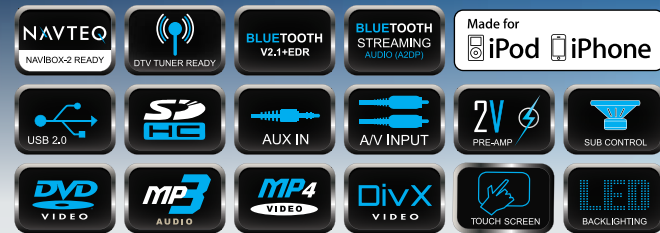

Additional Features


- Detachable Motorized 2-DIN 7" LCD
- Playback from DVDR/RW or CDR/RW of MP3, MP4, & DivX
- Playback From 32GB SD Card or USB of MP3, MP4, & DivX
- Bluetooth V2.0 Hands Free Calling from Enabled Phone
- A2DP MP3 Audio Playback from Enabled Device
- AUX A/V Input for Personal Media Devices
- ID3 Tag Reading for Track & Artist Information
- Accepts Axxess Steering Wheel Module



- Complete iPod Integration with IC-3
- Rear View Camera Input w/ Trigger
- Multi-Region FM Frequency Stepping
- 52wx4 MOSFET Speaker Outputs
- 800x480 Widescreen Resolution
- 400NIT LED Backlight Brightness

PD-622NB

Double DIN Inteq Multimedia Source Unit w/ 6.2" LCD Touch Screen

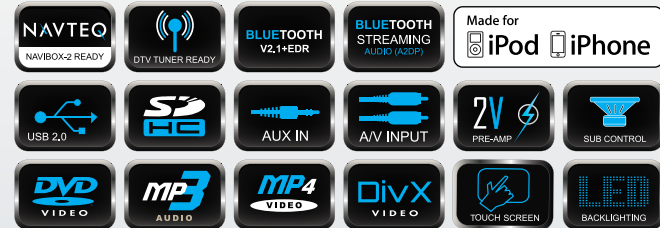

Additional Features

- Playback from DVDR/RW or CDR/RW of MP3, MP4, & DivX
- Playback From 32GB SD Card or USB of MP3, MP4, & DivX
- Bluetooth V2.0 Hands Free Calling from Enabled Phone
- A2DP MP3 Audio Playback from Enabled Device
- AUX A/V Input for Personal Media Devices
- ID3 Tag Reading for Track & Artist Information
- Accepts Axxess Steering Wheel Module
- Complete iPod Integration with IC-3
- Rear View Camera Input w/ Trigger




- Multi-Region FM Frequency Stepping
- 52wx4 MOSFET Speaker Outputs
- 800x480 Widescreen Resolution
- 400NIT LED Backlight Brightness

PD-740NB

PD-740NBT (w/ Analog TV Tuner)

Single DIN Inteq Multimedia Source Unit w/ Flip-up 7" LCD

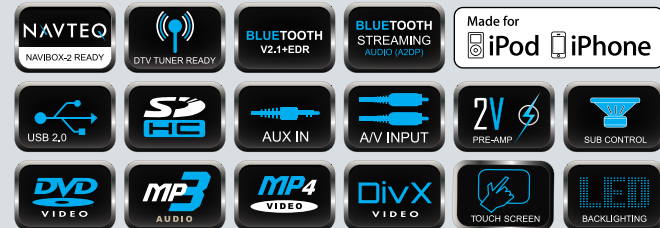

Additional Features

- Motorized Telescoping & Angle Adjustment
- Detachable Theft Deterrent Front Panel
- Playback from DVDR/RW or CDR/RW of MP3, MP4, & DivX
- Playback From 32GB SD Card or USB of MP3, MP4, & DivX
- Bluetooth V2.0 Hands Free Calling from Enabled Phone
- A2DP MP3 Audio Playback from Enabled Device
- AUX A/V Input for Personal Media Devices
- ID3 Tag Reading for Track & Artist Information
- Accepts Axxess Steering Wheel Module
- Complete iPod Integration with IC-3
- Rear View Camera Input w/ Trigger
- Multi-Region FM Frequency Stepping




- 52wx4 MOSFET Speaker Outputs
- 800x480 Widescreen Resolution
- 400NIT LED Backlight Brightness

PD-931NB

PD-931NBT (w/ Analog TV Tuner)

Single DIN Inteq Multimedia Source Unit w/ Detachable 9.3" LCD Touch Screen

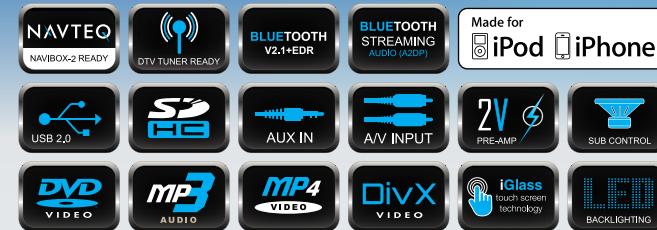

Additional Features

- Detachable Motorized Faceplate w/ Angle Adjustment
- iGlass Touch Screen Technology Panel
- Accepts Optional KS-1 Desktop Media Player
- Playback from DVDR/RW or CDR/RW of MP3, MP4, & DivX
- Playback From 32GB SD Card or USB of MP3, MP4, & DivX
- Bluetooth V2.0 Hands Free Calling from Enabled Phone
- A2DP MP3 Audio Playback from Enabled Device
- AUX A/V Input for Personal Media Devices
- ID3 Tag Reading for Track & Artist Information
- Angled AUX-In & USB Adapter Included
- Accepts Axxess Steering Wheel Module
- Complete iPod Integration with IC-3
- Rear View Camera Input w/ Trigger
- Extended Sleeve & Trim Ring Included
- 52wx4 MOSFET Speaker Outputs
- Multi-Region FM Frequency Stepping
- Padded Carry Case Included
- 800x480 Widescreen Resolution
- 400NIT LED Backlight Brightness




Optional KS-1 Desktop Media Player

PD-718NB

PD-718NBT (w/ Analog TV Tuner)

Single DIN Inteq Multimedia Source Unit w/ Detachable 7" LCD Touch Screen

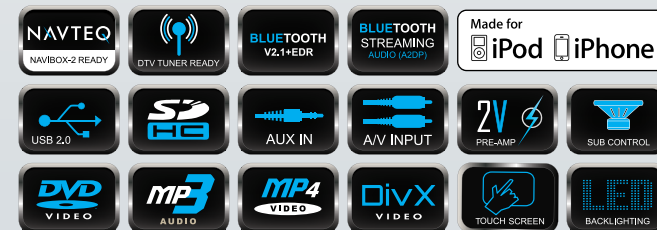

Additional Features

- Detachable Motorized Faceplate w/ Angle Adjustment
- Accepts Optional KS-1 Desktop Media Player
- Playback from DVDR/RW or CDR/RW of MP3, MP4, & DivX
- Playback From 32GB SD Card or USB of MP3, MP4, & DivX
- Bluetooth V2.0 Hands Free Calling from Enabled Phone
- A2DP MP3 Audio Playback from Enabled Device
- AUX A/V Input for Personal Media Devices
- ID3 Tag Reading for Track & Artist Information
- Accepts Axxess Steering Wheel Module
- Complete iPod Integration with IC-3
- Rear View Camera Input w/ Trigger
- Extended Sleeve & Trim Ring Included
- 52wx4 MOSFET Speaker Outputs
- Multi-Region FM Frequency Stepping
- Padded Carry Case Included
- 800x480 Widescreen Resolution
- 400NIT LED Backlight Brightness



Optional KS-1 Desktop Media Player

PD-650

PD-650B (w/ Bluetooth V2.0)

Double DIN Multimedia Source Unit w/ Motorized 6.5" LCD Touch Screen



Additional Features

- Motorized Angle Adjustment
- Playback from DVDR/RW or CDR/RW of MP3, MP4, & DivX
- Playback From 32GB SD Card or USB of MP3, MP4, & DivX
- Bluetooth V2.0 Hands Free Calling from Enabled Phone
- A2DP MP3 Audio Playback from Enabled Device
- AUX A/V Input for Personal Media Devices
- ID3 Tag Reading for Track & Artist Information
- Rear View Camera Input w/ Trigger
- Fixed 80Hz Subwoofer Output
- 52w x 4 MOSFET Speaker Outputs
- Multi-Region FM Frequency Stepping
- 480x272 Widescreen Resolution
- 500 NIT LED Brightness



PTID-8920

PTID-8920B (w/ Bluetooth V2.0)

PTID-8920T (w/ Analog TV Tuner)

PTID-8920BT (w/ Bluetooth V2.0 & Analog TV Tuner)

Single Din Multimedia Source Unit w/ 7" Flip-Up LCD Touch Screen



Additional Features

- Motorized Angle Adjustment
- Detachable Theft Deterrent Front Panel
- Playback from DVDR/RW or CDR/RW of MP3, MP4, & DivX
- Playback From 32GB SD Card or USB of MP3, MP4, & DivX
- Bluetooth V2.0 Hands Free Calling from Enabled Phone
- A2DP MP3 Audio Playback from Enabled Device
- AUX A/V Input for Personal Media Devices
- ID3 Tag Reading for Track & Artist Information
- Dual Zone for Rear Seat or Overhead Entertainment
- Programable Open or Closed Positioning After Use
- Rear View Camera Input w/ Trigger
- 52w x 4 MOSFET Speaker Outputs
- Multi-Region FM Frequency Stepping
- 800x480 Widescreen Resolution
- 400 NIT LED Brightness



PD-712

PD-712B (w/ Bluetooth V2.0)

PD-712T (w/ Analog TV Tuner)

PD-712BT (w/ Bluetooth V2.0 & Analog TV Tuner)

Single Din Multimedia Source Unit w/ Motorized Detachable 7" LCD Touch Screen



Additional Features

- Motorized Angle Adjustment
- Theft Deterrent Detachable Faceplate
- Playback from DVDR/RW or CDR/RW of MP3, MP4, & DivX
- Playback From 32GB SD Card or USB of MP3, MP4, & DivX
- Bluetooth V2.0 Hands Free Calling from Enabled Phone
- A2DP MP3 Audio Playback from Enabled Device
- AUX A/V Input for Personal Media Devices
- ID3 Tag Reading for Track & Artist Information
- Rear View Camera Input w/ Trigger
- Extended Sleeve & Trim Ring Included
- Fixed 80Hz Subwoofer Output
- 52w x 4 MOSFET Speaker Outputs
- Multi-Region FM Frequency Stepping
- 800x480 Widescreen Resolution
- 400 NIT LED Brightness



PD-710

PD-710B (w/ Bluetooth V2.0)

PD-710T (w/ Analog TV Tuner)

PD-710BT (w/ Bluetooth V2.0 & Analog TV Tuner)

Single Din Multimedia Source Unit w/ Detachable 7" LCD Touch Screen



Additional Features

- Theft Deterrent Detachable Faceplate
- Playback from DVDR/RW or CDR/RW of MP3, MP4, & DivX
- Playback From 32GB SD Card or USB of MP3, MP4, & DivX
- Bluetooth V2.0 Hands Free Calling from Enabled Phone
- A2DP MP3 Audio Playback from Enabled Device
- AUX A/V Input for Personal Media Devices
- ID3 Tag Reading for Track & Artist Information
- Rear View Camera Input w/ Trigger
- Extended Sleeve & Trim Ring Included
- Fixed 80Hz Subwoofer Output
- 52w x 4 MOSFET Speaker Outputs
- Multi-Region FM Frequency Stepping
- 800x480 Widescreen Resolution
- 400 NIT LED Brightness



PD-535
 PD-535T (w/ Analog TV Tuner)
 Single Din Multimedia Source Unit w/ Motorized Detachable 5.3" LCD Touch Screen



Additional Features

- Motorized Angle Adjustment
- Theft Deterrent Detachable Faceplate
- Playback from DVDR/RW or CDR/RW of MP3, MP4, & DivX
- Playback From 32GB SD Card or USB of MP3, MP4, & DivX
- AUX A/V Input for Personal Media Devices
- ID3 Tag Reading for Track & Artist Information
- Fixed 80Hz Subwoofer Output
- 52w x 4 MOSFET Speaker Outputs
- Multi-Region FM Frequency Stepping
- 480x272 Widescreen Resolution
- 400 NIT LED Brightness



PD-450
 PD-450T (w/ Analog TV Tuner)
 Single DIN A/V Source Unit w/ Detachable 4.5" LCD Touch Screen



Additional Features

- Theft Deterrent Detachable Faceplate
- Playback from DVDR/RW or CDR/RW of MP3, MP4, & DivX
- Playback From 32GB SD Card or USB of MP3, MP4, & DivX
- AUX A/V Input for Personal Media Devices
- ID3 Tag Reading for Track & Artist Information
- Rear View Camera Input w/ Trigger
- Fixed 80Hz Subwoofer Output
- 52w x 4 MOSFET Speaker Outputs
- Multi-Region FM Frequency Stepping
- 480x243 Widescreen Resolution
- 400 NIT LED Brightness



PD-344
 PD-344T (w/ Analog TV Tuner)
 Single DIN A/V Source Unit w/ Detachable 3.4" LCD Screen

Additional Features

- Theft Deterrent Detachable Faceplate
- Playback from DVDR/RW or CDR/RW of MP3, MP4, & DivX
- Playback From 32GB SD Card or USB of MP3, MP4, & DivX
- MP3 ID3 Tag Reading of MP3 Files
- AUX Audio Input for Personal Media Devices
- Audio & Video RCA Outputs
- Fixed Subwoofer RCA Output
- 5,200w x 4 MOSFET Speaker Outputs
- Multi-Region FM Frequency Stepping
- 720x420 Widescreen Resolution
- 400 NIT LED Brightness



AFTERMARKET OEM INTEGRATION

OEM in-vehicle technologies have advanced significantly in recent years. As more vehicles land on showroom floors with advanced network systems, the ability to integrate aftermarket source units has become essential. Power Acoustik is excited to partner with Fahrenheit and introduce its series of aftermarket OEM integration modules and universal steering wheel control interface. Communication, safety, and convenience features that otherwise would be lost are retained while enjoying added aftermarket entertainment. All modules are pre-fitted with Power Acoustik source unit and vehicle make/model specific wire harnesses, creating plug-n-play installation for all Ingenix, Inteq, & multimedia receivers. Visit PowerAcoustik.com for complete vehicle application guides.



- | | |
|---------|--------------------------------------------------------------------------------------------|
| DRC-1 | Universal steering wheel control interface for select GM, Chrysler, Ford & Toyota vehicles |
| GM-2 | Select 2000+ General Motors vehicles w/ Class 2 data system |
| GM-2OS | Select 2000+ General Motors vehicles w/ Class 2 data system & OnStar |
| GM-11 | Select 2005+ General Motors vehicles w/ LAN 11-bit data system |
| GM-11OS | Select 2005+ General Motors vehicles w/ LAN 11-bit data system & OnStar |
| GM-29 | Select 2005+ General Motors vehicles w/ LAN 29-bit data system |
| GM-29OS | Select 2006+ General Motors vehicles w/ LAN 29-bit data system & OnStar |
| CH-1 | Select 2005+ Chrysler, Dodge, & Jeep vehicles w/ premium entertainment system |
| TOY-1 | Select 2003+ Toyota & Lexus vehicles w/ premium entertainment system |
| FRD-1 | Select 2004+ Ford, Lincoln, & Mercury vehicles w/ CAN Bus system |

DIGITAL MEDIA RECEIVERS



Media Player

Play audio, video, and picture files from a 32GB SD card or USB flash drive. Supports MP3 & WAV audio files; MP4, DivX, & AVI video files. Also features a .JPG picture viewer.



Programmable FM/AM Tuner

The FM/AM receiver of all DMRs allow 18FM station memory and 12AM stations. Recall you're favorite station with a simple press of a button or knob turn.



Digital Signal Processing

DSP features include a digital 2-band equalizer w/ 7 factory presets, a custom preset, and sound staging controls. Each DMR offers Low Level RCA audio outputs.

PDR-654

Double DIN Digital Media Receiver w/ 6.5" LCD Touch Screen

- Playback from up to 32GB SD/MMC Card or USB Flash Drive
- 720p HD Video Playback of MP4, DIVX, AVI & More
- Audio Playback of MP3, AAC, AC3, & WMA
- Picture Viewer of JPEG, PNG & GIF
- ID3 Tag Reading for Track & Artist Information
- AUX Audio Input for Personal Media Devices
- 18 FM / 12 AM Station Memory
- 52w x 4 MOSFET Powered Speaker Level Outputs
- 1 Set of Low-Level RCA Audio Outputs
- Custom Audio Staging & EQ Controls
- Multi-Region FM/AM Frequency Stepping
- 400x240 HD Resolution w/ 400cd/m2 Brightness
- 4" Mounting Depth



PDR-780

PDR-780T (w/ Analog TV Tuner)

Single DIN Digital Media Receiver w/ Flip-up 7" LCD Touch Screen

- Motorized Telescoping & Angle Adjustment
- Detachable Theft Deterrent Front Panel
- Playback from up to 32GB SD/MMC Card or USB Flash Drive
- 720p HD Video Playback of MP4, DIVX, AVI & More
- Audio Playback of MP3, AAC, AC3, & WMA
- Picture Viewer of JPEG, PNG & GIF
- ID3 Tag Reading for Track & Artist Information
- AUX Audio Input for Personal Media Devices
- 18 FM / 12 AM Station Memory
- 52w x 4 MOSFET Powered Speaker Level Outputs
- 1 Set of Low-Level RCA Audio Outputs
- Custom Audio Staging & EQ Controls
- Multi-Region FM/AM Frequency Stepping
- 800x480 HD Resolution w/ 400cd/m2 Brightness
- 4" Mounting Depth



PDR-760

PDR-760T (w/ Analog TV Tuner)

Single DIN Digital Media Receiver w/ Detachable 7" LCD Touch Screen

- Detachable Motorized Faceplate w/ Angle Adjustment
- Playback from up to 32GB SD/MMC Card or USB Flash Drive
- 720p HD Video Playback of MP4, DIVX, AVI & More
- Audio Playback of MP3, AAC, AC3, & WMA
- Picture Viewer of JPEG, PNG & GIF
- ID3 Tag Reading for Track & Artist Information
- AUX Audio Input for Personal Media Devices
- 18 FM / 12 AM Station Memory
- 52w x 4 MOSFET Powered Speaker Level Outputs
- 1 Set of Low-Level RCA Audio Outputs
- Custom Audio Staging & EQ Controls
- Multi-Region FM/AM Frequency Stepping
- 800x480 HD Resolution w/ 400cd/m2 Brightness
- 4" Mounting Depth



PDR-340

PDR-340T (w/ Analog TV Tuner)

Single DIN Digital Media Receiver w/ Detachable 3.4" LCD Screen

- Theft Deterrent Detachable Flip-Down Front Faceplate
- Playback from up to 32GB SD/MMC Card or USB Flash Drive
- 720p HD Video Playback of MP4, DIVX, AVI & More
- Audio Playback of MP3, AAC, AC3, & WMA
- Picture Viewer of JPEG, PNG & GIF
- ID3 Tag Reading for Track & Artist Information
- AUX Audio Input for Personal Media Devices
- 18 FM / 12 AM Station Memory
- 52w x 4 MOSFET Powered Speaker Level Outputs
- 1 Set of Low-Level RCA Audio Outputs
- Custom Audio Staging & EQ Controls
- Multi-Region FM/AM Frequency Stepping
- 720x420 HD Resolution w/ 400cd/m2 Brightness
- 4" Mounting Depth



PCD-40
Single DIN CD/MP3 Source Unit w/ 32GB SD/USB Playback



- Detachable Theft Deterrent Faceplate
- Playback from CDR/CDRW & 32GB SD & USB Flash Drive of MP3, WAV, WMA
- Front Panel 3.5mm AUX Audio Input
- 2-Channel 2V Pre-Amp RCA Audio Outputs
- 52wx4 MOSFET Powered Speaker Level Outputs
- 18FM/12AM Station Memory
- Custom & Preset EQ Settings
- Audio Staging Controls
- Remote Control Included



PL-10A
Single DIN Mechless Source Unit w/ AM/FM & SD/USB Playback



- Detachable Theft Deterrent Front Panel Faceplate
- Playback from 32GB SD & USB of MP3, WAV, WMA
- Front Panel 3.5mm AUX Audio Input
- 2-Channel 2V Pre-Amp RCA Audio Outputs
- 52wx4 MOSFET Powered Speaker Level Outputs
- 18FM/12AM Station Memory
- Custom & Preset EQ Settings
- Audio Staging Controls
- Remote Control Included



PL-15PMP
Single DIN Mechless Source Unit w/ AM/FM & SD/USB Playback Detachable Media Player



- Detachable Theft Deterrent Front Panel Faceplate
- Detachable Media Player for AM/FM, MMC/USB Playback
- Built-in Rechargeable Battery by mini-USB
- Earbud Headphones Included
- Playback from 32GB SD or USB of MP3, WAV, WMA
- ID3 Tag Reading for Track & Artist Information
- Front Panel 3.5mm AUX Audio Input
- 2-Channel 2V Pre-Amp RCA Audio Outputs
- 52x4 MOSFET Powered Speaker Level Outputs
- 18FM/12AM Station Memory
- Custom & Preset EQ Settings
- Audio Staging Controls
- Remote Control Included



PADVD-390
PADVD-390T (w/ Analog TV Tuner)
Single DIN DVD Player w/32GB SD/USB Playback



- Additional Features**
- Playback from DVDR/RW or CDR/RW of MP3, MP4, & DivX
 - Playback From 32GB SD Card or USB of MP3, MP4, & DivX
 - AUX A/V Input for Game Console or Personal Media Devices
 - In-Dash, Floor, & Vertical Mounting Brackets Included
 - DIN Size Trim Ring For In-Dash Mounting Included
 - Flash Memory for Last Position Recall



- Remote Control & IR Repeater Included
- OSD On Screen Display
- Digital Anti-shock
- A/V Pre-amp Outputs, 2V
- Dimensions: 6.4" x 6.2" x 2"

PADVD-490
Half-DIN DVD Player w/ 32GB SD/USB Playback



- Additional Features**
- Playback from DVDR/RW or CDR/RW of MP3, MP4, & DivX
 - Playback From 32GB SD Card or USB of MP3, MP4, & DivX
 - AUX A/V Input for game Console or Personal Media Devices
 - Floor & Vertical Mounting Brackets Included
 - Flash Memory for Last Position Recall



- Remote Control & IR Repeater Included
- OSD On Screen Display
- Digital Anti-shock
- A/V Pre-amp Outputs, 2V
- Dimensions: 6.4" x 6.2" x 1"

DMP-1080
Univesal 1080p Digital Media Player

- Playback of 1080p HD Digital Media Files
- 32GB SD/MMC & USB Playback of MP4, AVI, & DivX
- HDMI Input from Auxiliary HD Devices
- 2 Audio / Video RCA Outputs to External Devices
- USB Port for Mobile Device Charging
- Remote Control & IR Repeater Included



OVERHEAD DVD SOLUTIONS

PMD-156CM

Ceiling Mount DVD Entertainment System w/ 15.6" LCD



- Car-Spec DVS DVD Drive for Extreme Temperature Exposure
- Playback from DVDR/RW of 720p MP4 & DivX
- Playback from 32GB SD Card or USB of 720p MP4, & DivX
- Flash Memory for Last Position Recall
- Single Channel Wireless IR Transmitter (use HP-10S, HP-11S)
- FM Stereo Transmitter for OEM Integration
- A/V Input for Auxiliary Sources
- A/V Output for Multiple Component Integration
- Triggered Bright White LED Dome Light
- NTSC / PAL Auto Selection
- 1,366x768 16:9 Widescreen Resolution
- 400 NIT Screen Brightness
- Dimensions: 17.5" w x 13" d x 2" h



PMD-121CMX

Ceiling Mount DVD Entertainment System w/ 12.1" LCD



- Interchangeable Color Skins (beige, black, grey)
- Color Matched Trim Rings for Sculptured Ceilings Included
- Car-Spec DVS DVD Drive for Extreme Temperature Exposure
- Playback from DVDR/RW of 720p MP4 & DivX
- Playback from 32GB SD Card or USB of 720p MP4, & DivX
- Flash Memory for Last Position Recall
- Single Channel Wireless IR Transmitter (use HP-10S, HP-11S)
- FM Stereo Transmitter for OEM Integration
- A/V Inputs for Auxiliary Sources
- Rear Panel RCA A/V Input for Game Console
- A/V Output for Multiple Component Integration
- Rear Panel Play/Pause Control
- Triggered Bright White LED Dome Light
- NTSC / PAL Auto Selection
- 800 x 600 4:3 Fullscreen Resolution
- 400 NIT Screen Brightness
- Dimensions: 15" w x 13.7" d x 2.5" h



PMD-112CMX

Ceiling Mount DVD Entertainment System w/ 11.2" LCD



- Interchangeable Color Skins (beige, black, grey)
- Color Matched Trim Rings for Sculptured Ceilings Included
- 90°/90° Swivel Screen for Angled Viewing
- Car-Spec DVS DVD Drive for Extreme Temperature Exposure
- Playback from DVDR/RW of 720p MP4 & DivX
- Playback from 32GB SD Card or USB of 720p MP4, & DivX
- Flash Memory for Last Position Recall
- Single Channel Wireless IR Transmitter (use HP-10S, HP-11S)
- FM Stereo Transmitter for OEM Integration
- A/V Input for Auxiliary Sources
- Rear Panel RCA A/V Input for Game Console
- A/V Output for Multiple Component Integration
- Rear Panel Play/Pause Control
- Triggered Bright White LED Dome Light
- NTSC / PAL Auto Selection
- 800 x 480 16:9 Widescreen Resolution
- 400 NIT Screen Brightness
- Dimensions: 14.5" w x 12.5" d x 2.5" h



PMD-115CM

Ceiling Mount DVD Entertainment System w/ 11.2" LCD



- Interchangeable Color Skins (beige, black, grey)
- Car-Spec DVS DVD Drive for Extreme Temperature Exposure
- Playback from DVDR/RW of 720p MP4 & DivX
- Playback from 32GB SD Card or USB of 720p MP4, & DivX
- Flash Memory for Last Position Recall
- Single Channel Wireless IR Transmitter (use HP-10S, HP-11S)
- FM Stereo Transmitter for OEM Integration
- A/V Inputs for Auxiliary Sources
- A/V Output for Multiple Component Integration
- Triggered Bright White LED Dome Light
- NTSC / PAL Auto Selection
- 800x480 16:9 Widescreen Resolution
- 400 NIT Screen Brightness
- Dimensions: 12.75" w x 11.5" d x 2.5" h



PMD-105CM

Ceiling Mount DVD Entertainment System w/ 10.2" LCD



- Interchangeable Color Skins (beige, black, grey)
- Car-Spec DVS DVD Drive for Extreme Temperature Exposure
- Playback from DVDR/RW of 720p MP4 & DivX
- Playback from 32GB SD Card or USB of 720p MP4, & DivX
- Flash Memory for Last Position Recall
- Single Channel Wireless IR Transmitter (use HP-10S, HP-11S)
- FM Stereo Transmitter for OEM Integration
- A/V Output for Multiple Component Integration
- A/V Inputs for Auxiliary Sources
- Triggered Bright White LED Dome Light
- NTSC / PAL Auto Selection
- 1,024x600 16:9 Widescreen Resolution
- 400 NIT Screen Brightness
- Dimensions: 12.75" w x 11.5" d x 2.5" h



PMD-104X

Ceiling Mount DVD Entertainment System w/ 10.3" LCD



- 10.3" High Resolution LCD Screen
- 1,024 x 600 16:9 Widescreen Resolution
- Interchangeable Color Skins (beige, black, grey)
- Automotive-Spec DVD Transport for Extreme Conditions
- Playback from DVDR/RW of 720p MP4 & DivX
- Playback from 32GB SD Card or USB of 720p MP4, & DivX
- Single Channel Wireless IR Transmitter (use HP-10S, HP-11S)
- FM Stereo Transmitter for OEM Integration
- A/V RCA Inputs for Auxiliary Sources
- Rear Panel RCA A/V Input for Game Console
- Triggered Bright White LED Dome Light
- NTSC / PAL Auto Selection
- 400 NIT Screen Brightness
- Dimensions: 13" w x 11" d x 2.5" h



PMD-102X Ceiling Mount DVD Entertainment System w/ 10.2" LCD



Additional Features

- Interchangeable Color Skins (beige, black, grey)
- Playback from DVDR/RW of 720p MP4 & DivX
- Playback from 32GB SD Card or USB of 720p MP4, & DivX
- Flash Memory for Last Position Recall
- Single Channel Wireless IR Transmitter (use HP-10S, HP-11S)
- FM Stereo Transmitter for OEM Integration
- A/V Output for Multiple Component Integration
- A/V Inputs for Auxiliary Sources
- Rear Panel RCA A/V Input for Game Console
- Rear Panel Play/Pause Control
- Triggered Bright White LED Dome Light
- NTSC / PAL Auto Selection
- 1,024x600 16:9 Widescreen Resolution
- 400 NIT Screen Brightness
- Dimensions: 11.5" w x 11" d x 2.5" h



PMD-90CM Ceiling Mount DVD Entertainment System w/ 9" LCD



Additional Features

- Interchangeable Color Skins (beige, black, grey)
- Color Matched Trim Ring for Sculptured Ceiling Included
- 90°/90° Swivel Screen for Angled Viewing
- Car-Spec DVS DVD Drive for Extreme Temperature Exposure
- Playback from DVDR/RW of 720p MP4 & DivX
- Playback from 32GB SD Card or USB of 720p MP4, & DivX
- Flash Memory for Last Position Recall
- Single Channel Wireless IR Transmitter (use HP-10S, HP-11S)
- FM Stereo Transmitter for OEM Integration
- A/V Input for Auxiliary Sources
- Rear Panel RCA A/V Input for Game Console
- A/V Output for Multiple Component Integration
- Triggered Bright White LED Dome Light
- Rear Panel Play/Pause Control
- NTSC / PAL Auto Selection
- 800 x 480 16:9 Widescreen Resolution
- 400 NIT Screen Brightness
- Dimensions: 11" w x 9.75" d x 2.5" h



OVERHEAD LCD MONITORS

PT-151CM Ceiling Mount 15.2" LCD Monitor



- Low Reflection TFT-LCD Monitor
- 2 RCA A/V Inputs for Auxiliary Source
- Single Channel Wireless IR Transmitter (use HP-10S, HP-11S)
- NTSC / PAL Auto Selection
- 1,024 x 768 4:3 Fullscreen Resolution
- 400 NIT Screen Brightness
- Dimensions: 15.75" w x 14.75" d x 2" h



PT-120CM Ceiling Mount 12.1" LCD Monitor



- Interchangeable Color Skins (beige, black, grey)
- Color Matched Trim Rings for Sculptured Ceilings Included
- Single Channel Wireless IR Transmitter (use HP-10S, HP-11S)
- A/V Input for Auxiliary Sources
- Triggered Bright White LED Dome Light
- NTSC / PAL Auto Selection
- 800 x 600 4:3 Fullscreen Resolution
- 400 NIT Screen Brightness
- Dimensions: 15" w x 13.7" d x 2.5" h



PT-110CM Ceiling Mount 11.2" LCD Monitor



- Interchangeable Color Skins (beige, black, grey)
- Color Matched Trim Rings for Sculptured Ceilings Included
- 90°/90° Swivel Screen for Angled Viewing
- Single Channel Wireless IR Transmitter (use HP-10S, HP-11S)
- A/V Input for Auxiliary Sources
- Triggered Bright White LED Dome Light
- NTSC / PAL Auto Selection
- 800 x 480 16:9 Widescreen Resolution
- 400 NIT Screen Brightness
- Dimensions: 14.5" w x 12.5" d x 2.5" h



PT-91CM Ceiling Mount 9" LCD Monitor



- Interchangeable Color Skins (beige, black, grey)
- Color Matched Trim Rings for Sculptured Ceilings Included
- 90°/90° Swivel Screen for Angled Viewing
- Single Channel Wireless IR Transmitter (use HP-10S, HP-11S)
- A/V Input for Auxiliary Sources
- Triggered Bright White LED Dome Light
- NTSC / PAL Auto Selection
- 800 x 480 16:9 Widescreen Resolution
- 400 NIT Screen Brightness
- Dimensions: 11" w x 9.75" d x 2.5" h



UNIVERSAL REPLACEMENT HEADREST

PHDM-103

1080p Digital Media Headrest Preloaded w/ 10.3" LCD & **HDMI MHL Input**



- 10.3" High Resolution LCD Screen
- 1,024 x 600 16:9 Widescreen Resolution
- Forward / Backwards Tilting Headrest
- 3 Changeable Color Skins Included (grey, beige, black)
- 32GB USB Readers for 1080p MP4, AVI, & DivX Playback
- Dual Channel Wireless IR Transmitter (use HP-12S)
- FM Stereo Transmitter for OEM Integration
- HDMI Input from Auxiliary HD Devices
- Accepts Fahrenheit MHL Interface Cables
- 2 RCA A/V Input for Auxiliary Source or Opposite Headrest
- RCA Audio Outputs
- Hardwired Headphone Output
- Full Function Remote Control Included
- 3/8" Locking Pole w/ 1/2" & 9/16" Adapters
- 4.75" ~ 8.25" Pole Width Adjustment
- NTSC / PAL Auto Selection
- Dimensions: 11.75" w x 8.25" h x 4.75" d



GRIP-H Headrest Mounting Bracket for Mobile Devices



MHL / HDMI Interface Cables

HDM-i4 ~ iPhone4, iPhone4S & iPad2

HDM-i5 ~ iPhone5 & iPad3

HDM-A2 ~ Galaxy 2 & Select Android Device

HDM-A3 ~ Galaxy 3 & Select Android Devices

5ft interface cable unlocks 1080p video and audio playback from MHL enabled mobile devices. Each interface cable features the appropriate micro connector for your mobile device and full size HDMI. Fahrenheit HDMI interface cables also charge your mobile device. Available for select iOS and Android devices. Visit poweracoustik.com for complete compatibility listings.

HDVD-9GR - Grey

HDVD-9GRDK - Dark Grey

HDVD-9BG - Beige

HDVD-9BK - Black

1 Pair Universal Replacement Headrests Pre-Loaded w/ 8.8" LCD Touch Screen, DVD Player, & Headphones



- Side Slot-Loading DVD Player In Each Headrest
- Playback from DVDR/RW of 720p MP4 & DivX
- Playback from 32GB SD Card or USB of 720p MP4, & DivX
- Independent 900Mhz. RF 2-ch. Headphone Transmitter
- 2 RF 2-ch. Padded Headphones Included
- FM Stereo Transmitter for OEM Integration
- RCA A/V Output for Auxiliary Source or Opposite Headrest
- Selectable DVD Mode or A/V Input from Opposite Headrest
- Hardwired Headphone Jack
- NTSC / PAL Auto Selection
- Independent Remote Controls
- 7/16" Pole Diameter w/ 5/8" Adapters
- 4" ~ 8" Pole Width Adjustment
- 480 x 234 16:9 Widescreen Resolution
- 400 NIT Screen Brightness
- Dimensions: 12" w x 5" d x 9" h



HDVD-92CCP

1 Pair Universal Replacement Headrest Package w/ DVD Player & 9" LCD

HDVD-72CCP

1 Pair Universal Replacement Headrest Package w/ DVD Player & 7" LCD



- Forward/Backwards Tilting Headrest
- 3 Changeable Color Skins Included (grey, beige, black)
- Master Headrest w/ Front-Load DVD Player for MP4, & DivX Playback
- Slave Headrest with Input from Master Headrest or Auxiliary Device
- Playback from DVDR/RW of 720p MP4 & DivX
- On-board 32GB SD/USB Readers for MP4 & DivX Playback
- Dual Channel Wireless IR Transmitter (use HP-12S)
- FM Stereo Transmitter for OEM Integration
- AUX A/V Input for Game Console Integration
- RCA A/V Input for Auxiliary Source
- RCA A/V Output to Opposite Headrest
- Hardwired Headphone Output Jack
- 3/8" Locking Pole w/ 1/2" & 9/16" Adapters
- 4.75" ~ 8.25" Pole Width Adjustment
- NTSC / PAL Auto Selection
- 800 x 480 16:9 Widescreen Resolution
- 400 NIT Screen Brightness
- Dimensions: 11.5" w x 6" d x 8.5" h (92CC)
- Dimensions: 10" w x 5.5" d x 7" h (72CC)



UNIVERSAL DVD/LCD HEADREST

HDVD-91CC
Universal Replacement Headrest Preloaded w/ DVD Player & 9" LCD

HDVD-71CC
Universal Replacement Headrest Preloaded w/ DVD Player & 7" LCD



- Forward/Backwards Tilting Headrest
- 3 Changeable Color Skins Included (grey, beige, black)
- Front-Loading DVD Player for DVD, MP4, & DivX Playback
- On-board 32GB SD/USB Readers for MP4 & DivX Playback
- Dual Channel Wireless IR Transmitter (use HP-12S)
- FM Stereo Transmitter for OEM Integration
- AUX A/V Input for Game Console or Personal Media Devices
- RCA A/V Input for Auxiliary Source or Opposite Headrest
- RCA A/V Output to Auxiliary Source or Opposite Headrest
- Hardwired Headphone Output Jack
- 3/8" Locking Pole w/ 1/2" & 9/16" Adapters
- 4.75" ~ 8.25" Pole Width Adjustment
- NTSC / PAL Auto Selection
- 800 x 480 16:9 Widescreen Resolution
- 400 NIT Screen Brightness
- Dimensions: 11.5" w x 6" d x 8.5" h (91CC)
- Dimensions: 10" w x 5.5" d x 7" h (71CC)



UNIVERSAL LCD HEADREST

H-91CC
Universal Replacement Headrest Pre-Loaded with 9" LCD

H-71CC
Universal Replacement Headrest Pre-Loaded with 7" LCD



- Forward/Backwards Tilting Headrest
- 3 Changeable Color Skins Included (grey, beige, black)
- Dual Channel Wireless IR Transmitter (use HP-12S)
- FM Stereo Transmitter for OEM Integration
- AUX A/V Input for Game Console Integration
- 2 RCA A/V Input for Auxiliary Source or Opposite Headrest
- Hardwired Headphone Output Jack
- 3/8" Locking Pole w/ 1/2" & 9/16" Adapters
- 4.75" ~ 8.25" Pole Width Adjustment
- NTSC / PAL Auto Selection
- 800 x 480 16:9 Widescreen Resolution
- 400 NIT Screen Brightness
- Dimensions: 11.5" w x 6" d x 8.5" h (91CC)
- Dimensions: 10" w x 5.5" d x 7" h (71CC)



H-70CC
Universal Replacement Headrest Pre-Loaded with 7" LCD

- Forward/Backwards Tilting Headrest
- 3 Changeable Color Skins Included (grey, beige, black)
- Dual Channel Wireless IR Transmitter (use HP-12S)
- RCA A/V Input for Auxiliary Source or Opposite Headrest
- Hardwired Headphone Output
- Full Function Remote Control Included
- 3/8" Locking Pole w/ 1/2" & 9/16" Adapters
- 4.75" ~ 8.25" Pole Width Adjustment
- NTSC / PAL Auto Selection
- 480 x 234 16:9 Widescreen Resolution
- 400 NIT Screen Brightness
- Dimensions: 10" w x 5.5" d x 7" h



HEADREST LCD MONITORS

PT-712IRA 7" Dual Channel IR Headrest Monitor

- Two Auxiliary A/V Input
- Dual Channel IR Transmitter
- Wired Headphone Output
- Low Refection TFT-LCD Monitor
- Ultra Bright LED Backlighting
- Selectable Aspect Modes
- Preset/Manual Image Control
- Dimmer Control
- Remote Control
- NTSC/PAL Selection
- 480 x 234 (16:9) Image Resolution
- Cutout Dimensions: 7" w x 4.75" h x .75" d



PT-700MHR 7" LCD Headrest Monitor

- 7" Amorphous Active Matrix TFT/LCD Monitor
- Ultra Bright LED Backlighting
- Ignition Power On/Off Optional
- Single Video Input
- Selectable Aspect Modes
- Preset/Manual Image Control
- NTSC/PAL Selection
- Sculptured Trim Ring Included
- Remote Control Included
- 480 x 234 (16:9) Image Resolution
- 400NIT Panel Brightness
- Cutout Dimension: 7" w x 4.5" h x 1" d




PT-727MSV 7" LCD Sun Visor Monitor

- 7" Amorphous Active Matrix TFT/LCD Monitor
- Ultra Bright LED Backlighting
- Ignition Power On/Off Optional
- Single Video Input
- Selectable Aspect Modes
- Preset/Manual Image Control
- NTSC/PAL Selection
- Sculptured Trim Ring Included
- Remote Control Included
- 480 x 234 (16:9) Image Resolution
- 400NIT Panel Brightness
- Cutout Dimension: 7" w x 4.5" h x 1" d



PTM-700 Universal Clip-on Rear View Mirror w/ 7" LCD

- 7" Amorphous Active Matrix TFT/LCD Monitor
- Ultra Bright LED Backlighting
- Ignition Power On/Off Optional
- Rear View Camera and Auxiliary Video Input
- Image Orientation Inversion
- Selectable Aspect Modes
- Preset/Manual Image Control
- Remote Control Included
- 480 x 234 16:9 Widescreen Resolution
- 300NIT Panel Brightness
- Dimension: 11" w x 4.25" h x .75" d

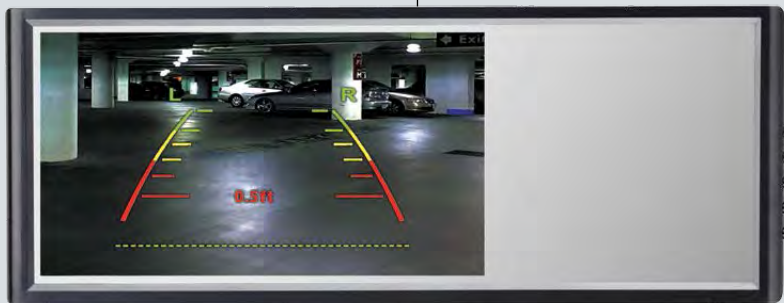

HEADPHONES

HP-10S Single 1ch. IR Headphone

- EVA hard carrying case included
- Foldable Ear Pads for Compact Storage
- On/Off Switch Saves Battery Life
- Auto Power Off Function
- Auto Mute Function
- Variable Volume Control
- ALC Auto Level Control



HP-12S Single 2ch. IR Headphone

- Adjustable Headphone Straps
- Channel Selectable From Each Headphone
- Ear Pads Fold Flat for Seat Pocket Storage
- EVA hard Carry Case Included
- MP-3 Player Input Via 3.5mm Jack
- On/Off Switch Saves Battery Life
- Auto Power Off Function
- Auto Mute Function
- Variable Volume Control
- ALC Auto Level Control



WLHP-100 Single 1ch. IR Headphone WLHP-200 Single 2ch. IR Headphone

- Adjustable Headphone Straps
- Single Channel UHF IR Receiver
- ON/OFF Switch Saves Battery Life
- Variable Volume Control
- ALC Auto Level Control
- Auto Off and Auto Mute



HP-K1B Single 1ch. IR Headphone, Blue HP-K1P Single 1ch. IR Headphone, Pink HP-K2B Single 2ch. IR Headphone, Blue HP-K2B Single 2ch. IR Headphone, Pink

- Single IR Headphone
- Youth Fit Adjustable Headband
- Youth Fit Collapsible Ear Pads
- AUX Input for Personal Media Player
- Auto Power Saver Function
- Momentary Mute Switch
- Variable Volume Control
- Color Match Carry Bag Included



HP-11S Single 1ch. IR Headphone HP-22IRT Pair 1ch. IR Headphones and Transmitter

- Ear Pads Fold Flat for Seat Pocket Storage
- Adjustable Headphone Straps
- EVA hard Carry Case Included
- MP-3 Player Input Via 3.5mm Jack
- On/Off Switch Saves Battery Life
- Auto Power Off Function
- Auto Mute Function
- Variable Volume Control
- ALC Auto Level Control



HP-900S Single 2ch. RF 900MHz Headphone HP-902RFT Pair 2ch. RF 900MHz Headphones & Transmitter

- Dual Stereo Audio Inputs
- Channel Selectable From Each Headphone
- 100ft. Operational Distance
- Adjustable Headphone Straps
- Ear Pads Fold Flat for Seat Pocket Storage
- EVA hard Carry Case Included
- MP-3 Player Input Via 3.5mm Jack
- On/Off Switch Saves Battery Life
- Auto Power Off Function
- Auto Mute Function
- Variable Volume Control
- ALC Auto Level Control



REAR VIEW CAMERAS

L-3CSB - BLACK L-3CSC - CHROME

License Plate Camera w/ Night Vision, Back-Up Sensors, On-Screen Distance Gauge, & Proximity Alerts

U.S. Patent #7,106,183 B2
2 Object Sensors w/ Proximity Alert
1/4" CCD Color Camera
0.5 LUX Low Light Lens
Waterproof Camera Housing
Waterproof External Wire Connections
Vertically Pivoting Camera Housing
7' Effective Viewing Distance

Inconspicuous Speaker Housing for Alerts
130° Capture Angle
8 IR LEDs for Night Viewing
On-Screen Distance Gauge
RCA Video Output
Cast Steel Alloy Frame
Reversed Image
640 x 480 Capture Resolution



LP-2CSB - BLACK LP-2CSC - CHROME

License Plate Frame w/ Night Vision Camera, Back-Up Sensors, On-Screen Distance Gauge, & Proximity Alerts

U.S. Patent #7,106,183 B2
3 Object Sensors w/ Proximity Alert
1/4" CCD Color Camera
0.5 LUX Low Light Lens
Waterproof Camera Housing
Waterproof External Wire Connections
Vertically Pivoting Camera Housing
7' Effective Viewing Distance

Inconspicuous Speaker Housing for Alerts
130° Capture Angle
8 IR LEDs for Night Viewing
On-Screen Distance Gauge
RCA Video Output
Cast Steel Alloy Frame
Reversed Image
640 x 480 Capture Resolution



LP-1CA

Chrome License Plate Frame with Camera

Chrome Finish on ABS License Plate Frame
Vertically Pivoting Camera Housing
On-Screen Distance Gauge
1/4" CCD Wide View Color Camera
0.1 LUX Low Light Lens

163° Capture Angle
RCA Video Output
Reversed Image
648 x 488 Resolution



CCD-4XS

1" SURFACE MOUNT REAR VIEW CAMERA

Vertically Pivoting Mounting Bracket
Waterproof Camera Housing
1/4" CCD Color Camera
0.1 Lux Low Light Lens
163° Capture Angle
On-Screen Distance Gauge
RCA Video Outputs
Reversed Image
648 x 488 Resolution
3/4" x 3/4" x 1"



CCD-1

WATER-PROOF SURFACE MOUNT REAR VIEW CAMERA

8 IR LEDs for Night Viewing
Vertically Pivoting Stand for Angled Installation
1/3" Sharp CCD Color Camera
0.1 LUX Low Light Lens
RCA Video Output
Reversed Image
512 x 582 Resolution



CCD-2

FLUSH MOUNT REAR VIEW BULLET CAMERA

2.5" Threaded Housing & Locking Collars
1/3" Sharp CCD Color Camera
0.1 LUX Low Light Lens
Weather-Resistant Housing
RCA Video Output
Reversed Image
510 x 492 Resolution



CCD-3

SURFACE MOUNT REAR VIEW BULLET CAMERA

12 IR LEDs For Night Viewing
Pivoting Stand for Angled Installations
1/4" Sharp CCD Color Camera
0.1 LUX Low Light Lens
RCA Video Output
Reversed Image
510 x 380 Resolution



ACCESSORIES

DTV-MHU

Universal DTV-MH TV Tuner

Universal A/V RCA Outputs For Any Device
Electronic Programming Guide for Channel Surfing
Full DTV-MH 57-803MHz Receiving Frequencies
Remote Control & IR Repeater Included
Neodymium Magnetic Antenna Included
Favorite Channels Programming
CCD Closed Captions Optional
OSD Language: English, Spanish, & French
4:3 or 16:9 Aspect Ratio
SDTV 720P Video Signal



DTV-2U

UNIVERSAL ATSC DIGITAL TV TUNER

Full DTV 57-803MHz Receiving Frequencies
Electronic Programming Guide for Channel Surfing
OSD Language Options: English, Spanish, & French
Favorite Channels Programming
CCD Closed Captions Optional
4:3 or 16:9 Aspect Ratio
SDTV 720P Video Signal
RCA Video and Stereo Audio Outputs
Antenna, Remote, & Eye Included



VB-1

ONE IN & FOUR OUTPUT VIDEO SIGNAL BOOSTER

Four Individual Output Trimmer Gain Controls
Shielded Metal Housing For Noise Rejection
4 Video Output Gain control



ANT-4VCR

BOOSTER ANTENNA

Mini-plug/RG-59 Cable Style Connector
Single Channel Input 20dB Gain
Cable Length 12 Feet
Receives Signals On Ch. 2-13 & 14-69
Output Impedance: 75 Ohm



EFM-01

PLL FM MODULATOR

PLL Phase Lock Loop Tuner Outputs
8 Frequency Settings On Selectable DIP Switches
Shielded Metal Housing For Noise Rejection



EFM-02

PLL FM MODULATOR

PLL Phase Lock Loop Tuner Outputs
3 Frequency Settings Via Slide Switch
Ground Loop Isolator Circuit
Shielded Metal Housing For Noise Rejection



FMT-3

FM TRANSMITTER

Wireless 3 CH FM Transmitter
Easy Installation
Shielded Housing For Noise Rejection



XENON SUPERWHITE BULBS



ALL MODELS COME IN PAIRS



www.PowerAcoustik.com

©2013 POWER ACOUSTIK
MONTEBELLO, CALIFORNIA, U.S.A. ALL RIGHTS RESERVED
SPECIFICATIONS AND DESIGNS ARE SUBJECT TO CHANGE WITHOUT NOTICE.
PRINTED IN U.S.A