



POWER ACOUSTIK®

INNOVATOR IN MOBILE ENTERTAINMENT

2014

WWW.POWERACOUSTIK.COM

BAMF AMPLIFIERS

New to the BAMF family are these diamonds-in-the-rough, using the latest and greatest in full range class D technology. Previously considered only for subwoofer amplifiers, class D topology proves itself a contender for full range sound. Class D full range advantages start with stable high power capability in small compact, install-me-anywhere footprint. 90%+ efficient power supplies and optimized output devices mean less heat build-up and fatigue after extended playtime. Primarily SMD circuit boards using low tolerance parts keeps unwanted harmonic distortion at bay. Available configurations include 4ch, 5ch, and high power monoblock.



**Increased Efficiency Full
Range Class D Technology**

NEW 

**Interchangeable Top Panel
for Unique Installation**

High Efficiency Class D Full Range Amplifiers
Hybrid Aluminum Alloy Heatsink for Optimum Dissipation
2-ohm Stereo & 4-ohm Bridged Full Range Operation
1-ohm Stable Monoblock Operation
MOSFET Power Supply w/ Audiophile Grade IR™ Transistors
Military Grade SMT PCB Maintains Dynamic Performance
Direct Short, Thermal, & Overload Circuits Protect Amplifier
Easy DIY Install Single Sided Terminals & Controls

Angled Wire Terminals Secure Wire Connections
Interchangeable Top Panel for Unique Installation
Chassis Integrated Aluminum Mounting Points
Variable 12dB High Pass, Low Pass, & Subsonic Crossovers
200mV-7.5V Low Level RCA Inputs
18dB Bass Boost Increases Low Octave Harmonics
180° Phase Shift Improves Low Octave Dynamics (monoblock)
Dash Mount Gain Control Module Included (select models)

Class A/B Full Range	Max Power (watts)	RMS Power 4Ω Bridged, 14.4V	RMS Power 2Ω, 14.4V	RMS Power 4Ω, 14.4V	Dimensions (2"h x 7"w)	Gain Control Included
BAMF1600/4D	1,600w	2 x 340	4 x 170	4 x 125	11"	-
BAMF2600/4D	2,600w	2 x 600	4 x 300	4 x 200	11"	-
BAMF4500/5D	4,500w	2 x 600 + 1 x 900 1Ω	4 x 300 + 1 x 650	4 x 200 + 1 x 425	12.75	Included
BAMF2600/1D	2,600w	1 x 1,400 1Ω	1 x 1,100	1 x 900	11"	Included

AMPLIFIERS

BAMF

Sometimes you have to call them like you see them; these full MOSFET amplifiers will tear-up your ride and bring out your inner beast. You won't have one seal left in your car to keep water out! This is a (B)ad (A) __ (M)other (F)letcher.



All MOSFET Class D Monoblock Amplifiers
Cast Aluminum Alloy Heatsink for Optimum Dissipation
1-ohm Stable Monoblock Operation
Strap 2 Like-Models Together for Double Power!
MOSFET Power Supply & Audio Output Transistors
Direct Short, Thermal, & Overload Circuits Protect Amplifier
Easy DIY Install Single Sided Terminals & Controls

Chassis Integrated Aluminum Mounting Points
Variable 12dB Low Pass Crossover
Variable 12dB Subsonic Crossover Protects Subwoofer
200mV-6.0V Low Level RCA Inputs
12dB/18dB Bass Boost Increases Low Octave Harmonics
180° Phase Shift Improves Low Frequency Dynamics
Dash Mount Gain Control Module Included

Class D Monoblock	Max Power (watts)	RMS Power 1Ω, 14.4V	RMS Power 2Ω, 14.4V	RMS Power 4Ω, 14.4V	Dimensions (2.125"h x 8.25"w)	Gain Control
BAMF2000/1D	2,000	1,200	900	600	11.375"	Included
BAMF4000/1D	4,000	2,200	1,700	1,200	13.75"	Included
BAMF5500/1D	5,500	3,200	2,500	1,700	16.875"	Included

RAZOR AMPLIFIERS

We're in a time where small is "in". Smaller, more economic vehicles are more and more desirable. But that doesn't mean you have to sacrifice big power for your system. Razor amplifiers pack huge power into small chassis thanks to efficient Full-Range Class D topology and SMT circuitry. Complimented with every possible preamp adjustment, the Razor amplifiers leave nothing to be desired...



Installs in Virtually ANY Location!

Increased Efficiency Full Range Class D Technology

Compact 4.75" Chassis Design for Installation Versatility
MOSFET Power Supply w/ Audiophile Grade IR™ Transistors
Military Grade SMT PCB Maintains Dynamic Performance
2-ohm Stereo & 4-ohm Bridged Full Range Operation
2-ohm Minimum Impedance Stability (monoblocks)
Direct Short, Thermal, & Overload Circuits Protect Amplifier



200mv-6V Low Level RCA Inputs
High Level Input w/ Signal Sense Auto Turn-on
Variable 12dB High Pass & Low Pass Crossovers
10-50Hz Variable 12dB Subsonic Crossover Protects Subwoofers
12dB Bass Boost Increases Low Octave Harmonics (monoblocks)
Dash Mount Gain Control Module Included (select models)

RAZOR CLASS D	Max Power (watts)	RMS Power 4Ω Bridged, 14.4V	RMS Power 2Ω, 14.4V	RMS Power 4Ω, 14.4V	Dimensions (4.75" w x 1.625" h)	Gain Control Included
RZ2-1300D	1,300	1 x 540	2 x 270	2 x 185	5.5"	Included
RZ4-1200D	1,200	2 x 300	4 x 150	4 x 100	9"	-
RZ4-2000D	2,000	2 x 500	4 x 250	4 x 190	11"	-
RZ5-2500D	2,100	300 x 2 + 600 x 1	150 x 4 + 600 x 1	100 x 4 + 400 x 1	12.25"	Included
RZ1-1500D	1,500	-	1 x 900	1 x 600	10"	Included
RZ1-2300D	2,300	-	1 x 1,400	1 x 900	11"	Included

Crypt AMPLIFIERS

Don't let these little monsters fool you. The latest and greatest of class D full range technology allows us to pack 10lbs of KICK YOUR ASS in less than 2lb chassis. Once regarded as "dirty power", class Ds stable performance, thanks to high power capability, maximum efficiencies, and low tolerance components, rivals traditional full range applications. Minimal power requirements, ultra micro footprint, unbelievable sound quality, and easy install make Crypt amplifiers great for any car, motorcycle, boat, or off-road vehicle...

**90%+ Efficient
Class D Full Range**

ONLY 3" x 6" !

**Install-Me-Anywhere
Micro Footprint**



**Dash Mount Gain
Control Included
(monoblock)**

 **NEW**

Hybrid Aluminum Alloy Heatsink for Optimum Dissipation
2-ohm Stereo & 4-ohm Bridged Full Range Operation
2-ohm Minimum Impedance Monoblock Operation
MOSFET Power Supply w/ Audiophile Grade IRTM Transistors
Military Grade SMT PCB Maintains Dynamic Performance
Direct Short, Thermal, & Overload Circuits Protect Amplifier
200mV-12V High Level or Low Level RCA Input

Quick Disconnect RCA/High Level Wire Harness
Quick Disconnect Power and Speaker Output Harness
Variable 12dB High Pass, Low Pass, & Subsonic Crossovers
12dB Bass Boost Increases Low Octave Harmonics (monoblock)
Dash Mount Gain Control Module Included (select models)

CRYPT CLASS D	Max Power (watts)	RMS Power 4Ω Bridged, 14.4V	RMS Power 2Ω, 14.4V	RMS Power 4Ω, 14.4V	Dimensions (3"w x 1.5"h)	Remote Gain Control
CA4-1600D	1,600	2 x 400	4 x 200	4 x 130	6"	-
CA1-1200D	1,200	-	1 x 550	1 x 350	6"	Included

GOthic AMPLIFIERS



When something works so well, outperforms the competition, and has done this for 12 years, you don't mess with it! All ya gotta do is just make it look awesome again for current times. What else can we say? Gothic amps are stickin' and kickin'!

Class A/B Full Range & Class D Monoblock Amplifiers
2-ohm Stereo & 4-ohm Bridged Full Range Operation
2-Ohm Stable Class A/B Monoblock Operation
1-ohm Stable Class D Monoblock Operation
Strap 2 Like-Monoblocks Together for Double Power!
Military Grade PCB w/ PWM MOSFET Power Supply
Direct Short, Thermal, & Overload Circuits Protect Amplifier

High Level Input w/ Signal Sense Auto Turn-on
200mV-6V Low Level RCA Inputs
Pre-Amp Low-Level Outputs (select models)
Variable 12dB High Pass, Low Pass, & Subsonic Crossovers
12dB/18dB Bass Boost Increases Low Octave Harmonics
180° Phase Shift Improves Low Frequency Dynamics
Dash Mount Gain Control Module Included (select models)

Class A/B Full Range	Max Power (watts)	RMS Power 4Ω Bridged, 14.4V	RMS Power 2Ω, 14.4V	RMS Power 4Ω, 14.4V	Dimensions (9.75" w x 2.5" h)	Remote Gain Included
GT2-1300	1,300	1 x 520	2 x 260	2 x 200	11.75"	Included
GT2-1800	1,800	1 x 720	2 x 360	2 x 280	13.7"	Included
GT4-400	400	2 x 90	4 x 40	4 x 30	4.75"	-
GT4-900	900	2 x 190	4 x 95	4 x 75	9"	-
GT4-1200	1,200	2 x 250	4 x 125	4 x 100	11.5"	-
GT4-2600	2,600	2 x 550	2 x 275	4 x 215	15.75"	-
GT5-2500	2,500	2 x 250, 1 x 600	4 x 125, 1 x 600	4 x 100, 1 x 480	15.75"	Included

Class D Monoblock	Max Power (watts)	RMS Power 1Ω, 14.4	RMS Power 2Ω, 14.4V	RMS Power 4Ω, 14.4V	Dimensions (9.75" w x 2.5" h)	Remote Gain Included
GT1-1000 (A/B)	1,000	-	470	375	9"	Included
GT1-2400D	2,400	1,500	1,150	900	10.75"	Included
GT1-4500D	4,500	2,700	2,200	1,700	14.75"	Included
GT1-6000D	6,000	3,700	3,000	2,300	17.5"	Included

"Not just the Reaper, it's the Grimm Reaper"

You may have a need to have music move you in ways no one else can understand. The Reaper is capable of delivering music so low and so loud that it could possibly disembowel you. You don't need to wear a black cloak but I would suggest you buy a space pressure suit to keep your internal organs in place. The beauty is we can take high level six-volt inputs or low level RCA's and turn that music into a signal strong enough to shatter glass. Many models include dash mounted sub controls and our Class "D" amplifiers are Strapable in two ohm loads. Don't settle for second best, let the reaper deliver you!

Reaper

AMPLIFIERS



Class A/B Full Range & Class D Monoblock Amplifiers
2-ohm Stereo & 4-ohm Bridged Full Range Operation
2-Ohm Stable Class A/B Monoblock Operation
1-ohm Stable Class D Monoblock Operation
Strap 2 Like-Monoblocks Together for Double Power!
Military Grade PCB w/ PWM MOSFET Power Supply
Direct Short, Thermal, & Overload Circuits Protect Amplifier

High/Speaker Level Input (select models)
200mV-8V Low Level RCA Inputs
Pre-Amp Low-Level Outputs (select models)
Variable 12dB High Pass, Low Pass, & Subsonic Crossovers
12dB/18dB Bass Boost Increases Low Octave Harmonics
180° Phase Shift Improves Low Frequency Dynamics
Dash Mount Gain Control Module Included (select models)

Class A/B	Max Power	RMS Power	RMS Power	RMS Power	Dimensions	Gain Control
Full Range	(watts)	4Ω Bridged, 14.4V	2Ω, 14.4V	4Ω, 14.4V	(2.5"h x 9"w)	Included
REP2-450	450	1 x 220	2 x 110	2 x 85	7"	-
REP2-1300	1,300	1 x 520	2 x 260	2 x 200	12.50"	-
REP4-900	900	2 x 220	4 x 110	4 x 85	10.00"	-
REP4-1400	1,400	2 x 320	4 x 160	4 x 120	12.50"	-
REP4-1700	1,700	2 x 420	4 x 210	4 x 160	14.00"	-
REP4-2300	2,300	2 x 520	4 x 260	4 x 200	15.50"	-

Class D	Max Power	RMS Power	RMS Power	RMS Power	Dimensions	Gain Control
Monoblock	(watts)	1Ω, 14.4V	2Ω, 14.4V	4Ω, 14.4V	(2.5"h x 9"w)	Included
REP1-2000 (A/B)	2,000	-	900	650	11.75"	Included
REP1-2100D	2,100	1,200	950	700	9.75"	Included
REP1-3500D	3,500	2,000	1,500	1,200	12.75"	Included
REP1-6000D	6,000	3,300	2,500	1,900	17.25"	Included

mofo SUBWOOFER

MOFO X subwoofers are refined and increase efficiency dramatically! MOFO-X subs use a composite sandwich cone with a polypropylene surface for durability and Spruce pulp backing for smooth low bass. Like the original MOFOs, the new models still use an aluminum dustcap that couples to the voice coil former and extends over the cone. Why? The fins brace the cone and eliminate cone flex during high excursion. And since they are aluminum and couple to the voice coil, they act as a heatsink or heat extractor. Using the latest materials, the new MOFO subs yield superior performance. Cast aluminum baskets? Of course! Increased bottom octave output? You Bet! Louder than the original design? Duh!!

Overcompensating Motor Structure for Increased Magnetic Strength
 12mm T-Yoke & Top Plate Improve Low Frequency Dynamics
 Vented T-Yoke & Frame Reduces Voice Coil Heat Build-up
 Die Cast Aluminum Heatsink Dust Cap Absorbs Voice Coil Heat
 Aluminum Dust Cap Fins Dissipate Heat & Strengthen Cone
 Non-Magnetic Non-Resonate Die-Cast Aluminum Frame
 2.5" 4-Layer Voice Coil w/ Large Gauge Wire Increases Power Handling
 High-Temperature Tolerance Adhesives Resist Thermal Failure
 Nickel Plated 8ga Spring-Loaded Compression Wire Terminals
 Non-Transfer Spruce Pulp Cone w/ UV & Chemical Protection
 High Density Polyether Foam Surround w/ UV & Chemical Protection
 Dual Poly-Cotton Suspension Dampen Violent Accelerations
 Stitched Voice Coil Leads Prevent Potential Damage
 1-pc Gasket/Trim Ring w/ Concealed Mounting Holes Included



Pre-Assembled Re-cone Kit Available

MOFO	Max Power	RMS Power	Efficiency	Voice Coil	Motor	Mounting	Optimum Sealed	Optimum Ported
Subwoofers	Handling	Handling	(1w/1m)	Configuration	Volume	Depth	Enclosure ft ³	Enclosure ft ³
MOFO-122X	2,700	1,500	85.37	2.50" Dual 2Ω	373oz.	6.875"	1.00	2.00
MOFO-124X	2,700	1,500	85.40	2.50" Dual 4Ω	373oz.	6.875"	1.00	2.00
MOFO-152X	3,000	1,700	86.90	2.50" Dual 2Ω	373oz.	8.125"	2.00	4.00
MOFO-154X	3,000	1,700	86.97	2.50" Dual 4Ω	373oz.	8.125"	2.00	4.00

GOTHIC

SUBWOOFER



Twisted & Woven Flax Fiber Cone

All Gothic woofers use torsion twisted Flax fibers woven together for ultimate strength and less elasticity. A heavy soaking in epoxy combined with the sonic qualities of pulp paper, Flax proves itself worthy of any system.

Extended Excursion NBR Surround

A strong and flexible heat resistant compound, nitrile butadiene rubber is used widely in automotive applications. Gothic woofers utilize an extended excursion NBR surround for its strength and flexible properties during extreme movement.

Back Plate & T-Yoke Venting

Heat build-up is a leading cause of catastrophic woofer failure. Venting built into the T-Yoke, back plate, and voice coil extract and dissipate heat, ensuring Gothic woofers keep their cool.

Overcast Stitched Cone Assembly

Surrounds of Gothic woofers are double overcast stitched directly to the Flax cone surface. In addition to superior adhesives, overcast stitching improves the conventional bond between cone and surround.

100% OFC 4-Layer Voice Coil

Gothic woofers use generous 1.50" long, 2.5" diameter 100% OFC Copper voice coils. A vented Aluminum former extract and dissipate any heat build-up, resulting in improved power handling.

Gothic	Max Power	RMS Power	Efficiency	Voice Coil	Motor	Mounting	Optimum Sealed	Optimum Ported
Subwoofers	Handling	Handling	(1w/1m)	Configuration	Volume	Depth	Enclosure ft ³	Enclosure ft ³
GW3-10	2,200	1,000	81.30	2.50" Dual 2Ω	204oz.	6.00"	1.00	1.50
GW3-12	2,500	1,200	83.60	2.50" Dual 2Ω	254oz.	6.50"	1.50	2.25
GW3-15	3,000	1,400	84.00	2.50" Dual 2Ω	254oz.	7.50"	2.75	3.25

SUBWOOFER Crypt



Closed Cell Polyurethane Surround

Polyurethane is a foam compound used in the manufacture of countless gasket and insulation products, known for its adhesive bonding properties. Crypt PU surrounds also have built-in expansion pockets to flex and relieve stresses during extreme use.

Overcast Stitched Cone Assembly

Surrounds of Crypt woofers are double overcast stitched directly to the cone surface. In addition to superior adhesives, overcast stitching improves the conventional bond between cone and surround.

Back Plate & T-Yoke Venting

Heat build-up is a leading cause of catastrophic woofer failure. Venting built into the T-Yoke, back plate, and voice coil extract and dissipate heat, ensuring Crypt woofers keep their cool.

100% OFC 4-Layer Voice Coil

Crypt woofers use generous 1.25" long, 2.00" diameter 100% OFC Copper voice coils. A vented Aluminum former extract and dissipate any heat build-up, resulting in improved power handling.

Crypt Subwoofers	Max Power Handling	RMS Power Handling	Efficiency (1w/1m)	Voice Coil Configuration	Motor Volume	Mounting Depth	Optimum Sealed Enclosure ft ³	Optimum Ported Enclosure ft ³
CW2-102	1,800	720	88.40	2.00" Dual 2Ω	162oz.	5.875"	1.00	1.50
CW2-104	1,800	720	88.40	2.00" Dual 4Ω	162oz.	5.875"	1.00	1.50
CW2-122	2,000	850	89.90	2.00" Dual 2Ω	190oz	6.375"	1.25	1.75
CW2-124	2,000	850	89.90	2.00" Dual 4Ω	190oz	6.375"	1.25	1.75
CW2-152	2,200	1,000	88.90	2.00" Dual 2Ω	190oz	7.25"	2.50	3.00
CW2-154	2,200	1,000	88.90	2.00" Dual 4Ω	190oz	7.25"	2.50	3.00

Reaper

SUBWOOFER



Closed Cell Polyurethane Surround

Polyurethane is a foam compound used in the manufacture of countless gasket and insulation products, known for its adhesive bonding properties. Reaper PU surrounds also have built-in expansion pockets to flex and relieve stresses during extreme use.

Overcast Stitched Cone Assembly

Surrounds of Reaper woofers are double overcast stitched directly to the cone surface. In addition to superior adhesives, overcast stitching improves the conventional bond between cone and surround.

Back Plate & T-Yoke Venting

Heat build-up is a leading cause of catastrophic woofer failure. Venting built into the T-Yoke, back plate, and voice coil extract and dissipate heat, ensuring Reaper woofers keep their cool.

100% OFC 4-Layer Voice Coil

Reaper woofers use 1" long, 2" diameter 100% OFC Copper voice coils. A vented Aluminum former extract and dissipate any heat build-up, resulting in improved power handling.

Reaper Subwoofers	Max Power Handling	RMS Power Handling	Efficiency (1w/1m)	Voice Coil Configuration	Motor Volume	Mounting Depth	Optimum Sealed Enclosure ft ³	Optimum Ported Enclosure ft ³
RW1-8	600	240	89.50	2.00" Single 4Ω	86oz.	4.25"	0.50	1.00
RW1-10	900	360	87.30	2.00" Single 4Ω	104oz.	4.875"	1.00	1.50
RW1-12	1,200	500	89.20	2.00" Single 4Ω	127oz.	5.75"	1.25	1.75

Reaper



Injection Molded Polypropylene Cone

NBR Rubber Surround

Vented Back Plate Pole Piece

Quick Disconnect Terminals

Pressed Steel Frame

Reaper Subwoofers	Max Power Handling	RMS Power Handling	Efficiency (1w/1m)	Voice Coil Configuration	Motor Volume	Mounting Depth	Optimum Sealed Enclosure ft ³	Optimum Ported Enclosure ft ³
REP-12	600	200	85.60	1.50" Single 4Ω	76oz.	5.00"	1.00	2.00

Many vehicles do not have tons of space available for a big, bulky enclosure. Some vehicle, like some crew-cab trucks, have no space for a subwoofer. Until now... The THIN-13 is now the shallowest woofer on the market! Coming in at a mere 2" of depth, they will fit behind rear crew-cab truck seats, under many front seats, or even in a friggin' door with some custom fabrication! While other "shallow mount" subwoofers are available, they typically require traditional airspace. The THIN-13 is 13.25" in diameter and not only does it play in enclosures as small as .5 cubic foot well (typical for most 8"-10" woofers), but it reproduces lower frequency response than most 12" woofers in much larger enclosures. No more whining about not having a subwoofer available that will fit in virtually every vehicle! THIN-13 has you covered...

SUBWOOFER

THIN



Thin-13 Woofer Preloaded in THIN-13BX



THIN-13BX Preloaded Enclosure

13" THIN Shallow Mount Subwoofer Enclosure
700w MAX Power Handling
4-Ohm Impedance
.6 cubic foot Preloaded Enclosure
Carpeted Grey w/ Embroidered Accents
30" l x 14.5" h x 5.25"/2.25" d



THIN-12BX Preloaded Enclosure

Pre-loaded Enclosure w/ 12" Subwoofer
4 Ohm Impedance
650W Power Handling
Carpeted Black w/ Embroidered Accents
29.75" l x 14.5" h x 5.75"/2.25" d



NEW

THIN-8A Preloaded Enclosure

Pre-loaded Active Enclosure w/ 8" Subwoofer
500w MAX Monoblock Amplifier Built-In
Cast Aluminum Chassis
Hi-Speaker Level Inputs
200mV-6V Low Level RCA Input
Variable 2dB Low Pass Crossover
180° Phase Inversion Switch
Dash Mount Gain Control Included
3" h x 9.5" w x 13.5" l

Crypt

CPT-60C

6.5" Component System

160W Max Power Handling
4-Ohm System Impedance
Polypropylene Injection Cone
NBR Rubber Surround
1" Voice Coil on Aluminum Former
Quick Disconnect Terminals
Conex Spider Suspension
1" Flush Mount Dome Tweeter
Passive Crossover Included
Speaker Grill Included
Freq-Response: 70-20kHz
Sensitivity: 92dB
Mounting Depth: 2.5"



IMPP Polypropylene Cone
NBR Rubber Surround
1" Voice Coil on Aluminum Former
4-ohm System Impedance
Quick Disconnect Terminals
1.125" Mylar Midrange (CF-694)
1" Mylar Tweeter
.5" Super Tweeters

Crypt	Size & Full Range	MAX Power	Magnet Volume (oz)	Frequency Response	Efficiency (1w/1m dB)	Mounting Depth
CF-694	6"x9" 4-way	380w	30 oz.	45-20kHz	90dB	3.25"
CF-573	5" x 7" 3-way	240w	10 oz.	65-20kHz	89dB	2.125"
CF-653	6.5" 3-way	220w	10 oz.	65-20kHz	89dB	2.125"
CF-502	5.25" 2-way	180w	10 oz.	80-20kHz	87dB	2"
CF-4103	4"x10" 2-way	300w	15 oz.	60-20kHz	89dB	2.125"
CF-462	4"x6" 2-way	180w	10 oz.	80-20kHz	87dB	2"
CF-402	4" 2-way	160w	5.3 oz.	100-20kHz	87dB	1.875"

Reaper



Vacuum Form Polypropylene Cone
NBR Rubber Surround
1" Voice Coil on Aluminum Former
4-ohm System Impedance
Quick Disconnect Terminals
2" Mylar Midrange (RF-693)
1" Mylar Tweeter

Reaper	Size &	MAX	Magnet	Frequency	Efficiency	Mounting
Full Range	Type	Power	Volume (oz)	Response	(1w/1m dB)	Depth
RF-693	6"x9" 3-way	330w	24.3 oz	45-20kHz	88dB	3.25"
RF-573	5" x 7" 3-way	200w	6.50 oz	65-20kHz	87dB	1.75"
RF-652	6.5" 2-way	190w	6.50 oz	65-20kHz	88dB	1.75"
RF-502	5.25" 2-way	160w	4.25 oz	80-20kHz	86dB	2.125"
RF-402	4" 2-way	140w	4.00 oz	100-20kHz	86dB	1.75"

CAPACITORS

NB-1 2-Way Mount Tweeter 200 Watts

Niobium Rare Earth Ferroelectric Transducer Magnet
Polypropylene Diaphragm
100 Watts R.M.S.
Freq. Resp. 5kHz to 25KHz
Imp. 4 Ohm
Surface/Angle Mount
SPL 97 dB
Built in Crossover



NB-2 3-Way Mount Tweeter 200 Watts

Niobium Rare Earth Ferroelectric Transducer Magnet
Polypropylene Diaphragm
100 Watts R.M.S.
Freq. Resp. 5kHz to 25KHz
Imp. 4 Ohm
Surface/Angle Mount/Flush Mount
SPL 97 dB
Built in Crossover



NB-4 4-Way Mount Tweeter 250 Watts



Niobium Rare Earth Ferroelectric Transducer Magnet
Swivel/Surface/Angle Mount/Flush Mount
Polypropylene Diaphragm
Built in Crossover
Freq. Resp. 5kHz to 25KHz
Imp. 4 Ohm
SPL 97 dB



NB-9 300w High Performance Tweeter

Niobium Rare Earth Ferroelectric Transducer Magnet
12dB In-Line Passive Crossover Included
Surface or Flush Mounting Option
Polypropylene Diaphragm
Frequency. Response: 5k-25KHz
Impedance: 4 Ohm
Efficiency: 99dB



NEW 

NX-5 Bullet Tweeter 200 Watts MAX

1" Horn Loaded Bullet tweeter
Machined Aluminum Chassis
Titanium Dome Diaphragm
1" High Temperature Voice Coil
Acrylic Phase Plug
High Strength Neodymium Magnet
Freq. Resp 3kHz–20kHz
Impedance: 3 ohm
Efficiency: 109dB
Sold in pairs



NX-2 Horn Tweeter 160 Watts MAX

NX-3 Horn Tweeter 200 Watts MAX

Horn Loaded Compression Tweeter
1" Aluminum Dome Diaphragm (NX-2)
1.75" Aluminum Dome Diaphragm (NX-3)
Phase Inversion Plug
6dB Crossover Capacitor Included
Freq. Resp 3kHz – 20kHz
4-Ohm Impedance
Efficiency: 106dB (NX-4)
Efficiency: 109dB (NX-3)
Sold Individually



XPS-104 4" Midrange

300 watts max
.75" Voice Coil
Freq. Resp. 450 Hz. to 10kHz.
15 oz. Magnet
Imp. 4 Ohm
SPL 92 dB
Mounting Depth: 1.75"
Sold Individually



PRO Audio Midrange Speakers



MID-80

NEW



PRO-654



PRO-804



MID-65

Pro Audio Mid-Range	Size & Type	MAX Power	Impedance	Frequency Response	Efficiency (1w/1m dB)	Mounting Depth
PRO-654	6.5"	170w	4Ω	150-10kHz	96dB	2.75"
MID-65	6.5"	300w	4Ω	150-15kHz	96dB	2.75"
PRO-804	8"	200w	4Ω	120-8kHz	97dB	3.25"
MID-80	8"	350w	4Ω	1202-8kHz	98dB	3.25"

CAPACITORS

PC1.5F

1.5 Farad Power Capacitor



Terminal Post for Ring Terminal
Digital Voltage Meter
Translucent Mounting Brackets
Brushed Aluminum Finish

PC2.0F

2 Farad Power Capacitor



12-16 DC Volts Operation
Terminal Post for Ring Terminal
Digital Voltage Meter
Translucent Mounting Brackets
Chrome Plated Finish

PCX-3F

3 Farad Power Capacitor

PCX-5F

5 Farad Power Capacitor

12-16 DC Volts Operation
Terminal Post for Ring Terminal
Digital Voltage Meter
Polarity & Voltage Protection
Protection Alert Indicator
LED Accent Lighting
Satin Finish w/ Chrome Accents




PCX-10F

10 Farad **Hybrid** Power Capacitor

PCX-30F

30 Farad **Hybrid** Power Capacitor

12-16 DC Volts Operation
Internally Stacked Carbon-Foil Capacitors
Direct Connect 0 ga. Terminals & 4 ga. Reducers
Digital Voltage Meter
Polarity & Voltage Protection
Protection Alert Indicator
LED Accent Lighting
Satin Finish w/ Chrome Accents

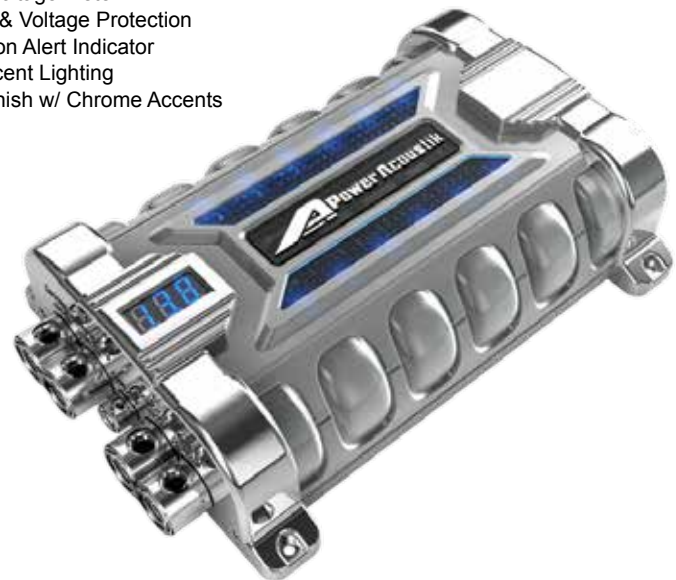

AMP WIRE KITS

AKIT-0 0g Amplifier Wire Kit

17ft 0ga Matte Blue Power Wire
3ft 0ga Matte Clear Ground Wire
30ft 12ga Matte Blue/Clear Speaker Wire
17ft. Blue/Clear Twisted Pair RCA & Remote Wire
150A In-line ANL Fuse and Holder
Complete Installation Accessories

NEW 



AKIT-2 2ga Amplifier Wire Kit

17ft 2ga Matte Blue Power Wire
3ft 2ga Matte Clear Ground Wire
30ft 12ga Matte Blue/Clear Speaker Wire
17ft. Blue/Clear Twisted Pair RCA & Remote Wire
100A In-line Maxi Fuse and Holder
Complete Installation Accessories

AKIT-4 4ga 4ch. Amplifier Wire Kit

17ft 4ga Matte Blue Power Wire
3ft 4ga Matte Clear Ground Wire
60ft 12ga Matte Blue/Clear Speaker Wire
2pc 17ft. Blue/Clear Twisted Pair RCA & Remote Wire
60A In-line Maxi Fuse and Holder
Complete Installation Accessories

AKIT-8 8ga Amplifier Wire Kit

17ft 8ga Matte Blue Power Wire
3ft 8ga Matte Clear Ground Wire
30ft 12ga Matte Blue/Clear Speaker Wire
17ft. Blue/Clear Twisted Pair RCA & Remote Wire
60A In-line Maxi Fuse and Holder
Complete Installation Accessories



WINDOW FILM TINT

Automotive and Commercial Application Window Tint

Our window film uses impregnated color chips and twin UV inhibitors in the initial manufacturing process. This insures maximum benefit for your interior. Traditional manufacturing process uses clear chips and adds dyes, pigments, or spray-on colors, and a UV inhibitor in the adhesive.

Additional Benefits

Color-stable film that never bubbles, peels, or turns purple over time
Malleable for seamless attachment to curved surfaces
American made adhesives for impervious seal and undistorted views
Reduces heat, glare and overall energy costs when used in home or auto
Eliminate harmful UV by 99% to protect interior materials in home or auto
Lifetime Warranty with Everlast Series, Made in U.S.A.
4-Year Prorated Warranty with Elite Series
Available in 20", 24", 36", 40" Width, all in 100ft. length
Everlast Series Available in 60" Width

Everlast Series

EV-05	6% VLT
EV-15	16% VLT
EV-20	21% VLT
EV-35	35% VLT
EV-50	51% VLT

Elite Series

LT-05	6% VLT
LT-20	22% VLT
LT-35	33% VLT
LT-50	51% VLT



AUDIO PROCESSORS

BASS-10C Bass Maximizer



PWM High Head Room Power Supply
 27-63Hz Parametric Bass Boost
 Variable Bandwidth Adjustment
 Max Output Level: 13.5 volt
 Dash Mount Remote Control
 LED MAX Bass Indicators
 Selectable Subsonic Filter
 Balanced RCA Inputs
 Selectable Input Ground Sources
 Selectable Grounding Isolation
 Frequency Response: 10~100kHz
 THD: 0.003%
 S/N Ratio: 130dB
 Input Noise Rejection: 60 dB

BASS-12C Bass Maximizer



Chrome Finish w/ Illuminated Badge
 PWM High Head Room Power Supply
 27-63Hz Parametric Bass Boost
 Variable Bandwidth Adjustment
 Max Output Level: 13.5 volt
 Dash Mount Remote Control
 LED MAX Bass Indicators
 35-80Hz Variable Subsonic Filter
 Balanced RCA Inputs
 Selectable Input Ground Sources
 Selectable Grounding Isolation
 Frequency Response: 10~100kHz
 THD: 0.003%
 S/N Ratio: 130dB

C-30XR 3-Way 12dB Electronic Crossover



6-Channel Low-Level Input
 6-Channel Low-Level Output w/ 5V Gain
 2/4 Channel Input Selection
 Independent Front/Rear High Pass
 Independent Subwoofer Low Pass
 Stereo or Mono Subwoofer Output Selection
 180° Phase Switch
 Variable Frequency & Gain Bass Boost
 Dash Mount Remote Subwoofer Gain Module
 S/N Ratio: 95dB
 Channel Separation: 60dB



PWM-70 7-Band 1/2 DIN Equalizer

- 2 Selectable Balanced Inputs
- Selectable Input Sensitivity
- 7 bands +/- 18dB Parametric Equalizer
- Independent Volume & Fader Control
- Independent Subwoofer Output and Level Control
- Selectable Subwoofer Low-Pass Crossover
- 8V MAX Front, Rear, & Subwoofer Outputs
- Low Noise BI-FET Op-Amp for Minimum Distortion
- 20dB Headroom, 30V Bipolar Power Supply
- Blue LED Backlighting
- S/N Ratio 110dB @1V
- THD:0.05%



PWM-20 4-Band 1/2 DIN Equalizer

- 2 Selectable Balanced Inputs
- Variable Stereo Input Sensitivity
- 4 Variable Frequency Bands +/- 18dB Parametric Equalizer
- Independent Volume & Fader Control
- Independent Subwoofer Output and Level Control
- Variable Subwoofer Low-Pass Crossover
- 8V MAX Front, Rear, & Subwoofer Outputs
- Low Noise BI-FET Op-Amp for Minimum Distortion
- 20dB Headroom, 30V Bipolar Power Supply
- Blue LED Backlighting
- Quick Disconnect Wire Harness
- S/N Ratio 115dB @1V
- THD:0.05%



PWM-19 4-Band 1/2 DIN Equalizer

- 2 Selectable Balanced Inputs
- Variable Stereo Input Sensitivity
- 4 bands +/- 18dB Parametric Equalizer
- Independent Volume & Fader Control
- Independent Subwoofer Output and Level Control
- Variable Subwoofer Low-Pass Crossover
- 7V MAX Front, Rear, & Subwoofer Outputs
- Low Noise BI-FET Op-Amp for Minimum Distortion
- 20dB Headroom, 30V Bipolar Power Supply
- Selectable Green/Amber Illumination
- Quick Disconnect Wire Harness
- Under Dash Mounting Hardware Included
- S/N Ratio 110dB @5V
- THD:0.05%



PWM-16 4-Band 1/2 DIN Equalizer

- 2 Selectable Balanced Inputs & Front Panel AUX Input
- 4 bands +/- 18dB Parametric Equalizer
- Independent Volume & Fader Control
- Independent Subwoofer Output and Level Control
- Variable Subwoofer Low-Pass Crossover
- 7V MAX Front, Rear, & Subwoofer Outputs
- Blue LED Backlighting
- Quick Disconnect Wire Harness
- S/N Ratio 80dB @5V
- THD:0.05%

INGENIX SOURCE UNITS

Power Acoustik **INGENIX** powered source units use a proprietary engine featuring 700 MHz CPU processor & WIN CE 5.0 operating system. Commonly found in compact netbooks, such lightning fast function processing has not been possible in an aftermarket automotive multimedia system, until now. **INGENIX** programming brings unique feature applications to your fingertips.




Go ahead, take a second look....

The primary menu of the **INGENIX** source units has an appeal that you might expect only from a computer. The LED back light Full HD quality 800x480 screen resolution yields a crisp image. Drag any mode application icon from the slide menu at the bottom of the screen and drop it onto the desktop as a shortcut. Utilize the drop down widget menu for quick settings access. The main menu background and brightness settings can be set to change automatically at night. There's even a scrolling marquee banner displaying your short message.



Built-in GPS Navigation

All Ingenix powered source units come standard with GPS turn-by-turn navigation for USA & Canada (other countries available). Set your destination and enjoy text-to-speech directions with lane guidance. Additional features include favorites list, programmable home destination, destination fuel estimates, multi-lingual, multi-gender voices, speed limit warnings, and more. Maps and POI data by TomTom.

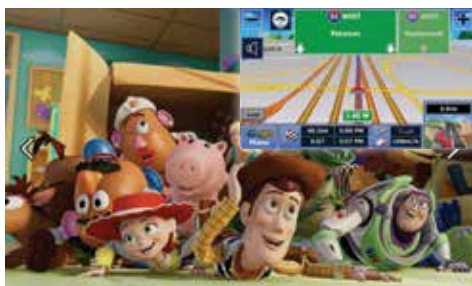

Picture-in-Picture

INGENIX is the first to bring the Picture-in-Picture function into the car. PIP allows uninterrupted video playback while simultaneously viewing the GPS navigation map in real time, as it happens. The picture can be re-sized and positioned to 3 different ratios.



Full iPod Control Integration (requires IP-5C cable)

Scroll through your iPhone, iPod Touch, Classic, or Nano to find your favorite tracks. Search options include by Album, Artist, Genre, Playlist, or entire track list. Jump through lists by first alpha character scrolling.



Bluetooth V2.1 + EDR Connectivity

Bluetooth V2.1 with Enhanced Data Rate increases data transfer rates to 2.1 Mbit/s. This lightning quick information transfer increases clarity & virtually eliminates unwanted distortion during calls and wireless MP3 audio playback. Most Bluetooth enabled Smartphones will transfer phone book contacts, view recent call logs, and stream MP3 audio tracks.



ADDITIONAL FEATURES

- Dual Zone for Rear Seat or Overhead Entertainment
- Adjustable Video Output Screen Ratio & Image Positioning
- Utility Application w/ Memo Pad, Calculator, Calendar, Car Maintenance, Texas Hold 'em Poker, & World Clock
- 4V Front, Rear & Subwoofer Pre-amp Output
- Front Panel 3.5mm AUX A/V Input
- A/V Input from Auxiliary Source
- Rear View Camera RCA Input w/ Trigger

INGENIX



Digital Signal Processing

DSP features include a digital 7-band equalizer w/ 9 factory presets & 3 custom presets, real time analyzer, individual source level adjustment, variable subwoofer level control w/ low pass crossover, and sound staging controls.



32GB SDHC & USB 2.0 Reader

Playback MP3, WAV, FLAC, & AC3 audio files, or MP4, WMV, & XviD video files from up to a 32GB SDHC card or USB 2.0 mass storage device. Artwork transfers from enabled device, if available. INGENIX units will read files from a USB powered portable hard drive, up to 250GB capacity.



Streaming Bluetooth Music (A2DP)

Pair your Bluetooth enabled cell phone, Smartphone, iPhone, or iPod Touch for wireless MP3 playback. Use the touch screen controls for basic operations.



Multimedia File Manager

Sort, view, play, move, or delete your multimedia & data files. No longer will you need a computer on the go to manage your USB/SD/HDD Mass Storage devices.



Speedometer & Compass

Are larger wheels and tires throwing off your speedometer? Can't figure which direction you're driving? Utilize the GPS based real-time speedometer and directional compass to help out. Even set them as the screen saver for constant viewing.

- Accepts Axxess Steering Wheel Interface
- JPG, BMP, & GIF Photo Browser
- Upload Custom Screen Savers
- Remote Control Sold Separately
- Digital & Analog TV Tuners Available
- NTSC/PAL Video Playback
- 50W x 4 MOSFET Speaker Outputs
- 400NIT Panel Brightness

INGENIX SOURCE UNITS

PNX-761

Double Din INGENIX GPS Navigation Source Unit w/ 7" LCD Touch Screen

Motorized 7" LCD Touch Screen w/ Angle Adjustment
 Turn-By-Turn GPS Navigation Powered by TomTom
 Accepts Fahrenheit OEM & Steering Wheel Control Module
 Bluetooth V2.1+EDR Calling from Enabled Phone
 A2DP MP3 Audio Playback from Enabled Device
 Complete iPod Integration with Accessory IP-5C
 Playback from DVDR/RW or CDR/RW of MP3 & MP4More
 Playback From 32GB SD Card or USB of MP3 & MP4More
 AUX A/V Input for Personal Media Devices
 ID3 Tag Reading for Track & Artist Information
 Front, Rear, & Subwoofer 4V Pre-Amp Outputs
 Variable Subwoofer Pre-Amp Output
 Video Output for Auxiliary Devices
 Rear View Camera Input w/ Trigger
 7-Band Custom Digital Signal Processor
 Multi-Region FM Frequency Stepping
 52wx4 MOSFET Speaker Outputs
 800x480 Widescreen Resolution
 400 NIT LED Backlight Brightness



PNX-721

Single Din INGENIX GPS Navigation Source Unit w/ Detachable 7" LCD Touch Screen

Motorized 7" LCD Touch Screen w/ Angle Adjustment
 Theft Deterrent Detachable Faceplate w/ Carry Case
 Turn-By-Turn GPS Navigation Powered by TomTom
 Accepts Fahrenheit OEM & Steering Wheel Control Module
 Bluetooth V2.1+EDR Calling from Enabled Phone
 A2DP MP3 Audio Playback from Enabled Device
 Complete iPod Integration with Accessory IP-5C
 Playback from DVDR/RW or CDR/RW of MP3 & MP4More
 Playback From 32GB SD Card or USB of MP3 & MP4More
 AUX A/V Input for Personal Media Devices
 ID3 Tag Reading for Track & Artist Information
 Front, Rear, & Subwoofer 4V Pre-Amp Outputs
 Variable Subwoofer Pre-Amp Output
 Video Output for Auxiliary Devices
 Rear View Camera Input w/ Trigger
 7-Band Custom Digital Signal Processor
 Multi-Region FM Frequency Stepping
 52wx4 MOSFET Speaker Outputs
 800x480 Widescreen Resolution
 400 NIT LED Backlight Brightness



OEM Upgrade Systems Include:

Complete Ingenix Operating System

Applicable Dash Trim Kit

8" LCD Touch Screen 800x480 Resolution

Naveq Turn-by-Turn GPS Navigation

Bluetooth V2.1+EDR & A2DP for Streaming MP3

Full iPod Integration w/ Touch Screen Control

32GB USB 2.0 & SDHC Reader Module

Touch Screen Control of PADVD-390 DVD Player (not included)

Retains all OEM information, CD playback, RDS, & Climate Control



P-81ACRD

2008~2012 Honda Accord EX/LX



Before

After

P-86OPTM

2011~2012 Kia Optima



After



Before

P-84SNTA11 2011 Hyundai Sonata

P-84SNTA12 2012 Hyundai Sonata



After



Before

P-85ELTR

2011~2012 Hyundai Elantra



After



Before

REM-5

Remote Control for
INGENIX Source Units



IP-5C

Full Control iPod Cable for INGENIX Source Units

Full Control & Charging of iPod Classic, iPhone, Nano, & iTouch

Scroll by Artists, Albums, Genres, or Playlists

Video Playback from Classic & iTouch

Compatible with all Ingenix Powered Source Units Only





MEDIA PLAYER

Play audio, video, and picture files through Inteq from a 32GB SD card or USB flash drive. Supports MP3, WAV & FLAC audio files, MP4, MKV, FLV, & MOV video files, and JPG pictures.



DRAG-N-DROP WIDGET MENU

Place mode application icons on the desktop from the widget menu for quick short-cuts. Any mode or settings menus can drag-n-drop from the widget menu.



PROGRAMMABLE FM/AM TUNER

Inteqs FM/AM receiver allows 18FM station memory and 12AM stations. Recall any favorite station with one simple touch.



INTERFACE FOR IPOD

Control and charge your iPod or iPhone via Inteq's touch screen for hours of audio & video entertainment. Scroll through and select individual tracks and Playlists, or search by Artist, Album or Genre. Requires IC-3, sold separately.



READY FOR GPS NAVIGATION

All Inteq source units are ready for GPS turn-by-turn navigation via NAVIBOX-2, powered by Navteq (sold separately). Set your destination to one of 12 million USA & Canada Points of Interest. Additional features include programmable destinations & selectable languages.



DIGITAL MEDIA DRIVE

Enjoy your favorite DVD rental, or playback your own MP3/WAV audio tracks and MP4/DiviX videos from any DVDR/RW or CDR/RW disc with Inteq's Digital Media Drive.

Made for
iPod iPhone



HANDS-FREE CALLING & MEDIA PLAYBACK WITH BLUETOOTH V2.1+EDR

Bluetooth V2.1 with Enhanced Data Rate increases data transfer rates to 2.1 Mbit/s. This lightning quick information transfer increases clarity & virtually eliminates unwanted distortion during calls and wireless MP3 audio playback. Most Bluetooth enabled Smartphones will transfer phone book contacts, view recent call logs, and stream MP3 audio tracks.

PD-931NB

PD-931NBT (w/ Analog TV Tuner)

Single DIN Inteq Multimedia Source Unit w/ Detachable 9.3" LCD Touch Screen

Motorized 9.3" LCD Touchscreen w/ Angle Adjustment
 Theft Deterrent Detachable Faceplate w/ Carry Case
 Standard & Extended Install Sleeve & Trim Ring Included
 iGlass Touch Screen Technology LCD Panel
 Ready for GPS Navigation w/ NAVIBOX-2
 Accepts Fahrenheit OEM & Steering Wheel Control Module
 Accepts Optional KS-1 Desktop Media Player
 Bluetooth V2.1+EDR Hands-Free Calling from Enabled Phone
 A2DP Wireless MP3 Audio Playback from Enabled Device
 Complete iPod Integration with Accessory IC-3
 Playback from DVDR/RW or CDR/RW of MP3 & MP4
 Playback From 32GB SD Card or USB of MP3 & MP4
 ID3 MP3 Tag Reading for Track & Artist Information
 AUX A/V Input for Personal Media Devices
 90° Angled AUX-In & USB Adapter Included
 Video Output for Auxiliary Devices
 Front & Rear Pre-Amp Audio Outputs
 Variable Subwoofer Pre-Amp Output
 Rear View Camera Input w/ Trigger
 52wx4 MOSFET Speaker Outputs
 Multi-Region FM Frequency Stepping
 800x480 Widescreen Resolution
 400NIT LED Backlight



NAVIBOX-2

Plug-N-Play Turn-By-Turn GPS Navigation Module

Works with all Inteq Powered Source Units
 Commanded by Source Unit Touch Screen Controls
 Navteq USA & Canada Mapping w/ 12 Million POI Database
 Windows CE 5.0 Operating System
 500MHz Atlas Processor for Immediate Calculation
 Navigate to Destinations by Address, POI Search, or Favorites List
 Programmable Home and Office Destinations
 Choice of Quickest or Shortest Route
 Remaining Time & Distance to Location Calculation
 Metric or USA Units of Measure
 Text-To-Speech for Most Major Highways
 Multi-Language & Male, Female, Southern & Urban Accents
 2D & 3D Visual Configurations
 Automatic Day & Night Illumination
 Dimensions: 4.1" x 4.2" x 1"



NAVTEQ
ON BOARD

KS-1

Desktop Media Player for Select Inteq Models

KS-1 is a desktop media player dock for select Inteq source units. Your Inteq source unit faceplate docks with KS-1, activating the SD & USB playback functions. Sound is produced by built-in rear panel speakers or via earphone output, while videos are displayed on-screen. A built-in kickstand with adjustable positioning allows for easy angled viewing. AC power adapter included.



IC-3

Full Function iPod Integration Cable

Full Control & Charging of all Generation iPod Classic, Nano, & Touch
 Scroll by Artists, Albums, Genres, or Playlists
 Video Playback from Classic & iTouch
 Compatible with All Inteq Powered Source Units Only





SOURCE UNITS



Smart Control

SmartControl enables select Mobile 8 models to communicate with the media player of most smartphones and tablets. SmartControl sends playback commands by the AUX cable connected to the headphone output of your smart device. Control track selection, play/pause, and even answer incoming calls. AUX cable included.

Digital Media Player

Play audio, video, and picture files through Mobile 8 from DVD, CD, or 32GB SD/USB flash drive. Supports MP3 & WAV audio files & MP4 video files, and JPG pictures.



Mobile Link

Mobile Link opens full imaging between smartphones and tablets to enabled in-car entertainment systems. Safely share videos, pictures, and all other content on your mobile device with passengers. Mobile Link replicates the image of your smart device onto the LCD screen of several in-car entertainment products, including select Mobile 8 source units, headrests, and overhead displays. Mobile Link integration cables are available for select Android and iOS smart devices.

Hands-Free Calling & Media Playback with Bluetooth V2.0

Safely make and receive hands-free phone calls, scroll contacts lists, and stream MP3's via A2DP from your enabled Smartphone. Most Bluetooth enabled Smartphones seamlessly pair with Mobile 8, without surfing through multiple settings menus or entering random passcodes.



PD-103B

Single DIN Multimedia Source Unit w/
Detachable 10.3" LCD Touch Screen

Motorized 10.3" LCD Touchscreen w/ Angle Adjustment
Theft Deterrent Detachable Faceplate w/ Carry Case
Standard & Extended Installation Sleeve & Trim Ring Included
iGlass Low Glare Anti-Reflection LCD Touch Screen Technology
Accepts Fahrenheit OEM & Steering Wheel Control Interface
Bluetooth V2.0 Hands Free Calling From Enabled Devices
A2DP Wireless MP3 Audio Playback From Enabled Devices
Playback from DVD & CD of MP3 & MP4
Playback from 32GB SD/USB of MP3 & MP4
ID3 MP3 Tag Reading for Track & Artist Information
AUX A/V Input for Personal Media Devices
90° Angle USB & AUX A/V Input Cable Included
Front & Rear Pre-Amp Audio Outputs
Variable Subwoofer Pre-Amp Output
Video Output for Auxiliary Devices
Rear View Camera Input w/ Trigger
52w x 4 MOSFET Speaker Outputs
Custom & Preset Equalizer Settings
Multi-Region FM Frequency Stepping
1,024x600 High Definition Widescreen Resolution
400 NIT Energy Efficient LED Display Backlight



NEW 



PD-930B

PD-930BT (w/ Analog TV Tuner)

Single DIN Multimedia Source Unit w/ Detachable 9.3" LCD Touch Screen

Motorized 9.3" LCD Touchscreen w/ Angle Adjustment
Theft Deterrent Detachable Faceplate w/ Carry Case
Standard & Extended Installation Sleeve & Trim Ring Included
iGlass Low Glare Anti-Reflection LCD Touch Screen Technology
Accepts Fahrenheit OEM & Steering Wheel Control Interface
Bluetooth V2.0 Hands Free Calling From Enabled Devices
A2DP Wireless MP3 Audio Playback From Enabled Devices
Playback from DVD & CD of MP3 & MP4
Playback from 32GB SD/USB of MP3 & MP4
ID3 MP3 Tag Reading for Track & Artist Information
AUX A/V Input for Personal Media Devices
90° Angle USB & AUX A/V Input Cable Included
Front & Rear Pre-Amp Audio Outputs
Variable Subwoofer Pre-Amp Output
Video Output for Auxiliary Devices
Rear View Camera Input w/ Trigger
52w x 4 MOSFET Speaker Outputs
Custom & Preset Equalizer Settings
Multi-Region FM Frequency Stepping
800x480 High Definition Widescreen Resolution
400 NIT Energy Efficient LED Display Backlight



NEW 



SOURCE UNITS

PD-620HB

Double DIN Mobile 8 Multimedia Source Unit w/ 6.2" LCD & Mobile Link MHL Input

2-DIN Multimedia Receiver w/ 6.2" LCD Touch Screen
MobileLink Input for Smart Device Connectivity
Accepts Fahrenheit Steering Wheel Control Module DRC-1
Bluetooth V2.0 Hands Free Calling From Enabled Devices
A2DP Wireless MP3 Audio Playback From Enabled Devices
Playback from DVD & CD of MP3 & MP4
Playback from 32GB SD/USB of MP3 & MP4
ID3 MP3 Tag Reading for Track & Artist Information
AUX A/V Input for Personal Media Devices
Front & Rear Pre-Amp Audio Outputs
Video Output for Auxiliary Devices
Rear View Camera Input w/ Trigger
52w x 4 MOSFET Speaker Outputs
Custom & Preset Equalizer Settings
Multi-Region FM Frequency Stepping
800x480 Widescreen Resolution
400 NIT Energy Efficient LED Display Backlight



NEW

PD-720HB

Single Din Mobile 8 Multimedia Source Unit w/ 7" LCD Touch Screen & Mobile Link MHL Input

1-DIN Multimedia Receiver w/ Motorized 7" LCD Touch Screen
Theft Deterrent Detachable Faceplate w/ Carry Case
MobileLink Input for Smart Device Connectivity
Accepts Fahrenheit Steering Wheel Control Module DRC-1
Bluetooth V2.0 Hands Free Calling From Enabled Devices
A2DP Wireless MP3 Audio Playback From Enabled Devices
Playback from DVD & CD of MP3 & MP4
Playback from 32GB SD/USB of MP3 & MP4
ID3 MP3 Tag Reading for Track & Artist Information
AUX A/V Input for Personal Media Devices
Front & Rear Pre-Amp Audio Outputs
Video Output for Auxiliary Devices
Rear View Camera Input w/ Trigger
52w x 4 MOSFET Speaker Outputs
Custom & Preset Equalizer Settings
Multi-Region FM Frequency Stepping
800x480 Widescreen Resolution
400 NIT Energy Efficient LED Display Backlight



NEW



Mobile LINK MHL Interface Cables

HDM-i4 ~ iPhone4, iPhone4S, iPad2, & iPad3

HDM-A2 ~ Galaxy 2 & Select 5-Pin Android Devices

HDM-A3 ~ Galaxy 3, 4, & Select 11-PIN Android Devices

5ft interface cable unlocks 1080p video and audio playback from MHL enabled appropriate micro connector for your mobile device. Fahrenheit MobileLink MHL interface cables also charge your mobile device. Available for select iOS and Android devices.



SOURCE UNITS



PD-701

PD-701B (w/ Bluetooth V2.0)

PD-701BT (w/ Bluetooth V2.0 & Analog TV Tuner)

Single Din Mobile 8 Multimedia Source Unit w/
7" Flip-Up LCD Touch Screen

1-DIN Multimedia Receiver w/ Motorized 7" LCD Touch Screen
Theft Deterrent Detachable Faceplate w/ Carry Case
Accepts Fahrenheit OEM & Steering Wheel Control Interface
Bluetooth V2.0 Hands Free Calling From Enabled Devices
A2DP Wireless MP3 Audio Playback From Enabled Devices
Smart Control for Mobile Device Integration (701 & 701T only)
Playback from DVD & CD of MP3 & MP4
Playback from 32GB SD/USB of MP3 & MP4
ID3 MP3 Tag Reading for Track & Artist Information
AUX A/V Input for Personal Media Devices
Front & Rear Pre-Amp Audio Outputs
Variable Subwoofer Pre-Amp Output
Video Output for Auxiliary Devices
Rear View Camera Input w/ Trigger
52w x 4 MOSFET Speaker Outputs
Custom & Preset Equalizer Settings
Multi-Region FM Frequency Stepping
480x234 Widescreen Resolution
400 NIT Energy Efficient LED Display Backlight



NEW



PD-712

PD-712T (w/ Analog TV Tuner)

PD-712B (w/ Bluetooth V2.0)

PD-712BT (w/ Bluetooth V2.0 & Analog TV Tuner)

Single Din Mobile 8 Multimedia Source Unit w/ Motorized Detachable 7" LCD Touch Screen



Motorized 7" LCD Touch Screen w/ Angle Adjustment
Theft Deterrent Detachable Faceplate w/ Carry Case
Standard & Extended Install Sleeve and Trim Ring Included
Accepts Fahrenheit OEM & Steering Wheel Control Interface
Bluetooth V2.0 Hands Free Calling From Enabled Devices
A2DP Wireless MP3 Audio Playback From Enabled Devices
Smart Control for Mobile Device Integration (701 & 701T only)
Playback from DVD & CD of MP3 & MP4
Playback from 32GB SD/USB of MP3 & MP4
ID3 MP3 Tag Reading for Track & Artist Information
AUX A/V Input for Personal Media Devices
90° Angle USB & AUX A/V Input Cable Included
Front & Rear Pre-Amp Audio Outputs
Variable Subwoofer Pre-Amp Output
Video Output for Auxiliary Devices
Rear View Camera Input w/ Trigger
52w x 4 MOSFET Speaker Outputs
Custom & Preset Equalizer Settings
Multi-Region FM Frequency Stepping
800x480 Widescreen Resolution
400 NIT Energy Efficient LED Display Backlight



NEW



POWER ACoustik®

SOURCE UNITS

PD-650

PD-650B (w/ Bluetooth V2.0)

Double DIN Multimedia Source Unit w/ Motorized 6.5" LCD Touch Screen

2-DIN Multimedia Receiver w/ Motorized 6.5" LCD Touch Screen
 Accepts Fahrenheit OEM & Steering Wheel Control Interface
 Bluetooth V2.0 Hands Free Calling From Enabled Devices
 A2DP Wireless MP3 Audio Playback From Enabled Devices
 Playback from DVD & CD of MP3 & MP4
 Playback from 32GB SD/USB of MP3 & MP4
 ID3 MP3 Tag Reading for Track & Artist Information
 AUX A/V Input for Personal Media Devices
 Dual Zone for Rear Seat or Overhead Entertainment
 Front & Rear Pre-Amp Audio Outputs
 Fixed 80Hz Subwoofer Output
 Video Output for Auxiliary Devices
 Rear View Camera Input w/ Trigger
 52w x 4 MOSFET Speaker Outputs
 Custom & Preset Equalizer Settings
 Multi-Region FM Frequency Stepping
 480x243 Widescreen Resolution
 400 NIT LED Brightness



PTID-8920

PTID-8920B (w/ Bluetooth V2.0)

PTID-8920T (w/ Analog TV Tuner)

PTID-8920BT (w/ Bluetooth V2.0 & Analog TV Tuner)

Single Din Multimedia Source Unit w/ 7" Flip-Up LCD Touch Screen



1-DIN Multimedia Receiver w/ Motorized 7" LCD Touch Screen
 Theft Deterrent Detachable Faceplate w/ Carry Case
 Accepts Fahrenheit OEM & Steering Wheel Control Interface
 Bluetooth V2.0 Hands Free Calling From Enabled Devices
 A2DP Wireless MP3 Audio Playback From Enabled Devices
 Playback from DVD & CD of MP3 & MP4
 Playback from 32GB SD/USB of MP3 & MP4
 ID3 MP3 Tag Reading for Track & Artist Information
 AUX A/V Input for Personal Media Devices
 Programable Open or Closed Positioning After Use
 Front & Rear Pre-Amp Audio Outputs
 Fixed 80Hz Subwoofer Output
 Video Output for Auxiliary Devices
 Rear View Camera Input w/ Trigger
 52w x 4 MOSFET Speaker Outputs
 Custom & Preset Equalizer Settings
 Multi-Region FM Frequency Stepping
 480x272 Widescreen Resolution
 400 NIT LED Brightness



SOURCE UNITS

PD-710

PD-710T (w/ Analog TV Tuner)

PD-710B (w/ Bluetooth V2.0)

PD-710BT (w/ Bluetooth V2.0 & Analog TV Tuner)

Single Din Multimedia Source Unit w/ Detachable 7" LCD Touch Screen



1-DIN Multimedia Receiver w/ 7" LCD Touch Screen
Theft Deterrent Detachable Faceplate w/ Carry Case
Standard & Extended Installation Sleeve and Trim Ring Included
Bluetooth V2.0 Hands Free Calling From Enabled Devices
A2DP Wireless MP3 Audio Playback From Enabled Devices
Playback from DVD & CD of MP3 & MP4
Playback from 32GB SD/USB of MP3 & MP4
ID3 MP3 Tag Reading for Track & Artist Information
AUX A/V Input for Personal Media Devices
Front & Rear Pre-Amp Audio Outputs
Fixed 80Hz Subwoofer Output
Video Output for Auxiliary Devices
Rear View Camera Input w/ Trigger
52w x 4 MOSFET Speaker Outputs
Custom & Preset Equalizer Settings
Multi-Region FM Frequency Stepping
480x243 Widescreen Resolution
400 NIT Energy Efficient LED Display Backlight



PD-450

PD-450T (w/ Analog TV Tuner)

Single DIN A/V Source Unit w/ Detachable 4.5" LCD Touch Screen

1-DIN Multimedia Receiver w/ 4.5" LCD Touch Screen
Theft Deterrent Detachable Faceplate w/ Carry Case
Playback from DVD & CD of MP3 & MP4
Playback from 32GB SD/USB of MP3 & MP4
ID3 MP3 Tag Reading for Track & Artist Information
AUX A/V Input for Personal Media Devices
Front & Rear Pre-Amp Audio Outputs
Fixed 80Hz Subwoofer Output
Video Output for Auxiliary Devices
Rear View Camera Input w/ Trigger
52w x 4 MOSFET Speaker Outputs
Custom & Preset Equalizer Settings
Multi-Region FM Frequency Stepping
480x243 Widescreen Resolution
400 NIT Energy Efficient LED Display Backlight



PD-344

PD-344B (w/ Bluetooth V2.0) **NEW**


PD-344T (w/ Analog TV Tuner)

Single DIN A/V Source Unit w/ Detachable 3.4" LCD Screen

1-DIN Multimedia Receiver w/ High Definition 3.4" LCD Display
Theft Deterrent Detachable Faceplate w/ Carry Case
Bluetooth V2.0 Hands Free Calling From Enabled Devices
A2DP Wireless MP3 Audio Playback From Enabled Devices
Playback from DVD & CD of MP3 & MP4
Playback from 32GB SD/USB of MP3 & MP4
MP3 ID3 Tag Reading of MP3 Files
AUX A/V Input for Personal Media Devices
Dual Zone for Rear Seat or Overhead Entertainment
Front & Rear Pre-Amp Audio Outputs
Video Output for Auxiliary Devices
Rear View Camera Input w/ Trigger
52w x 4 MOSFET Speaker Outputs
Custom & Preset Equalizer Settings
Multi-Region FM Frequency Stepping
720x420 high Definition Widescreen Resolution
400 NIT Energy Efficient LED Display Backlight



DIGITAL MEDIA RECEIVERS

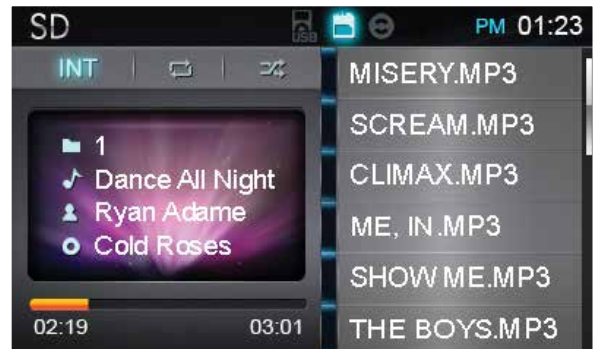


Media Player

Play audio, video, and picture files from a 32GB SD card or USB flash drive. Supports MP3 & WAV audio files; MP4, & AVI video files. Also features a .JPG picture viewer.



Programmable FM/AM Tuner

The FM/AM receiver of all DMRs allow 18FM station memory and 12AM stations. Recall your favorite station with a simple press of a button or knob turn.

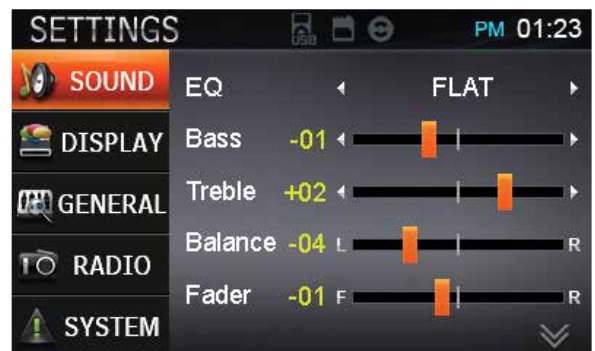

Digital Signal Processing

DSP features include a digital 2-band equalizer w/ 7 factory presets, a custom preset, and sound staging controls. Each DMR offers Low Level RCA audio outputs.

PDR-654

Double DIN Digital Media Receiver w/ 6.5" LCD Touch Screen



2-DIN Digital Media Receiver w/ 6.5" LCD Touch Screen
 Playback from 32GB SD/USB of MP3 & MP4
 720p HD Video Playback of MP4, AVI & More
 Audio Playback of MP3, AAC, AC3, & WMA
 Picture Viewer of JPEG, PNG & GIF
 ID3 Tag Reading for Track & Artist Information
 AUX A/V Input for Personal Media Devices
 18 FM / 12 AM Station Memory
 52w x 4 MOSFET Powered Speaker Level Outputs
 Front & Rear Pre-Amp Audio Outputs
 Fixed 80Hz Subwoofer Output
 Custom Audio Staging & EQ Controls
 Multi-Region FM/AM Frequency Stepping
 400x240 HD Resolution w/ 400cd/m2 Brightness
 4" Mounting Depth



PDR-780

PDR-780T (w/ Analog TV Tuner)

Single DIN Digital Media Receiver w/ 7" LCD Touch Screen

- 1-DIN Digital Media Receiver w/ Motorized 7" LCD Touch Screen
- Theft Deterrent Detachable Faceplate w/ Protective Carry Case
- Accepts Fahrenheit OEM & Steering Wheel Control Interface
- Playback from 32GB SD/USB of MP3 & MP4
- 720p HD Video Playback of MP4, AVI & More
- Audio Playback of MP3, AAC, AC3, & WMA
- Picture Viewer of JPEG, PNG & GIF
- ID3 Tag Reading for Track & Artist Information
- AUX Audio Input for Personal Media Devices
- 18 FM / 12 AM Station Memory
- 52w x 4 MOSFET Powered Speaker Level Outputs
- Front & Rear Pre-Amp Audio Outputs
- Fixed 80Hz Subwoofer Output
- Video Output for Auxiliary Devices (PDR-780T only)
- Rear View Camera Input w/ Trigger (PDR-780T only)
- Custom Audio Staging & EQ Controls
- Multi-Region FM/AM Frequency Stepping
- 800x480 HD Resolution w/ 400cd/m2 Brightness
- 4" Mounting Depth

PDR-760

PDR-760T (w/ Analog TV Tuner)

Single DIN Digital Media Receiver w/ Detachable 7" LCD Touch Screen

- 1-DIN Digital Media Receiver w/ 7" LCD Touch Screen
- Theft Deterrent Detachable Faceplate w/ Carry Case
- Playback from 32GB SD/USB of MP3 & MP4
- 720p HD Video Playback of MP4, AVI & More
- Audio Playback of MP3, AAC, AC3, & WMA
- Picture Viewer of JPEG, PNG & GIF
- ID3 Tag Reading for Track & Artist Information
- AUX Audio Input for Personal Media Devices
- 18 FM / 12 AM Station Memory
- 52w x 4 MOSFET Powered Speaker Level Outputs
- 1 Set of Low-Level RCA Audio Outputs
- Video Output for Auxiliary Devices (PDR-760T only)
- Rear View Camera Input w/ Trigger (PDR-760T only)
- Custom Audio Staging & EQ Controls
- Multi-Region FM/AM Frequency Stepping
- 800x480 HD Resolution w/ 400cd/m2 Brightness
- 4" Mounting Depth

PDR-340

PDR-340T (w/ Analog TV Tuner)

Single DIN Digital Media Receiver w/ Detachable 3.4" LCD Screen



- 1-DIN Digital Media Receiver w/ High Definition 3.4" LCD Display
- Theft Deterrent Detachable Flip-Down Front Faceplate
- Playback from up to 32GB SD/USB of 720P MP4, AVI, & more
- Audio Playback of MP3, AAC, AC3, & WMA
- Picture Viewer of JPEG, PNG & GIF
- ID3 Tag Reading for Track & Artist Information
- AUX Audio Input for Personal Media Devices
- 18 FM / 12 AM Station Memory
- 52w x 4 MOSFET Powered Speaker Level Outputs
- 1 Set of Low-Level RCA Audio Outputs
- Video Output for Auxiliary Devices (PDR-340T only)
- Rear View Camera Input w/ Trigger (PDR-340T only)
- Custom Audio Staging & EQ Controls
- Multi-Region FM/AM Frequency Stepping
- 720x420 HD Resolution w/ 400cd/m2 Brightness
- 4" Mounting Depth

SOURCE UNITS

AC-1

Wireless Mobile Link MHL Receiver



Wirelessly Stream Video & Content From Your Smart Device

Compatible w/ DLNA, Miracast, AirPlay, and AllShare Smart Devices

Connect to any Headrest, Overhead, or Source Unit w/ Mobile Link Input

Streams Full 1080P Video, including MP4, AVI, WMV, MKV, MOV, & More

Universal Application w/ Most LCD TVs at Home or Office.

NEW

UMHL-1

Universal Mobile Link MHL Receiver

Share Video and Content from Your Mobile Device to In-Car Entertainment Systems by Replicating the Image of Your Smart Device.

Connect to any Headrest, Overhead, or Source Unit via RCA/AV Outputs.

Interface Cable for First & Second Generation Android Devices Included

Compatible w/ iOS Devices, Requires iOS Interface Cable.

Universal Application w/ Most LCD TVs at Home or Office w/ RCA/AV Input.



NEW



PCD-42

PCD-42B (w/ Bluetooth V2.0)

Double DIN CD/MP3, AM/FM Receiver w/ 32GB USB Playback



NEW

CD/MP3, AM/FM & USB Receiver
Bluetooth V2.0 Hands Free Calling from Enabled Phone
A2DP MP3 Audio Playback from Enabled Device
Playback from 32GB USB of MP3 & WMA
Playback from CD, CDR, CDRW of MP3 & WMA
Aux Audio Input for Personal Media Devices
Front & Rear Pre-Amp Output
52w x 4 MOSFET Speaker Outputs
Custom & Pre-Set Equalizer Settings
Audio Staging Controls
12/24 Hour Digital Clock
Remote Control Included



PCD-41

PCD-41B (w/ Bluetooth V2.0)

Single DIN DVD Player w/32GB USB Playback



NEW

CD/MP3, AM/FM & USB Receiver
Theft Deterrent Detachable Faceplate
Bluetooth V2.0 Hands Free Calling from Enabled Phone
A2DP MP3 Audio Playback from Enabled Device
Playback from 32GB USB of MP3 & WMA
Playback from CD, CDR, CDRW of MP3 & WMA
Aux Audio Input for Personal Media Devices
Front & Rear Pre-Amp Output
52w x 4 MOSFET Speaker Outputs
Custom & Pre-Set Equalizer Settings
Audio Staging Controls
12/24 Hour Digital Clock
Remote Control Included
Faceplate Carry Case Included



PADVD-390

Single DIN DVD Player w/32GB SD/USB Playback

Playback from DVDR/RW of MP4 &
 Playback from 32GB USB of MP4, &
 In-Dash, Floor, & Vertical Mounting Brackets Included
 DIN Size Trim Ring For In-Dash Mounting Included
 Flash Memory for Last Position Recall
 Remote Control & IR Repeater Included
 OSD On Screen Display
 Digital Anti-shock
 A/V Pre-amp Outputs, 2V
 Dimensions: 6.4" x 6.2" x 2"



PL-11B (w/ Bluetooth V2.0)

Single DIN Digital Media Receiver w/ 32GB SD/USB Playback & AM/FM Receiver



NEW



Detachable Theft Deterrent Front Panel Faceplate
 Bluetooth V2.0 Hands Free Calling from Enabled Phone
 A2DP MP3 Audio Playback from Enabled Device
 Playback from 32GB SD & USB of MP3, WAV, WMA
 Front Panel 3.5mm AUX Audio Input
 2-Channel 2V Pre-Amp RCA Audio Outputs
 52wx4 MOSFET Powered Speaker Level Outputs
 18FM/12AM Station Memory
 Custom & Preset EQ Settings
 Audio Staging Controls
 Remote Control Included

PL-10A

Single DIN Digital Media Receiver w/ 32GB SD/USB Playback & AM/FM Receiver



Detachable Theft Deterrent Front Panel Faceplate
 Playback from 32GB SD & USB of MP3, WAV, WMA
 Front Panel 3.5mm AUX Audio Input
 2-Channel 2V Pre-Amp RCA Audio Outputs
 52wx4 MOSFET Powered Speaker Level Outputs
 18FM/12AM Station Memory
 Custom & Preset EQ Settings
 Audio Staging Controls
 Remote Control Included

AFTERMARKET OEM INTEGRATION

OEM in-vehicle technologies have advanced significantly in recent years. As more vehicles land on showroom floors with advanced network systems, the ability to integrate aftermarket source units has become essential. Power Acoustik is excited to partner with Farenheit and introduce its series of aftermarket OEM integration modules and universal steering wheel control interface. Communication, safety, and convenience features that otherwise would be lost are retained while enjoying added aftermarket entertainment. All modules are pre-fitted with Power Acoustik source unit and vehicle make/model specific wire harnesses, creating plug-n-play installation for all Ingenix, Inteq, Mobile 8 & multimedia receivers. Visit PowerAcoustik.com for complete vehicle application guides.



DRC-1
GM-2
GM-2DRC
GM-20S
GM-11
GM-110S
GM-29
GM-290S
CH-1
TOY-1
FRD-1
VW-1

Universal steering wheel control interface for select GM, Chrysler, Ford & Toyota vehicles
Select 2000-2009 General Motors vehicles w/ Class 2 data system
Select 2000-2009 General Motors vehicles w/ Class 2 data system & Steering Wheel Control
Select 2000-2009 General Motors vehicles w/ Class 2 data system & OnStar
Select 2005-2009 General Motors vehicles w/ LAN 11-bit data system
Select 2005-2009 General Motors vehicles w/ LAN 11-bit data system & OnStar
Select 2006-2013 General Motors vehicles w/ LAN 29-bit data system
Select 2006-2013 General Motors vehicles w/ LAN 29-bit data system & OnStar
Select 2007-2013 Chrysler, Dodge, & Jeep vehicles w/ premium entertainment system
Select 2004-2011 Toyota & Lexus vehicles w/ premium entertainment system
Select 2007-2012 Ford, Lincoln, & Mercury vehicles w/ CAN Bus system
Select 2002-2013 Volkswagen vehicles w/ premium entertainment system

OVERHEAD DVD SOLUTIONS

PMD-143H

Ceiling Mount DVD Entertainment System w/ High Definition 14.3" LCD & MobileLink MHL Input

Interchangeable Color Skins (beige, black, grey)
 Car-Spec DVD Drive for Extreme Temperature Exposure
 MobileLink Input for Smart Device Connectivity
 Playback from DVDR/RW of 720p MP4
 Playback from 32GB SD Card or USB of 720p MP4
 Flash Memory for Last Position Recall
 Single Channel Wireless IR Transmitter (use HP-10S, HP-11S)
 8-ch FM Stereo Transmitter for OEM Integration
 RCA A/V Input for Auxiliary Sources
 RCA A/V Output for Multiple Component Integration
 Triggered Bright White LED Dome Light
 NTSC / PAL Auto Selection
 1,366 x 768 16:9 Widescreen Resolution
 400 NIT Screen Brightness
 Dimensions: 12.75" w x 7.5" d x 2" h



Mobile LINK MHL Interface Cables

HDM-i4 ~ iPhone4, iPhone4S, iPad2, & iPad3

HDM-A2 ~ Galaxy 2 & Select 5-Pin Android Devices

HDM-A3 ~ Galaxy 3, 4, & Select 11-PIN Android Devices

5ft interface cable unlocks 1080p video and audio playback from MHL enabled appropriate micro connector for your mobile device. Fahrenheit MobileLink MHL interface cables also charge your mobile device. Available for select iOS and Android devices.



NEW

PMD-121CMX

Ceiling Mount DVD Entertainment System w/ 12.1" LCD

Interchangeable Color Skins (beige, black, grey)
 Color Matched Trim Rings for Sculptured Ceilings Included
 Car-Spec DVS DVD Drive for Extreme Temperature Exposure
 Playback from DVDR/RW of 720p MP4
 Playback from 32GB SD Card or USB of 720p MP4
 Flash Memory for Last Position Recall
 Single Channel Wireless IR Transmitter (use HP-10S, HP-11S)
 8-ch FM Stereo Transmitter for OEM Integration
 A/V Inputs for Auxiliary Sources
 Rear Panel RCA A/V Input for Game Console
 A/V Output for Multiple Component Integration
 Rear Panel Play/Pause Control
 Triggered Bright White LED Dome Light
 NTSC / PAL Auto Selection
 800 x 600 4:3 Fullscreen Resolution
 400 NIT Screen Brightness
 Dimensions: 14.5" w x 13.75" d x 2.5" h




POWER ACOUSTIK®

OVERHEAD DVD SOLUTIONS

PMD-112CMX

Ceiling Mount DVD Entertainment System w/ 11.2" LCD

Interchangeable Color Skins (beige, black, grey)
 Color Matched Trim Rings for Sculptured Ceilings Included
 45°/45° Swivel Screen for Angled Viewing
 Car-Spec DVS DVD Drive for Extreme Temperature Exposure
 Playback from DVDR/RW of 720p MP4
 Playback from 32GB SD Card or USB of 720p MP4
 Flash Memory for Last Position Recall
 Single Channel Wireless IR Transmitter (use HP-10S, HP-11S)
 8-ch FM Stereo Transmitter for OEM Integration]
 A/V Input for Auxiliary Sources
 Rear Panel RCA A/V Input for Game Console
 A/V Output for Multiple Component Integration
 Rear Panel Play/Pause Control
 Triggered Bright White LED Dome Light
 Full Function Remote Control Included
 NTSC / PAL Auto Selection
 800 x 480 16:9 Widescreen Resolution
 400 NIT Screen Brightness
 Dimensions: 14"w x 12.5"d x 2.5"h

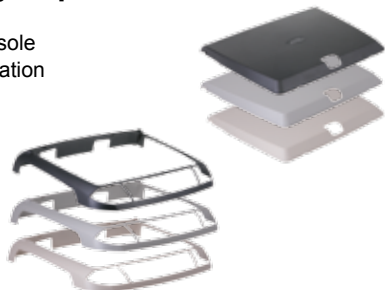

PMD-104X

Ceiling Mount DVD Entertainment System w/ 10.3" LCD

10.3" High Resolution LCD Screen
 1,024 x 600 16:9 Widescreen Resolution
 Interchangeable Color Skins (beige, black, grey)
 Automotive-Spec DVD Transport for Extreme Conditions
 Playback from DVDR/RW of MP4 & AVI
 Playback from 32GB SD/MMC or USB of 1080p MP4, AVI, or
 RCA A/V Input from Auxiliary Sources
 Rear Panel RCA A/V Input from Game Console
 Pre-Amp Audio Outputs
 Single Channel Wireless IR Transmitter (use HP-10S or HP-11S)
 330 Ch. FM Stereo Transmitter for OEM Integration
 Full Function Remote Control Included
 NTSC / PAL Auto Selection
 400 NIT Screen Brightness
 Dimensions: 13"w x 11"d x 2.5"h




NEW 



PMD-102X

Ceiling Mount DVD Entertainment System w/ 10.2" LCD



Interchangeable Color Skins (beige, black, grey)
 45°/270° Swivel Screen for Angled Viewing
 Playback from DVDR/RW of 720p MP4
 Playback from 32GB USB of 720p MP4
 Flash Memory for Last Position Recall
 FM Stereo Transmitter for OEM Integration
 Single Channel Wireless IR Transmitter (use HP-10S, HP-11S)
 A/V Output for Multiple Component Integration
 A/V Inputs for Auxiliary Sources
 Rear Panel RCA A/V Input for Game Console
 Rear Panel Play/Pause Control
 Triggered Bright White LED Dome Light
 Full Function Remote Control Included
 NTSC / PAL Auto Selection
 1,024x600 16:9 Widescreen Resolution
 400 NIT Screen Brightness
 Dimensions: 11.5" w x 11" d x 2.5" h

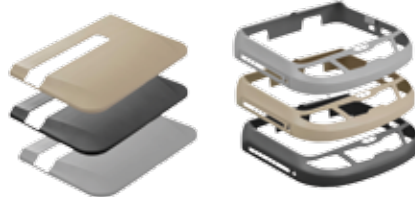

PMD-90CM

Ceiling Mount DVD Entertainment System w/ 9" LCD

Interchangeable Color Skins (beige, black, grey)
 Color Matched Trim Ring for Sculptured Ceiling Included
 45°/45° Swivel Screen for Angled Viewing
 Car-Spec DVS DVD Drive for Extreme Temperature Exposure
 Playback from DVDR/RW of 720p MP4
 Playback from 32GB SD Card or USB of 720p MP4
 Flash Memory for Last Position Recall
 Single Channel Wireless IR Transmitter (use HP-10S, HP-11S)
 8-ch FM Stereo Transmitter for OEM Integration
 A/V Input for Auxiliary Sources
 Rear Panel RCA A/V Input for Game Console
 A/V Output for Multiple Component Integration
 Triggered Bright White LED Dome Light
 Rear Panel Play/Pause Control
 NTSC / PAL Auto Selection
 800 x 480 16:9 Widescreen Resolution
 400 NIT Screen Brightness
 Dimensions: 11" w x 9.75" d x 2.5" h



PT-151CM

Ceiling Mount 15.2" LCD Monitor

Low Reflection TFT-LCD Monitor
 2 RCA A/V Inputs for Auxiliary Source
 Single Channel Wireless IR Transmitter (use HP-10S, HP-11S)
 NTSC / PAL Auto Selection
 1,024 x 768 4:3 Fullscreen Resolution
 400 NIT Screen Brightness
 Dimensions: 15.75" w x 14.75" d x 2" h





OVERHEAD LCD MONITORS

PT-143CM

Ceiling Mount 14.3" LCD Monitor

Interchangeable Color Skins (beige, black, grey)
 Single Channel Wireless IR Transmitter (use HP-10S, HP-11S)
 2 RCA A/V Input for Auxiliary Sources
 Triggered Bright White LED Dome Light
 NTSC / PAL Auto Selection
 1,366 x 768 16:9 Widescreen Resolution
 400 NIT Screen Brightness
 Dimensions: 12.75" w x 7.5" d x 2" h





NEW



PT-110CM

Ceiling Mount 11.2" LCD Monitor

Interchangeable Color Skins (beige, black, grey)
 Color Matched Trim Rings for Sculptured Ceilings Included
 90°/90° Swivel Screen for Angeled Viewing
 Single Channel Wireless IR Transmitter (use HP-10S, HP-11S)
 A/V Input for Auxiliary Sources
 Triggered Bright White LED Dome Light
 NTSC / PAL Auto Selection
 800 x 480 16:9 Widescreen Resolution
 400 NIT Screen Brightness
 Dimensions: 14.5" w x 12.5" d x 2.5" h



PT-90CMBG - Beige

PT-90CMBK - Black

Ceiling Mount 9" LCD Monitor

180°/90° Swivel Screen for Angeled Viewing
 A/V RCA Input for Auxiliary Source
 Video RCA Input for Additional Source
 Dual Channel Wireless IR Transmitter (use HP-12S)
 Triggered Bright White LED Dome Light
 NTSC / PAL Auto Selection
 640 x 234 16:9 Widescreen Resolution
 400 NIT Screen Brightness
 Dimensions: 11" w x 10.25" d x 1.75" h



NEW



UNIVERSAL REPLACEMENT HEADREST

PHDM-103

1080p Digital Media Headrest Preloaded w/ 10.3" LCD & MobileLink MHL Input

10.3" High Resolution LCD Screen
1,024 x 600 16:9 Widescreen Resolution
Forward / Backwards Tilting Headrest
3 Changeable Color Skins Included (grey, beige, black)
32GB USB Readers for 1080p MP4 & AVI Playback
Dual Channel Wireless IR Transmitter (use HP-12S)
FM Stereo Transmitter for OEM Integration
MobileLink Input for Smart Device Connectivity
2 RCA A/V Input for Auxiliary Source
RCA Audio Outputs
Hardwired Headphone Output
Full Function Remote Control Included
3/8" Locking Pole w/ 1/2" & 9/16" Adapters
4.75" ~ 8.25" Pole Width Adjustment
NTSC / PAL Auto Selection
Dimensions: 11.75"w x 8.25"h x 4.75"d



GRIP-H

Headrest Mounting Bracket for Mobile Devices



Mobile LINK MHL Interface Cables

HDM-i4 ~ iPhone4, iPhone4S, iPad2, & iPad3

HDM-A2 ~ Galaxy 2 & Select 5-Pin Android Devices

HDM-A3 ~ Galaxy 3, 4, & Select 11-PIN Android Devices

5ft interface cable unlocks 1080p video and audio playback from MHL enabled appropriate micro connector for your mobile device. Fahrenheit MobileLink MHL interface cables also charge your mobile device. Available for select iOS and Android devices.



UNIVERSAL DVD/LCD HEADREST

HDVD-9GR - Grey

HDVD-9GRDK - Dark Grey

HDVD-9BG - Beige

HDVD-9BK - Black

1 Pair Universal Replacement Headrests Pre-Loaded w/
9" LCD Touch Screen, DVD Player, & Headphones

Forward/Backwards Tilting Headrest w/ Swivel LCD Screen
Side Slot-Loading DVD Player In Each Headrest
Playback from DVDR/RW or 720p MP4
Playback from 32GB SD Card or USB of 720p MP4
Independent 900Mhz. RF 2-ch. Headphone Transmitter
2 RF 2-ch. Padded Headphones Included
FM Stereo Transmitter for OEM Integration
RCA A/V Output for Auxiliary Source or Opposite Headrest
Selectable DVD Mode or A/V Input from Opposite Headrest
AUX A/V Input for Game Console or Media Devices
Hardwired Headphone Output
Independent Remote Controls
7/16" Locking Pole w/ 5/8" Adapters
4" ~ 8" Pole Width Adjustment
800 x 480 16:9 Widescreen Resolution
400 NIT Screen Brightness
Dimensions: 12"w x 9"h x 5"d



POWER ACOUSTIK®

HDVD-91CC

Universal Replacement Headrest Preloaded
w/ DVD Player & 9" LCD

Forward/Backwards Tilting Headrest
3 Changeable Color Skins Included (grey, beige, black)
Playback from DVDR/RW of 720p MP4
Playback from 32GB SD Card or USB of 720p MP4
Dual Channel Wireless IR Transmitter (use HP-12S)
FM Stereo Transmitter for OEM Integration
AUX A/V Input for Game Console or Personal Media Devices
RCA A/V Input for Auxiliary Source or Opposite Headrest
RCA A/V Output to Auxiliary Source or Opposite Headrest
Hardwired Headphone Output
3/8" Locking Pole w/ 1/2" & 9/16" Adapters
4.75" ~ 8.25" Pole Width Adjustment
NTSC / PAL Auto Selection
800 x 480 16:9 Widescreen Resolution
400 NIT Screen Brightness
Dimensions: 11.5"w x 8.5"h x 6"d (91CC)



H-91CC

Universal Replacement Headrest
Pre-Loaded with 9" LCD

Forward/Backwards Tilting Headrest
3 Changeable Color Skins Included (grey, beige, black)
Dual Channel Wireless IR Transmitter (use HP-12S)
AUX A/V Input for Game Console Integration
2 RCA A/V Input for Auxiliary Source or Opposite Headrest
Hardwired Headphone Output
3/8" Locking Pole w/ 1/2" & 9/16" Adapters
4.75" ~ 8.25" Pole Width Adjustment
NTSC / PAL Auto Selection
800 x 480 16:9 Widescreen Resolution
400 NIT Screen Brightness
Dimensions: 11.5"w x 8.5"h x 6"d (91CC)



UNIVERSAL DVD/LCD HEADREST

HDVD-75CC

Universal Replacement Headrest Pre-loaded w/ DVD Player & 7" LCD

Forward/Backwards Tilting Headrest
 3 Changeable Color Skins Included (grey, beige, black)
 Front-Loading DVD Player for DVD, MP4 Playback
 On-board 32GB SD/USB Readers for MP4 Playback
 Dual Channel Wireless IR Transmitter (use HP-12S)
 6 ch. FM Stereo Transmitter for OEM Integration
Built-in Optional Full Range Speakers
 Vertical Image Flip & Horizontal Inversion
 AUX A/V Input for Game Console or Personal Media Devices
 RCA A/V Input for Auxiliary Source or Opposite Headrest
 RCA A/V Output to Auxiliary Source or Opposite Headrest
 Hardwired Headphone Output Jack
 3/8" Locking Pole w/ 1/2" & 9/16" Adapters
 4.00"-7.50" Pole Width Adjustment
 NTSC / PAL Auto Selection
 800 x 480 16:9 Widescreen Resolution
 400 NIT Screen Brightness
 Dimensions: 10.5"w x 6"d x 8"h



NEW



H-75CC

Universal Replacement Headrest Pre-Loaded with 7" LCD



Forward/Backwards Tilting Headrest
 3 Changeable Color Skins Included (grey, beige, black)
 Dual Channel Wireless IR Transmitter (use HP-12S)
Built-in Optional Full Range Speakers
 Vertical Image Flip & Horizontal Inversion
 RCA A/V Input for Auxiliary Source or Opposite Headrest
 RCA A/V Output to Auxiliary Source or Opposite Headrest
 3/8" Locking Pole w/ 1/2" & 9/16" Adapters
 4.00"-7.50" Pole Width Adjustment
 NTSC / PAL Auto Selection
 800 x 480 16:9 Widescreen Resolution
 400 NIT Screen Brightness
 Dimensions: 10.5"w x 6"d x 8"h



NEW

HDVD-71CC

Universal Replacement Headrest Pre-loaded w/ DVD Player & 7" LCD



Forward/Backwards Tilting Headrest
 3 Changeable Color Skins Included (grey, beige, black)
 Playback from DVDR/RW of 720p MP4
 Playback from 32GB SD Card or USB of 720p MP4
 Dual Channel Wireless IR Transmitter (use HP-12S)
 FM Stereo Transmitter for OEM Integration
 AUX A/V Input for Game Console or Personal Media Devices
 RCA A/V Input for Auxiliary Source or Opposite Headrest
 RCA A/V Output to Auxiliary Source or Opposite Headrest
 Hardwired Headphone Output
 3/8" Locking Pole w/ 1/2" & 9/16" Adapters
 4.75" ~ 8.25" Pole Width Adjustment
 NTSC / PAL Auto Selection
 800 x 480 16:9 Widescreen Resolution
 400 NIT Screen Brightness
 Dimensions: 10"w x 7"h x 5.5"d(71CC)



H-71CC

Universal Replacement Headrest Pre-Loaded with 7" LCD

Forward/Backwards Tilting Headrest
 3 Changeable Color Skins Included (grey, beige, black)
 Dual Channel Wireless IR Transmitter (use HP-12S)
 AUX A/V Input for Game Console Integration
 2 RCA A/V Input for Auxiliary Source or Opposite Headrest
 Hardwired Headphone Output
 3/8" Locking Pole w/ 1/2" & 9/16" Adapters
 4.75" ~ 8.25" Pole Width Adjustment
 NTSC / PAL Auto Selection
 800 x 480 16:9 Widescreen Resolution
 400 NIT Screen Brightness
 Dimensions: 10"w x 7"h x 5.5"d(71CC)



HEADREST LCD MONITORS

PT-712IRA

7" Dual Channel IR Headrest Monitor

Two Auxiliary A/V Input
Dual Channel IR Transmitter
Wired Headphone Output
Low Reflection TFT-LCD Monitor
Ultra Bright LED Backlighting
Selectable Aspect Modes

Preset/Manual Image Control
Dimmer Control
Remote Control
NTSC/PAL Selection
480 x 234 (16:9) Image Resolution
Cutout Dimensions: 7" w x 4.75" h x .75" d



PT-700MHR

7" LCD Headrest Monitor

7" Amorphous Active Matrix TFT/LCD Monitor
Ultra Bright LED Backlighting
Ignition Power On/Off Optional
Single Video Input
Selectable Aspect Modes
Preset/Manual Image Control
NTSC/PAL Selection

Sculptured Trim Ring Included
Remote Control Included
480 x 234 (16:9) Image Resolution
400NIT Panel Brightness
Cutout Dimension: 7" w x 4.5" h x 1" d



PT-727MSV

7" LCD Sun Visor Monitor

7" Amorphous Active Matrix TFT/LCD Monitor
Ultra Bright LED Backlighting
Ignition Power On/Off Optional
Single Video Input
Selectable Aspect Modes
Preset/Manual Image Control
NTSC/PAL Selection
Sculptured Trim Ring Included
Remote Control Included
480 x 234 (16:9) Image Resolution
400NIT Panel Brightness
Cutout Dimension: 7" w x 4.5" h x 1" d



PTM-430

Universal Clip-on Rear View Mirror w/ Swiveling 4.3" LCD

4.3" Active Matrix LCD Monitor Swivels Adjacent to Mirror
Compression Brackets Attach to Factory Rear View Mirror
2 RCA Video Input for Primary Source & Rear View Camera
Reverse Gear Trigger Activates Rear View Camera Input
Selectable Image Flip & Direction Inversion
Wireless Remote Control Included
400NIT Energy Efficient LED Backlight
480x272 16:9 Widescreen Resolution
3.25" H x 13" L x 0.75" D



NEW

HEADPHONES

HP-10S Single 1ch. IR Headphone

EVA hard carrying case included
Foldable Ear Pads for Compact Storage
On/Off Switch Saves Battery Life
Auto Power Off Function
Auto Mute Function
Variable Volume Control
ALC Auto Level Control



HP-11S Single 1ch. IR Headphone

HP-22IRT Pair 1ch. IR Headphones and Transmitter

Ear Pads Fold Flat for Seat Pocket Storage
Adjustable Headphone Straps
EVA hard Carry Case Included
MP-3 Player Input Via 3.5mm Jack
On/Off Switch Saves Battery Life
Auto Power Off Function
Auto Mute Function
Variable Volume Control
ALC Auto Level Control



HP-12S Single 2ch. IR Headphone

Adjustable Headphone Straps
Channel Selectable From Each Headphone
Ear Pads Fold Flat for Seat Pocket Storage
EVA hard Carry Case Included
MP-3 Player Input Via 3.5mm Jack
On/Off Switch Saves Battery Life
Auto Power Off Function
Auto Mute Function
Variable Volume Control
ALC Auto Level Control



HP-900S Single 2ch. RF 900MHz Headphone

HP-902RFT Pair 2ch. RF 900MHz Headphones & Transmitter

Dual Stereo Audio Inputs
Channel Selectable From Each Headphone
100ft. Operational Distance
Adjustable Headphone Straps
Ear Pads Fold Flat for Seat Pocket Storage
EVA hard Carry Case Included
MP-3 Player Input Via 3.5mm Jack
On/Off Switch Saves Battery Life
Auto Power Off Function
Auto Mute Function
Variable Volume Control
ALC Auto Level Control



WLHP-100 Single 1ch. IR Headphone

WLHP-200 Single 2ch. IR Headphone

Adjustable Headphone Straps
Single Channel UHF IR Receiver
ON/OFF Switch Saves Battery Life
Variable Volume Control
ALC Auto Level Control
Auto Off and Auto Mute



HP-K1B Single 1ch. IR Headphone, Blue

HP-K1P Single 1ch. IR Headphone, Pink

HP-K2B Single 2ch. IR Headphone, Blue

HP-K2B Single 2ch. IR Headphone, Pink

Single IR Headphone
Youth Fit Adjustable Headband
Youth Fit Collapsible Ear Pads
AUX Input for Personal Media Player
Auto Power Saver Function
Momentary Mute Switch
Variable Volume Control
Color Match Carry Bag Included



REAR VIEW CAMERAS

L-3CSC (Chrome)

L-3CSB (Black)

License Plate Mount Night Vision Camera w/ Back-Up Sensors, On-Screen Distance Gauge, & Proximity Alerts

U.S. Patent #7,106,183 B2
2 Object Sensors w/ Proximity Alert
1/4" CCD Color Camera
0.5 LUX Low Light Lens
Waterproof Camera Housing
Waterproof External Wire Connections
Vertically Pivoting Camera Housing
7' Effective Viewing Distance

Inconspicuous Speaker for Alerts
130° Capture Angle
8 IR LEDs for Night Viewing
On-Screen Distance Gauge
RCA Video Output
Cast Steel Alloy
Reversed Image
640 x 480 Resolution



LP-2CSC (Chrome)

LP-2CSB (Black)

License Plate Frame w/ Night Vision Camera, Back-Up Sensors, On-Screen Distance Gauge, & Proximity Alerts

U.S. Patent #7,106,183 B2
3 Object Sensors w/ Proximity Alert
1/4" CCD Color Camera
0.5 LUX Low Light Lens
Waterproof Camera Housing
Waterproof External Wire Connections
Vertically Pivoting Camera Housing
7' Effective Viewing Distance
Inconspicuous Speaker for Alerts
8 IR LEDs for Night Viewing
On-Screen Distance Gauge
130° Capture Angle
RCA Video Output
Cast Steel Alloy Frame
Reversed Image
640 x 480 Resolution



LP-1CA

Chrome License Plate Frame with Camera

Chrome Finish on ABS License Plate Frame
Vertically Pivoting Camera Housing
On-Screen Distance Gauge
1/4" CCD Wide View Color Camera
0.1 LUX Low Light Lens
163° Capture Angle
RCA Video Output
Reversed Image
648 x 488 Resolution



CCD-6XS

Water-Proof Surface Mount Rear View Camera

1/3" CCD GHigh Definition Color Camera by PixelPlus
IP67 Waterproof Nickel Plated Zinc Alloy Housing
Threaded Mounting System for Easy DIY Installation
Vertical Image Inversion for Front/Rear Application
Optional On-Screen Distance Gauges
Rear View Image Pre-Reversed
RCA Video Output
163° Viewing Angle
0.1 LUX Low Light Lens
682x496 Resolution



CCD-4XS

1" Surface Mount Rear View Camera

Vertically Pivoting Mounting Bracket
Waterproof Camera Housing
On-Screen Distance Gauge
1/4" CCD Color Camera
0.1 Lux Low Light Lens
163° Capture Angle
RCA Video Outputs
Reversed Image
648 x 488 Resolution



RVC-3

Surface Mount Rear View Camera

1/3" Color CCD Color Camera
IP67 Waterproof Nickel Plated Zinc Alloy Housing
Threaded Mounting System for Easy DIY Installation
Rear View Image Pre-Reversed
RCA Video Output
180° Viewing Angle
0.5 LUX Low Light Lens

NEW 



RVC-2

Pivoting Rear View Camera

1/4" Color CCD Camera
IP67 Waterproof Plastic Housing
Spring Clip Mounting for Easy DIY Install
Rear View Image Pre-Reversed
RCA Video Output
180° Viewing Angle
0.2 LUX Low Light Lens

NEW 



RVC-1

Surface mount rear view camera

1/4" Color CCD Camera
IP67 Waterproof Plastic Housing
Rear View Image Pre-Reversed
RCA Video Output
180° Viewing Angle
0.2 LUX Low Light Lens

NEW 



VB-1

One In & Four Output Video Signal Booster

Four Individual Output Trimmer Gain Controls
Shielded Metal Housing For Noise Rejection
4 Video Output Gain control



EFM-02

PLL FM Modulator

PLL Phase Lock Loop Tuner Outputs
Frequency Settings Via Slide Switch
Ground Loop Isolator Circuit
Shielded Metal Housing For Noise Rejection



FMT-3

FM Transmitter

Wireless 3 CH FM Transmitter
Shielded Housing For Noise Rejection
Easy Installation



ANT-4VCR

Booster Antenna

Mini-plug/RG-59 Cable Style Connector
Single Channel Input 20dB Gain
Cable Length 12 Feet
Receives Signals On Ch. 2-13 & 14-69
Output Impedance: 75 Ohm



XENON BULBS

SUPERWHITE BULBS



H1
12V 100W



H3
12V 100W



H4
12V 100W/90W



H7
12V 100W



H8
12V 35W



H9
12V 65W



H11
12V 55W



9004
12V 100/80W



9005
12V 100W



9006
12V 80W



9007
12V 100/80W



H13/9008
12V 65W/55W



880
12V 27W



ALL MODELS COME IN PAIRS



WWW.POWERACOUSTIK.COM

©2014 POWER ACOUSTIK

MONTEBELLO, CALIFORNIA, U.S.A ALL RIGHTS RESERVED

SPECIFICATIONS AND DESIGNS ARE SUBJECT TO CHANGE WITHOUT NOTICE.

PRINTED IN U.S.A